

### **FEATURES**

• Provide safety, reliability and are cost effective

# RS PRO M5 x 10mm Shoulder Bolt

RS Stock No.: 292-271



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



**Product Description** 

These hexagon socket shoulder screws feature a small cylindrical head with tall vertical sides. The socket screws are ideal when you have less room for wrenches. They have tall vertical sided means they also have space saving advantages.

Our RS Pro metric threaded socket head shoulder screws are produced in 12.9 grade black, selfcolour steel.

#### **General Specifications**

| Head Shape   | Hex Socket Shoulder  |
|--------------|--|
| Material     | Steel  |
| Finish       | Plain  |
| Thread Type  | Metric   |
| Applications | Manufacturing and repair of vehicles, Machine tooling,<br>Machine production, Repair and general engineering,<br>Domestic, Construction industry |

#### **Mechanical Specifications**


| Thread Size       | M5                |
|-------------------|-------------------|
| Thread Pitch      | 0.8mm             |
| Thread Length     | 9.75mm to 9.25mm  |
| Length            | 10mm              |
| Nominal Diameter  | 6mm               |
| Shoulder Diameter | 6mm               |
| Shoulder Length   | 10mm              |
| Head Diameter     | 10.22mm to 9.78mm |
| Head Height       | 4.5mm             |



Approvals

**Compliance/Certifications** 

Din 912/ISO 7380 standard

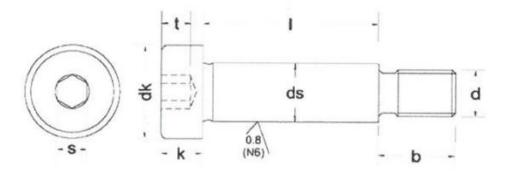





# **Shoulder Bolts**



|       |         | 6mm   | 8mm   | 10mm  | 12mm   |         | 1   |       |
|-------|---------|-------|-------|-------|--------|---------|-----|-------|
| ds    | Nominal | 6     | 8     | 10    | 12     | Nominal | Min | Max   |
|       | Max     | 5.990 | 7.987 | 9.987 | 11.984 | 10      | 10  | 10.25 |
|       | Min     | 5.960 | 7.951 | 9.951 | 11.941 | 12      | 12  | 12.25 |
| d     |         | M5    | M6    | M8    | M10    | 16      | 16  | 16.25 |
| Pitch |         | 0.8   | 1     | 1.25  | 1.5    | 20      | 20  | 20.25 |
| dk    | Max     | 10.22 | 13.27 | 16.27 | 18.27  | 25      | 25  | 25.25 |
|       | Min     | 9.78  | 12.73 | 15.73 | 17.73  | 30      | 30  | 30.25 |
| k     | Max     | 4.5   | 5.5   | 7     | 8      | 40      | 40  | 40.25 |
|       | Min     | 4.32  | 5.32  | 6.78  | 7.78   | 50      | 50  | 50.25 |
|       | Nominal | 3     | 4     | 5     | 6      | 60      | 60  | 60.25 |
| 5     | Max     | 3.02  | 4.095 | 5.095 | 6.02   |         |     |       |
|       | Min     | 3.08  | 4.02  | 5.02  | 6.095  |         |     |       |
| t     | Min     | 2.4   | 3.3   | 4.2   | 4.9    |         |     |       |
| ь     | Max     | 9.75  | 11.25 | 13.25 | 16.40  |         |     |       |
|       | Min     | 9.25  | 10.75 | 12.75 | 15.60  |         |     |       |

## Please view our full range listing below

| RS Stock No | Size (mm)      | RS Stock No | Size (mm)       |
|-------------|----------------|-------------|-----------------|
| 292271      | 6mm (M5) x 10  | 292338      | 10mm (M8) x 25  |
| 399161      | 6mm (M5) x 12  | 292344      | 10mm (M8) x 30  |
| 399167      | 6mm (M5) x 16  | 292350      | 10mm (M8) x 40  |
| 292287      | 6mm (M5) x 20  | 292366      | 10mm (M8) x 60  |
| 399177      | 6mm (M5) x 30  | 292372      | 12mm (M10) x 16 |
| 399173      | 8mm (M6) x 12  | 8229316     | 12mm (M10) x 20 |
| 292293      | 8mm (M6) x 16  | 292388      | 12mm (M10) x 25 |
| 292300      | 8mm (M6) x 20  | 292394      | 12mm (M10) x 30 |
| 1247266     | 8mm (M6) x 50  | 292401      | 12mm (M10) x 40 |
| 1247267     | 10mm (M8) x 12 | 8229319     | 12mm (M10) x 50 |
| 292316      | 10mm (M8) x 16 | 292417      | 12mm (M10) x 60 |
| 292322      | 10mm (M8) x 20 |             |                 |
|             |                |             |                 |