


REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1931	A	Released	DCM	8/2/07	JN	8/2/08	JN	8/2/08
2068	B	Notes Updated	JN	08-19-09	JWM	08-19-09	JWM	08-19-09

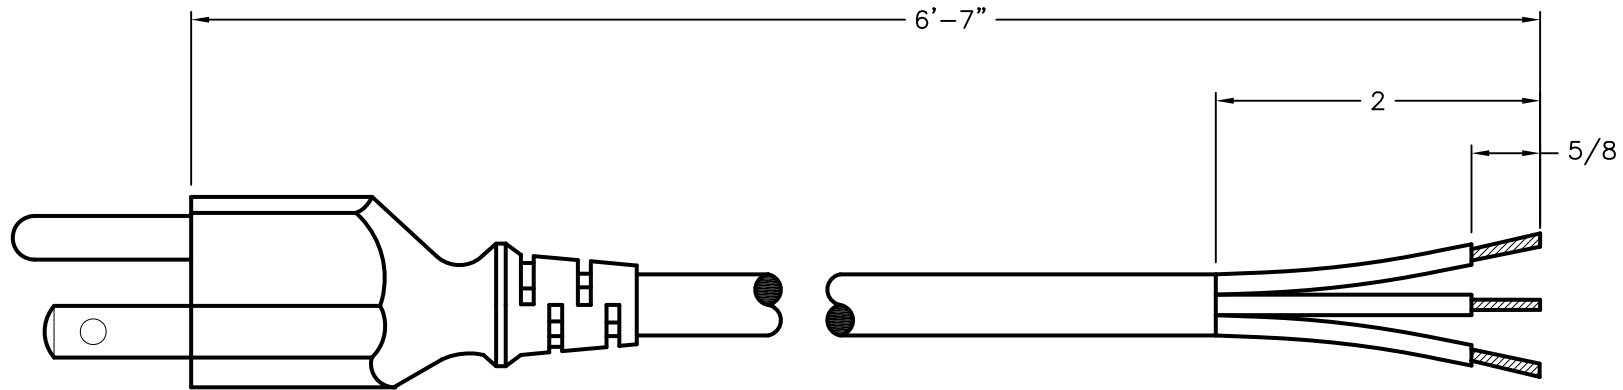

NEMA 5-15P

Notes

Cordage: SJT, 14AWG/3C, Unshielded,
 CEE Color Code, Black, Temp Rating 60°C
 Conductor: Cross section mm² 2.08
 Strands/mm: 41/0.254
 Insulation: Thickness mm: 0.85
 O.D. mm: 3.6
 Jacket: Thickness mm: 0.95
 O.D. mm: 9.6
 Cord Rated Voltage: 300V
 Assembly Rated Voltage: 15A/125V
 Jacket material: PVC

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Dan McVicker	8/2/07
CHECKED BY:	DATE:
Jason Nash	2/11/08
APPROVED BY:	DATE:
Jason Nash	2/11/08

DRAWING TITLE: Power Cords, 3 Conductors, Unshielded			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC13280	11J3557.dwg	B
SCALE: NTS	U.O.M.: Inches	SHEET: 1 OF 1	