


Datasheet

Red Telephone Slide LED Indicator Lamp

RS Stock number 204-502

Dimensions (mm):

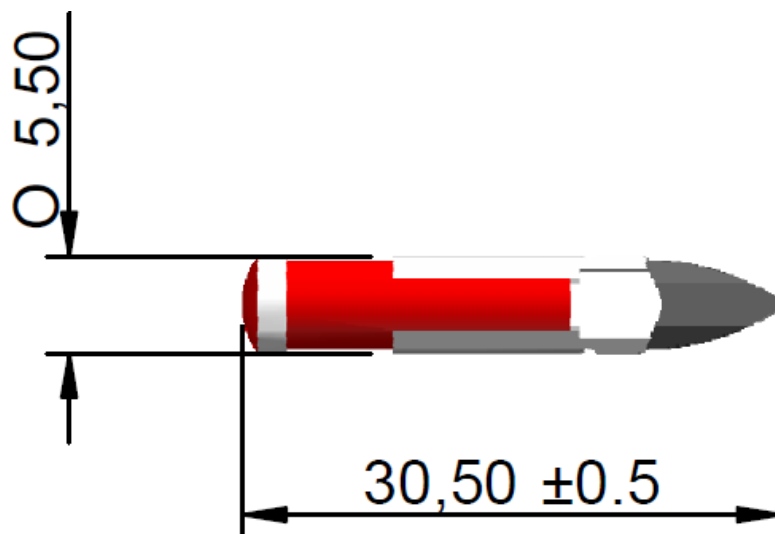

Specifications:

| | | | | | |
|------------------|-----------------|--------------------------|----------------------|-----------|--------------|
| LED/Multiled | <i>Multiled</i> | Optimum voltage (V) | <i>24vdc</i> | Intensity | <i>35mcd</i> |
| Mounting Size | | Rectifier | | | |
| Mounting Finish | | AC current | | | |
| Protection | | DC current | <i>15mA</i> | | |
| Mount Holder | <i>T5.5k</i> | Voltage Tolerance(%) | <i>10%</i> | | |
| Chip Qty | <i>6</i> | Optimum temperature (°C) | <i>-30°C...+60°C</i> | | |
| Indicator colour | <i>Red</i> | Storage temperature (°C) | <i>-30°C...+60°C</i> | | |
| Wavelength (nm) | <i>635</i> | Contact Tab x 2 | <i>T5.5k Base</i> | | |