

Datasheet

SPDT PCB ON-(ON) Push Button Switch


RS Stock number 734-6791



Specifications:

Mechanical Life:	50,000 make-and-break cycles
Contact Resistance:	20m Ω max. Initial @ 2-4V DC, 100mA for both silver and gold plated
Insulation Resistance:	1,000M Ω min.
Dielectric Strength:	1,000Vrms @ sea level
Operating Temperature:	-30°C to 85°C
Case:	Diallyl phthalate (DAP) (UL94V-0)
Plunger:	Glass filled nylon or glass filled polyester
Bushing:	Brass, nickel plated
Housing:	Stainless Steel
Terminal/Contact:	Silver or gold plated
Rating:	R: 0.4VA max. @ 20V max. (AC or DC) Q: 1A @ 250VAC 3A @ 120VAC or 28VDC

**Dimensions – inch
mm**

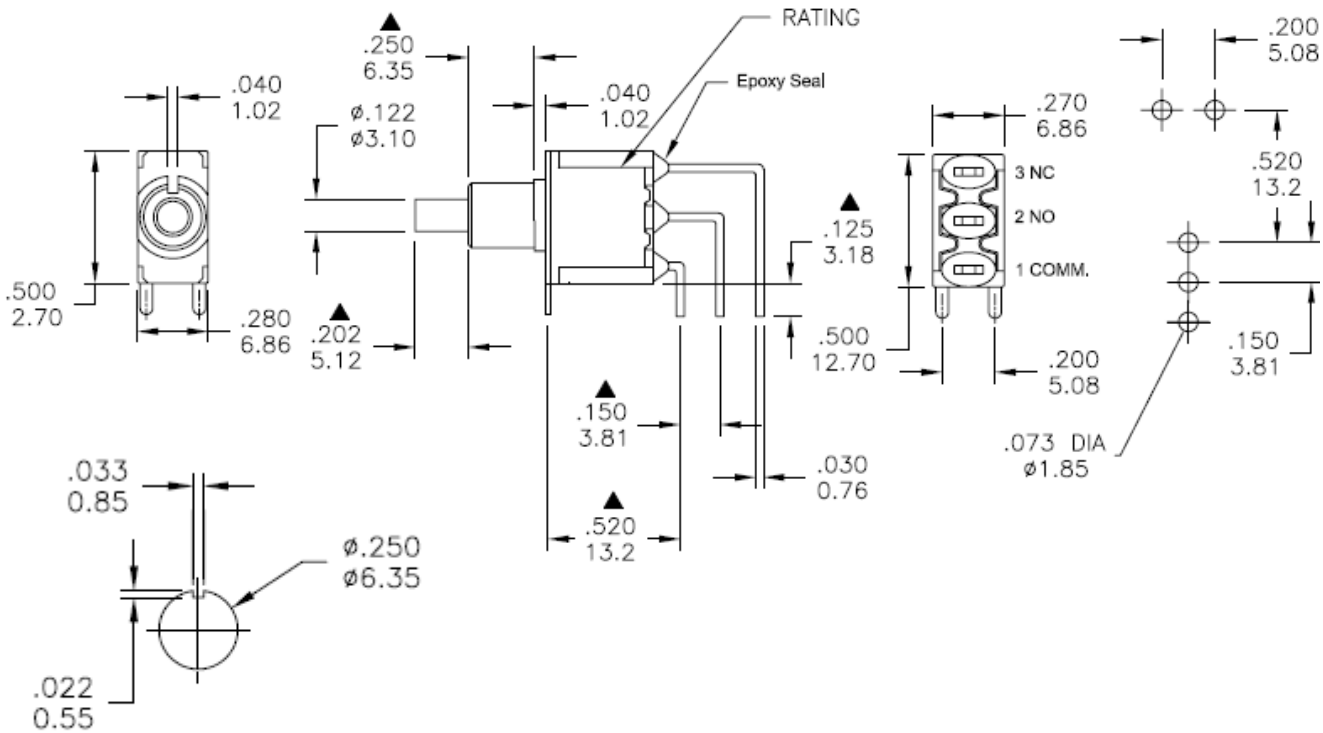

PANEL MOUNTING

P.C.MOUNTING

Model No.	POS,1	POS,2
7MS7	ON	MOM
Term. Comm.	1-3	1-2
SCHMATIC		

SWITCH FUNCTION