


KYOWA

JET CLEANER & TEST PUMP

T-50KP TEST PUMP

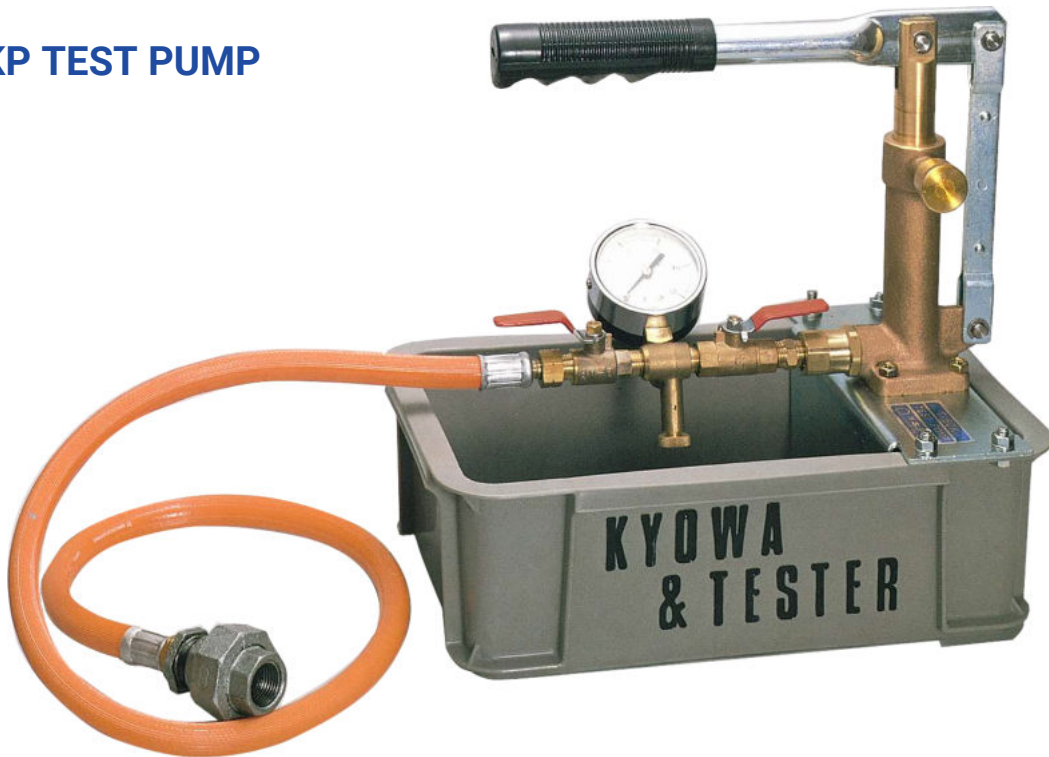

Technical data

Model No.	T-50KP	Tank Capacity (L)	4.5 Plastic Tank
Max. Pressure (kg/cm²)	50 (~ 49 bar)	Size of Discharge Nozzle	1/4
Plunger Diameter (mm)	22	Weight (kg)	3.3
Stroke (mm)	35	Dimensions (L x H x W) (mm)	320 x 300 x 200
Suction Per Stroke (c.c)	13	Accessories	Pressure gauge 1/4 PT, Pressure hose, Union joint 1/2", Bushing 1/2"x1/4"

T-50KP Hydraulic Pressure Test Pump

Common used to check fluid pressure vessel, such as, cylinders, boiler, tubes pipe, etc.

Kyowa T-50KP test pump an excellent choice to suit all pressure test application.

Features :

1. High-precision stainless steel (SUS 304) ball valve is applied as the valve.
2. Valve seat is replaceable with ease.
3. Water tank of rust-free plastic (P.P.) construction unchanging cleanliness.
4. The plunger packing used is standard product, O-ring No. P-22 which is available in local hardware dealers.
5. All fulcrum pins applied are made of stainless steel.
6. A full range of accessories are provided to permit on-the-spot job.
7. Matchless compact and light-weight design in the world.



+65 6296 7711

<https://huphong.com.sg>

101 Kitchener Road, #01-12/14 Jalan Besar Plaza, Singapore 208511