


Datasheet

IP67 SPDT Toggle Switch On-Off 5 A Through Hole

RS Stock number [734-6990](#)

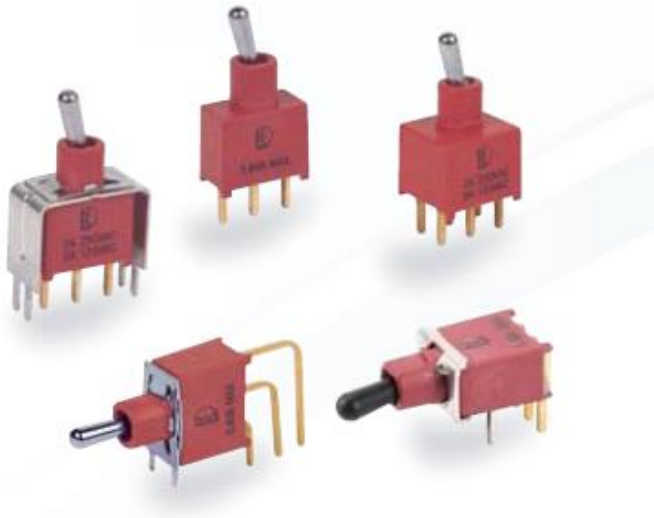

Specifications:

Contact Rating:	Dependent upon contact material
Mechanical Life:	30,000 make-and-break cycles
Contact Resistance:	10 mΩ max. initial @ 2-4VDC 100mA for both silver and gold plated contacts
Insulation Resistance:	1,000 mΩ min.
Dielectric Strength:	1,000 Vrms min. @ sea level
Operating Temperature:	-30°C to 85°C
Case & Bushing:	Glass filled nylon 6/6, flame retardant, heat stabilized (UL94v-0)
Actuator:	Brass, chrome plated with internal, O-ring seal Standard
Switch Support:	Brass or steel, tin plated
Switch Support Retainer:	Stainless Steel
Contact/Terminals:	Copper alloy with silver or gold plated