

Features

- USB 3.1 Type C
- USB 3.0 Type A
- Adaptor Cable
- Black
- 5 Pack

RS PRO 15cm USB 3.1 type C Male – USB 3.0 A Female Adaptor Cable – 5 Pack

RS Stock No. 2668504



RS Professionally Approved Products bring to you, professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 15cm USB version 3.1 type C male to USB version 3.0 type A female cable has a black PVC jacket and connector hoods. The cable flex has copper wire conductors and drain wire, with an aluminium braid, foil shielding and has an outer diameter of 4.5mm.

The connectors are nickel and have a strain relief to help avoid the cable splitting around the edge of the boot.

USB 3.1 supports 20-volt, 3-amp power delivery, this cable has a 5.1KΩ resistor to prevent too much power getting to a USB 3.0 device.

General Specifications


USB Type	USB 3.1
Connector A	Male USB Type C
Connector A Type	USB 3.1
Connector A Gender	Male
Connector B	Female USB Type A
Connector B Type	USB 3.0
Connector B Gender	Female
Connector Style	Straight
Data Transfer Rate	5Gbps
Outer Sheath Material	PVC
Sheath Colour	Black
Connector Plating	Nickel
Pin Construction	Copper

Approvals

Standards Met	CE UKCA ROHS REACH
Declarations	CE UKCA ROHS REACH

Similar Products

Parameters	1820-8849
Brand	RS PRO
Pack Size	1
USB Type	USB 3.1/3.0
Connector A	USB 3.1 Type C
Connector A Type	USB 3.1
Connector A Gender	Male
Connector B	USB 3.0 A
Connector B Type	USB 3.0
Connector B Gender	Female
Connector Style	Straight
Data Transfer Rate	5Gbps
Outer Sheath Material	PVC
Sheath Colour	Black
Connector Plating	Nickel
Pin Construction	Copper

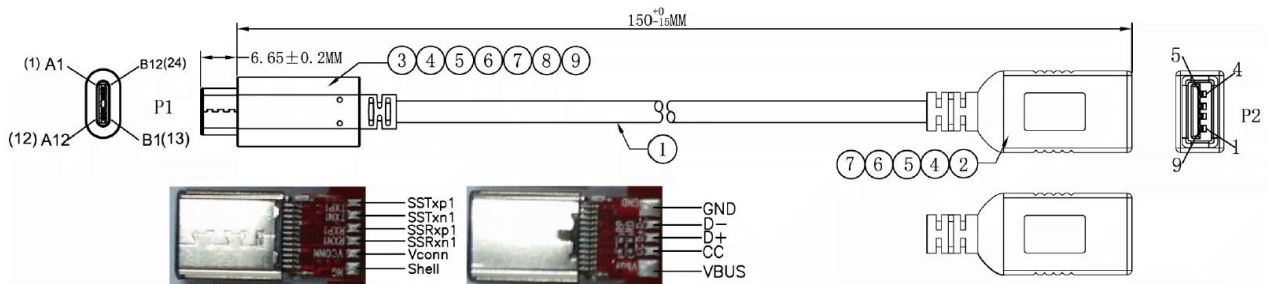

9	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel up ~ (No riveting claw)
8	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel Down~ (No riveting claw)
7	H.S.T ϕ 1.0 Thin wall
6	H.S.T ϕ 2.5 Thin wall
5	TRANSPARENT PE ROHS LDPE
4	45P Black PVC ROHS
3	TYPE-C Connector With~EMPTY PCB+SMT (Stick a 5.1 K resistor Used for USB3.0 CM / BM. CM/ Micro BM. CM/AF)
2	USB3.0 (A) F SOLDER TYPE BLUE INSULATION SHELL PLATED:GOLD W/HOOD PLATED:NICKEL
1	USB3.0~UL2725~[30AWG(7/0.10TC)+EAM]*2P+[30AWG(7/0.10TC)+A]*1P+24AWG(7/0.20TC)*2C+AEB(16/7/0.12TC 85%TC)OD:4.5MM^BLACK^NO MARKING

