



## Product Datasheet


ENGLISH

# SCRD TWISTED PAIR-3 50M

RS Article No: 812-4696



### Cross Section:

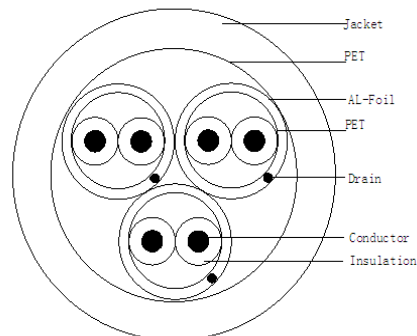

**Cable Marking:** 3PR 22AWG SCR D TWIST 001M...50M

#### Construction:

**Conductor:** Tinned Copper

**AWG:** 22

**Structure:** 7/0.254

**Conductor Dia. Nom. (mm):** 0.76

**Insulation:** PP

**Average Thickness(mm):** 0.25

**Insulation Dia. Nom.( ± 0.20mm):** 1.25

**Twisted:** 2C

**PET(Each Pair):** YES

**Drain (Each Pair):** Tinned Copper

**Structure:** 7/0.25

**AL-Mylar(Each Pair AL Facing in)**

**PET(Each Pair):** YES

**Assembly:** 3P

**PET(Overall):** YES

**Sheath:** PVC

**Average Thickness(mm):** 0.90

**Min point Thickness(mm):** 0.75

**Outer Dia. Nom.( ± 0.50mm):** 7.90

#### Colour:

**Insulation colours:** Black-Red Black-White Black-Green

**Jacket color:** Grey RAL7037

#### Electrical Characteristics:

**Max. Conductor DC Resistance @20°C (ohms/km):** 54.0