


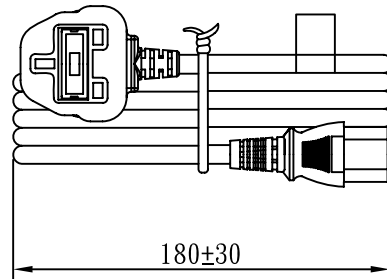


MARKING:

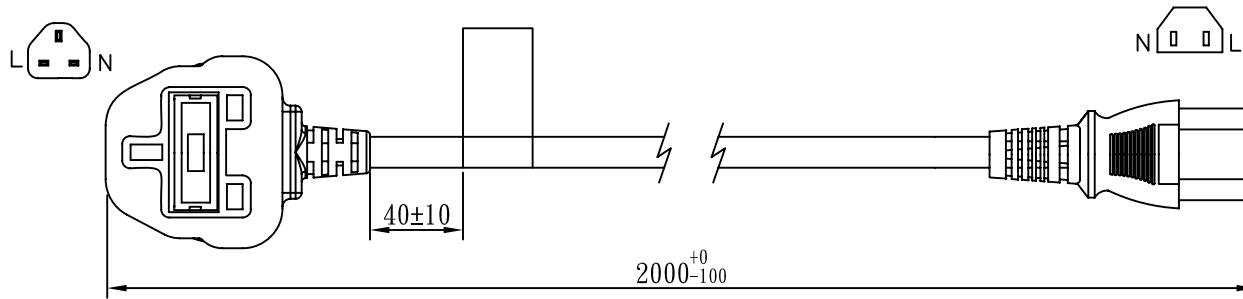

MARKING:

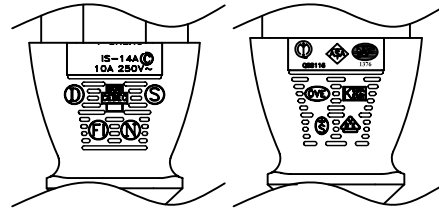

WIRING COLOR:

N: Blue
L: Brown

LENGTH ON CORD: (202-14)

SGIS <VDE> KEMA-KEUR H05VVH2-F <VE> Δ CE BEC 809 S D N I
 NF-USE 1346 IEMMEQU H05VVH2-F 2x0.75mm² 60227 IEC 53 RVV 300/500V CCC
 A003083 2LSF/75 4V-75 V-75 (75°C) 250/440V ORDINARY DUTY Q88228 -LF- CE

No	BOM ITEM	Q' TY	P/N
1	SP-62 NICKEL INSERT	1 pcs	MB062012
2	FUSE 10A	1 pcs	KFB0010A
3	SP-63 FIRE WIRE TERMINAL	1 pcs	BEN63L00
4	SP-62 FUSE COVER	1 pcs	MI0622RA
5	SP-62 INNER BODY	1 pcs	MI062002
6	PVC 45P (SA87, SP-62)	40 g	RPP04512
7	KPR-14 BLADE	2 pcs	BBB14000
8	IS-14A INNER BODY	1 set	MI014A00
9	PVC 45P (SA87, IS-14A)	22 g	RPP04512
10	PE TIE (BLACK,6 inch)	1 pcs	KBB10006
11	LABEL 10A	1 pcs	KLC10010



CABLE		H05VVH2-F 2x0.75 凹 CT-12 (BLACK)		
PLUG	SP-62 + IS-14A (10A)	LENGTH	1950	UNIT mm
CLIENT	NAME	First connectivity	N/W	0.170573
	P/N		SG DWG	SR-141586-21
			Design. by	賀艷紅(2014.06.30)
			Review. by	朱曉玲(2014.06.30)
			Approval. by	周德雲(2014.07.01)
B64		6B2013	12	195 00