NO	DESCRIPTION	DATE
1	DEL CABLE RETENTION	11.12.09'
2	DEL INTERFACE	08.05.11'
3	WORKING VOLTAGE → VOLTAGE RATING DEL PROOF VOLTAGE	11.23.12'
4	ADD VSWR	05.21.14'

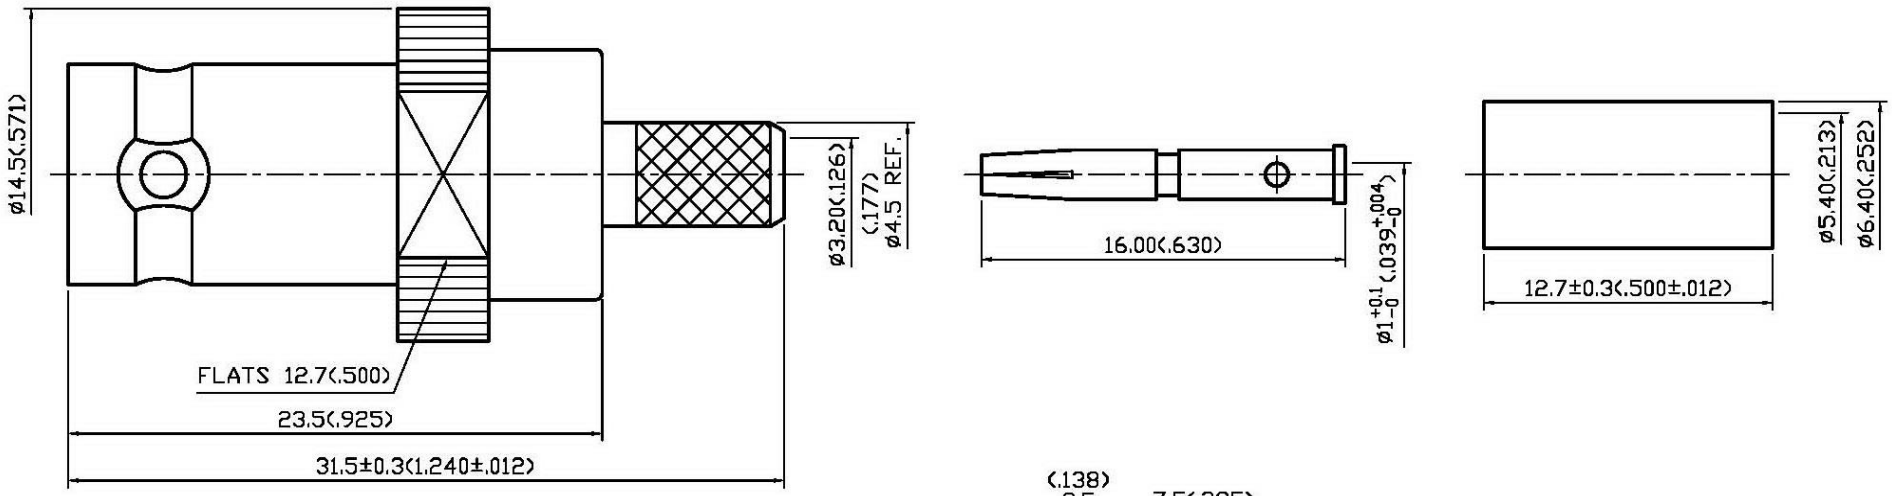



STRIPPING DIMENSION
SCALE 2:1

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC–4 GHz
1.2 NOMINAL IMPEDANCE: 50 OHMS
1.3 VOLTAGE RATING: 500 VOLTS MAX. 3
1.4 VSWR: 1.5 MAX. 4

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS–C3604
2.2 CENTER CONTACT: BRASS PER JIS–C3604
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
2.4 CRIMP FERRULE: BRASS PER JIS–C2700

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 FOR USE WITH RG58U OR SIMILAR STYLE CABLE
4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP
4.3 CRIMP SIZE REQUIRED: CONTACT: 1.8(.071) HEX. CRIMP TOOL
FERRULE: 5.5(.216) HEX. CRIMP TOOL

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: –65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
4	BODY	BRASS	1	NICKEL 100μ" MIN.
3	INSULATION	TEFLON	1	NONE
2	CENTER CONTACT	BRASS	1	GOLD
1	CRIMP FERRULE	BRASS	1	NICKEL

APPROVED by _____ DATE: _____

DESCRIPTION	BNC STRAIGHT JACK CRIMP								
製圖	DRAWN: Yoko	TOLERANCE		品名 TITLE	13-15-1 T.G.N 58U (50Ω) \ROHS COMPLIANT	日期	DATE 11.25.92'	版次	REV. B-4
檢圖	CHECK: Arc	.X	±0.2	單位	UNIT mm(in)	DWG.NO.	13-0134		
		.XX	±0.1						
認定	APPROVAL: Angela	.XXX	±0.05	比例	SCALE 4:1				
		ANGLE	±5°						