




ENGLISH

# Datasheet

## Stock No. 1863078

### RS PRO Connector Assembly

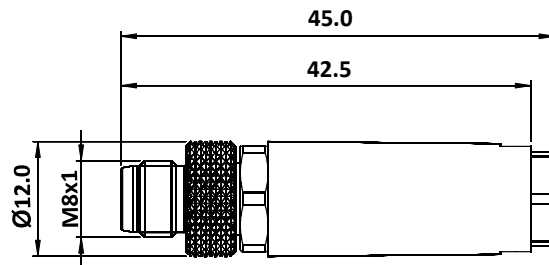

M08 Male Straight

Product may differ from image

#### General Specification


Rated Operational Voltage	30 V
Current Rating	3A
Insulation Resistance	$\geq 100 \text{ M}\Omega$
Temperature Range	-25°C ... +75°C
Degree of Protection	IP67

#### Material Specification

Grip Material	Nylon 66
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Colour	Black
Termination	Screw
Pole	4
Cable Gland	PG5
Coupling Nut	Brass Nickel-plated

All dimensions are in mm.

#### Pin Diagram



#### \*Accessories

Recommended screw driver:

Part no. 2250632 (Art. 3675.025)  
Make: Corolus



\*Accessories are not in our scope of supply.

Specifications are subject to change without notice.



Type Approved  
Safety  
Regular Production  
Surveillance  
www.tuv.com  
ID: 1111210482

