


Datasheet

Red Insulated Crimp Receptacle

RS Stock number [534-339](#)

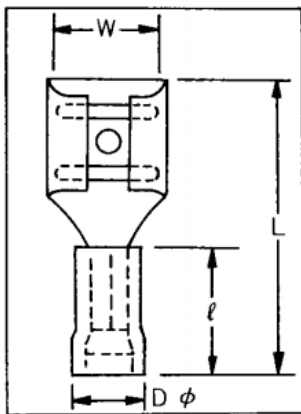

Wire Range

Dimensions

Tab Size

| Stock no. | Insulation Colour | AWG | mm ² | W | Dφ | L | ℓ | AWG | mm |
|-----------|-------------------|-------|-----------------|-----|-----|------|------|-----------|---------|
| 2082442 | Red | 22-16 | 0.5-1.5 | 4.0 | 4.3 | 19.0 | 9.8 | .110x.020 | 2.8x0.5 |
| 534345 | Red | 22-16 | 0.5-1.5 | 4.0 | 4.3 | 19.0 | 9.8 | .110x.020 | 2.8x0.8 |
| 534389 | Red | 22-16 | 0.5-1.5 | 5.8 | 4.3 | 19.0 | 9.8 | .187x.020 | 4.8x0.5 |
| 534395 | Red | 22-16 | 0.5-1.5 | 5.8 | 4.3 | 19.0 | 9.8 | .187x.020 | 4.8x0.8 |
| 534339 | Red | 22-16 | 0.5-1.5 | 7.6 | 4.3 | 20.5 | 9.8 | .250x.032 | 6.3x0.8 |
| 534733 | Blue | 16-14 | 1.5-2.5 | 5.8 | 4.9 | 19.0 | 9.8 | .187x.020 | 4.8x0.5 |
| 534749 | Blue | 16-14 | 1.5-2.5 | 5.8 | 4.9 | 19.0 | 9.8 | .187x.032 | 4.8x0.8 |
| 534698 | Blue | 16-14 | 1.5-2.5 | 7.6 | 4.9 | 20.5 | 10.0 | .250x.032 | 6.3x0.8 |
| 534531 | Yellow | 12-10 | 2.5-6.0 | 7.6 | 6.6 | 24.6 | 13.7 | .250x.032 | 6.3x0.8 |