

## Datasheet

### Miniature Toggle Switch



RS Stock number 734-7129




#### Specifications:

MECHANICAL LIFE:	40,000 make-and-break cycles.
CONTACT RESISTANCE:	10m $\Omega$ max. initial @ 2-4VDC 100mA for both silver and gold plated contacts
INSULATION RESISTANCE:	1000M $\Omega$ min.
DIELECTRIC STRENGTH:	1,000Vrms min. @ sea level.
OPERATING TEMPERATURE:	-30°C to 85°C.
CASE:	Dially phthalate (DAP) UL94v-0)
ACTUATOR:	Brass, chrome plated
BUSHING:	Brass, nickel plated
HOUSING:	Stainless steel
CONTACT/TERMINAL:	Silver or gold plated
Switch Support:	Brass, tin plated
RoHS:	2002/95/EC

**Dimensions – inch  
mm**

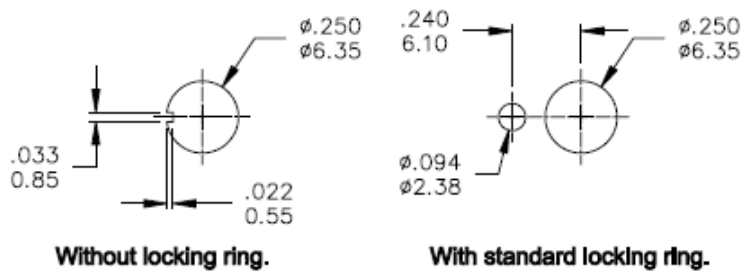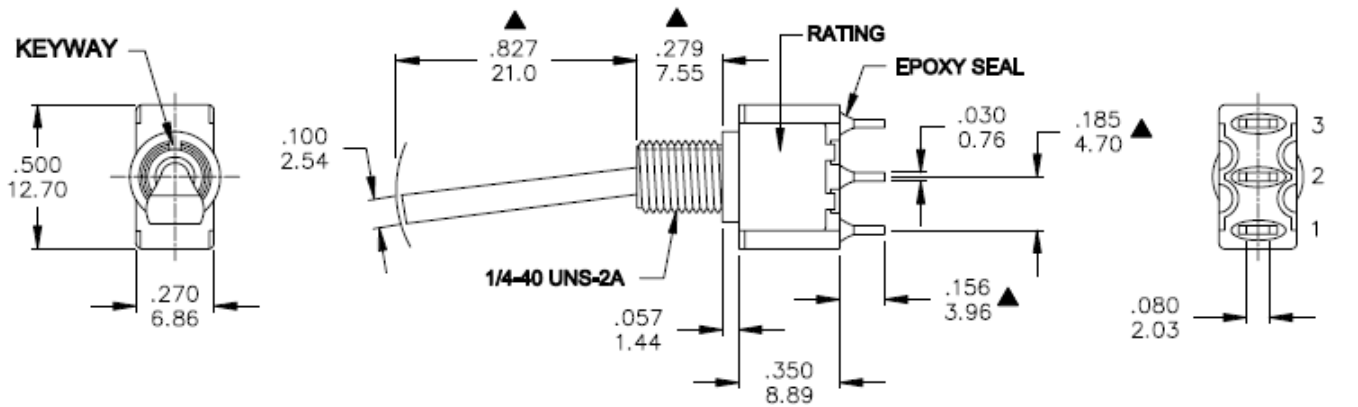

**PANEL MOUNTING**

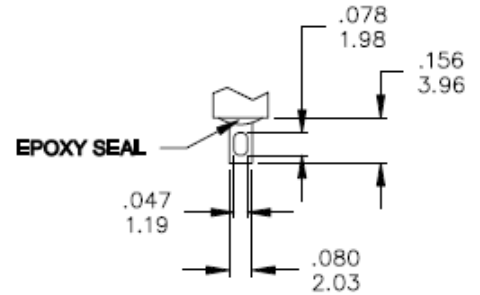

**SOLDER LUG**

Model No.	POS.1	POS.2	POS.3
	1MS2	ON	NONE
Term. Comm.	2-3	N/A	2-1
SCHEMATIC			

**SWITCH FUNCTION**