


FEATURES

- Very reliable
- Very sturdy
- Easy to fit
- Good short time

RS PRO PE90SH 4R7 J

RS Stock No.: 2274848

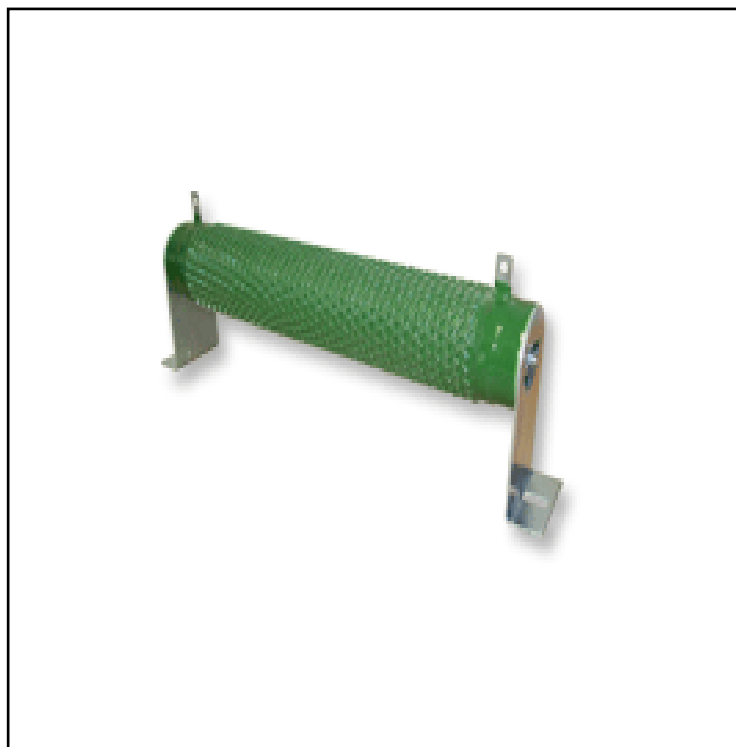

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Vitreous Enamelled Resistors are available in a range from 90 Watts to 750 Watts.

The Nickel-Chrome winding is completely protected by several coats of vitreous enamel, which have been fired to produce a high reliability resistor, capable of withstanding adverse conditions.

Resistors are supplied with terminal tags suitable for screws, or on some sizes, for 'Faston' terminals.

Terminal bands are spot welded in position on the heat resistant ceramic former, and the winding in turn spot welded to the terminal before the enamelling process. The terminal bands are therefore an integral part of the resistor, protected by the vitreous coating

General Specifications


Wire wound resistor, rated at 90 watts, resistance value 4.7 Ohms, running temperature around 280 degrees C, after 15 minutes

Electrical Specifications

Rated at 90 watts @ 4R7 Ohms

Additional Information

Custom Tariff Number 8533 2900

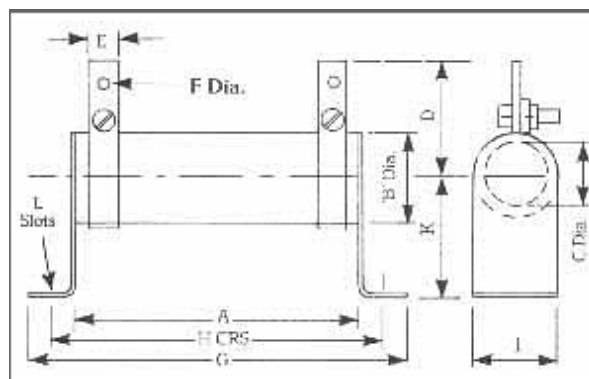

A	B	C	D	E	F	G	H	HR	J	K	R
102	32	19	37	9.5	5	142	126	80	28	27	5x13