


Datasheet







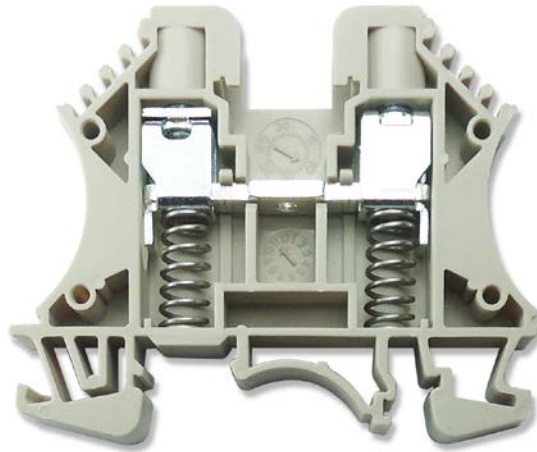


Stock No: 913-1226

Spring Loaded Terminal Blocks, 6sq.mm

Screw Clamp Spring Loaded Terminal Blocks, 50A, 600V, 22-8 AWG, 0.5-6 sq.mm



Specifications:

Specifications		6mm ²
Technical Data		Rated voltage / Rated current / Wire size
UL		600V / 50A / AWG 22-8
CSA		600V / 50A / AWG 22-8
IEC		800V / 41A / 0.5-6mm ²
Insulating impulse voltage withstand/pollution degree		8KV / 3
Torque (in -lbs)		14
Clamping Screw (M)		M4
Insulation stripping length (mm)		12~14 mm
Net weight per piece		15.3 g
Material / Available Color (Standard Color: Beige)		 Beige 913-1226
Rail Dimensions		T / W / H (mm)
For TS35x7.5		8 x 60 x 49.1
For TS35x15		8 x 60 x 56.6
Accessories		Cat. No.
End Bracket		878-7553
		878-7556
End plate		878-7540
Cross		913-1311
Marking Tags		913-1282
		913-1318

Dimensions in mm:

