


Datasheet

Screw Earth Terminal

RS Stock number 872-4701

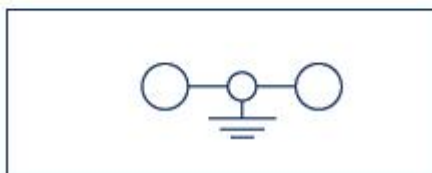

Protective earth terminal
2 connections

Specifications

Rated cross-section, mm² | AWG: 50 | 8-0

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: B10 | V 0

Connection data

Single wire (solid) | stranded, mm²: 10-95 | 10-70

Finely-stranded | finely-stranded: 10-50 | 10-50

(w/ferrules DIN 46 228/1), mm²

Clamping area, mm²: 10-70

Stripping length, mm: 24

Torque, Nm | Screw: 3.5-6 | Hexagon socket M6