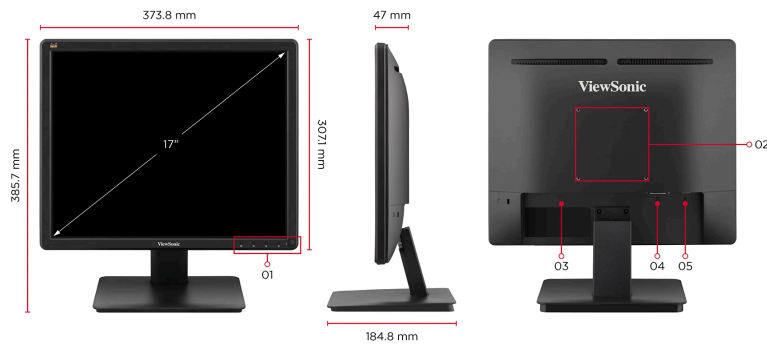## Key **Features**

- 75Hz Refresh rate delivers fluid visuals
- Eye ProTech for comfortable viewing
- VGA and DVI inputs for flexible connectivity
- Eco-mode for low energy consumption
- Various ViewMode color rendering options

Product **Description**

The ViewSonic VA709 is a 17" high 1280 x 1024 resolution monitor featuring VGA and DVI inputs for business and home use. The optimal screen performance and comfortable viewing is delivered through Eye ProTech technology, and various ViewMode presets. Experience truly seamless multitasking on just one screen with a VESA-compatible mount at a low power consumption.

373.8 mm
47 mm
307.1 mm
385.7 mm
17"
01
184.8 mm
02
03   04 05

1. Menu Control Panel
2. VESA Compatible(Wall Mount 100 x 100mm)
3. Power In
4. DVI
5. VGA

Visit Us   www.viewsonic.com

DISPLAY

Display Size (in.):	17
Viewable Area (in.):	17
Panel Type:	TN Technology
Resolution:	1280 x 1024
Resolution Type:	SXGA (Super XGA)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + Hi-FRC)
Aspect Ratio:	5:4
Response Time (Typical Tr+Tf):	5ms
Viewing Angles:	170º horizontal, 160º vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Low Blue Light:	Software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 103% size (Typ)
Pixel Size:	0.264 mm (H) x 0.264 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1280x1024
Mac® Resolution (max):	1280x1024
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1280x1024

CONNECTOR

VGA:	1
DVI-D (Dual Link):	1
Power in:	3-pin Socket (IEC C14 / CEE22)

POWER

Eco Mode (Conserve):	10W
Eco Mode (optimized):	12W
Consumption (typical):	14W
Consumption (max):	16W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

ADDITIONAL HARDWARE

Kensington Lock Slot:	1

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm

INPUT SIGNAL

Frequency Horizontal:	30 ~ 83KHz
Frequency Vertical:	50 ~ 76Hz

VIDEO INPUT

Digital Sync:	TMDS - DVI-D
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-5º / 20º

WEIGHT (IMPERIAL)

Net (lbs):	5.5
Net Without Stand (lbs):	4.6
Gross (lbs):	7.7

WEIGHT (METRIC)

Net (kg):	2.5
Net Without Stand (kg):	2.1
Gross (kg):	3.5

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	17.6 x 15 x 5.4
Physical (in.):	14.72 x 15.19 x 7.28
Physical Without Stand (in.):	14.72 x 12.09 x 1.85

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	446 x 382 x 138
Physical (mm):	373.8 x 385.7 x 184.8
Physical Without Stand (mm):	373.8 x 307.1 x 47

GENERAL

Regulations:	RoHS, WEEE, BSMI, CCC, China RoHS, China Energy Label, CECP
PACKAGE CONTENTS:	VA709 x1, 3-pin Plug (IEC C13 / CEE22) x1, VGA Cable (Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market