NO	DESCRIPTION	DATE
⚠1	BACKGROUND FORMAT UPDATED ADD STRIPPING DIMENSION ADD 2 STAMPING DEL PIN CHUCK. (ø2.5), (2) H8 REF. —— 8.0 HEX. ø1 +0.1 −0 —— ø1 +0.05 −0 ø4.5 +0.15 −0.05 —— ø4.5 REF.	12.22.08'

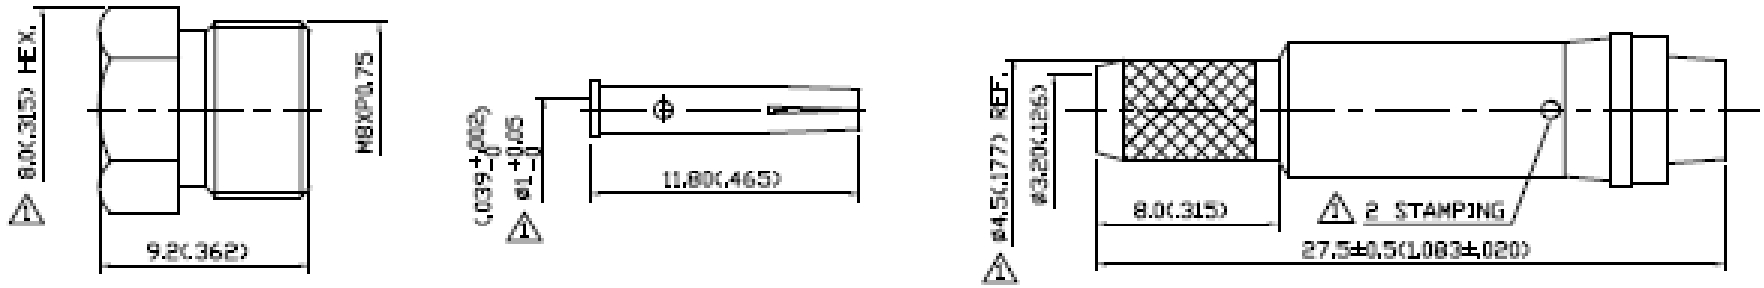

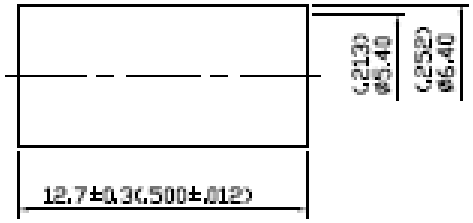

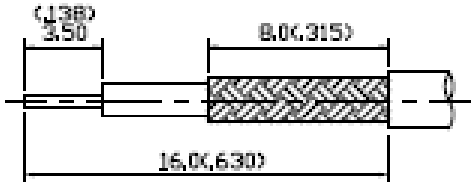

⚠ STRIPPING DIMENSION

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC–900 MHz
1.2 NOMINAL IMPEDANCE: 50 OHM

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS–C3604
2.2 CENTER CONTACT: BRASS PER JIS–C3604
2.3 CRIMP FERRULE: BRASS PER JIS–C2700

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 FOR USE WITH RG58U OR SIMILAR STYLE CABLE
4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP
4.3 CRIMP SIZE REQUIRED: CONTACT: ø0.8MM/1.8(.071) HEX. CRIMP TOOL
FERRULE: 5.5(.215) HEX. CRIMP TOOL

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: −40° C TO +80° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	CRIMP FERRULE	BRASS	1	NICKEL
4	CENTER CONTACT	BRASS	1	GOLD
3	NUT	BRASS	1	NICKEL 100μ" MIN.
2	INSULATION	POM	1	NONE
1	BODY	BRASS	1	NICKEL 100μ" MIN.

APPROVED by _____ DATE: _____

DESCRIPTION	FME STRAIGHT JACK CRIMP								
製圖 DRAWN	Yoko	TOLERANCE		品名 TITLE	23-02-5 D.G.N \ROHS COMPLIANT	58U (50Ω)	日期 DATE	03.10.94'	版次 REV.	A–1
檢圖 CHECK	Monica	.X	±0.2							
		.XX	±0.1	單位 UNIT	mm(In)		DWG.NO.	23–0008		
認定 APPROVAL	Monica	.XXX	±0.05	比例 SCALE	4:1					
		ANGLE	±5°							