




## Datasheet

# RS PRO FULLY-COATED BALL-LOCK STAINLESS STEEL CABLE TIES

RS Stock No. 1834251~1834272 (see below)

EN

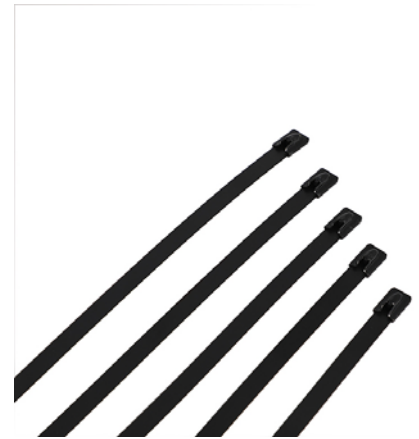

### Technical Information:

**Material:** Stainless Steel Grade 316

316 grade stainless steel, for extra corrosive environments

**Coating:** Polyester

**Working Temp.:** -80°C to +150°C

**Description:** Entirely Black

**Flammability:** Fireproof

**Other Properties:** UV-resistant, Halogen free, non toxic

**Product Feature:** Fully coated version with non-toxic, halogen free polyester coating, preventing static electricity.

Provide additional edge protection.

Prevent the corrosion between dissimilar materials.

**Applications:** Ideal for petrochemical, industries, power stations, mining, ship-building, offshore, and other aggressive environments.

## Specification

RS CODE	EASE CODE	LENGTH		WIDTH		THICKNESS		MAX. BUNDLE DIAMETER		MIN. TENSILE STRENGTH	
		mm	inch	mm	inch	mm	inch	mm	inch	N	lbs
1834251	CT-SS-BL-100/4.6FC	100	3.9	4.6	0.18	0.35	0.014	25	1.00	900	200
1834252	CT-SS-BL125/4.6FC	125	4.9					31	1.23		
1834253	CT-SS-BL-150/4.6FC	150	5.9					37	1.46		
1834254	CT-SS-BL-200/4.6FC	200	7.9					50	1.97		
1834255	CT-SS-BL-360/4.6FC	360	14.2					90	3.55		
1834256	CT-SS-BL-520/4.6FC	520	20.5					130	5.13		
1834257	CT-SS-BL-680/4.6FC	680	26.8					171	6.71		
1834259	CT-SS-BL-840/4.6FC	840	33.1					211	8.29		
1834260	CT-SS-BL-200/7.9FC	200	7.9	7.9	0.31	0.35	0.014	50	1.97	1200	270
1834261	CT-SS-BL-360/7.9FC	360	14.2					90	3.55		
1834262	CT-SS-BL-520/7.9FC	520	20.5					130	5.13		
1834263	CT-SS-BL-680/7.9FC	680	26.8					171	6.71		
1834265	CT-SS-BL-1000/7.9FC	1000	39.4					251	9.87		
1834266	CT-SS-BL-360/12FC	360	14.2	12	0.47	0.45	0.018	90	3.55	2500-2800	555-622
1834267	CT-SS-BL-440/12FC	440	17.3					110	4.34		
1834268	CT-SS-BL-520/12FC	520	20.5					130	5.13		
1834269	CT-SS-BL-1200/12FC	1200	47.2					301	11.85		
1834271	CT-SS-BL-440/16FC	440	17.3	16	0.63	0.45	0.018	110	4.34	2800-3300	622-733
1834272	CT-SS-BL-760/16FC	760	29.9					191	7.50		