


Datasheet





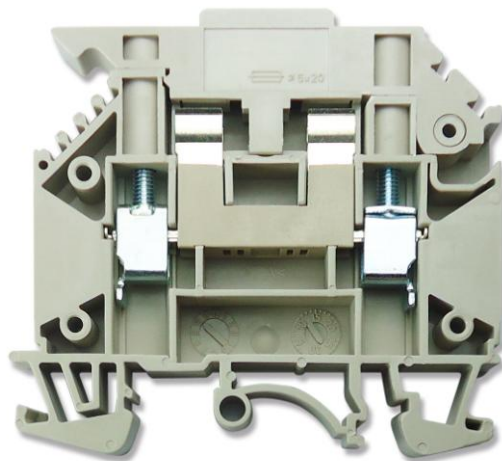


Stock No: 913-1248

Screw Disconnect Fuse Terminal Blocks, 4sq.mm

Screw Clamp Fuse Disconnect Terminal Blocks with a lever action Ø5 x 20 mm fuse carrier, 7.5A, 600V, 22-10 AWG, 0.5-4 sq.mm



Specifications:

Specifications	4mm ²
Technical Data	Rated voltage / Rated current / Wire size
UL	600V / 7.5A / AWG 22-10
CSA	600V / 7.5A / AWG 22-10
IEC	800V / 10A / 0.5-4mm ²
Insulating impulse voltage withstand/pollution degree	6KV / 3
Torque (in -lbs)	7.7
Clamping Screw (M)	M3
Insulation stripping length (mm)	10~12 mm
Net weight per piece	14.5 g
Material / Available Color (Standard Color: Beige)	 Beige 913-1248
Rail Dimensions	T / W / H (mm)
For TS35x7.5 	8 x 60 x 54.3
For TS35x15 	8 x 60 x 61.8
Accessories	Cat. No.
End Bracket 	878-7553
	878-7556
Marking Tags 	913-1282
	913-1318

Dimensions in mm:

