



Benefits

- No external driver required which facilitates easy installation and maintenance
- Delivers uniform light distribution
- IP44 rated diffuser versions for damp locations such as bathrooms and kitchens
- Anti-glare, UGR 19 for eye comfort

Application



Home



Shopping Mall



Retail



Office

Model	Item Description	W	PF	lm	lm/W	CRI	Beam Angle	Life (hrs)	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
F54300RCv1-WH	SIENA SR 8" R200 25.5W 2800K 90D WH	25.5	0.9	2700	106	80	90°	50000	235*235**120	490*490*400	12
F54300RCv1-WH	SIENA SR 8" R200 25.5W 6500K 90D WH	25.5	0.9	2700	106	80	90°	50000	235*235**120	490*490*400	12
LA10020-BK	SIENA 8" SURFACE MOUNT KIT BK	/	/	/	/	/	/	/	/	/	50
LA10020-WH	SIENA 8" SURFACE MOUNT KIT WH	/	/	/	/	/	/	/	/	/	50

Technical Specifications

CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White
IP	IP44
IK	IK02
Driver integrated (Yes/No)	Yes

Electrical Supply

Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties


Optical Material	Reflector
Housing Material	PC

Application Conditions

Operating Temperature	-20°C~40°C
Application Temperature	20°C
Storage Environment	-20°C~40°C

Photometric Data

F54300RCv1

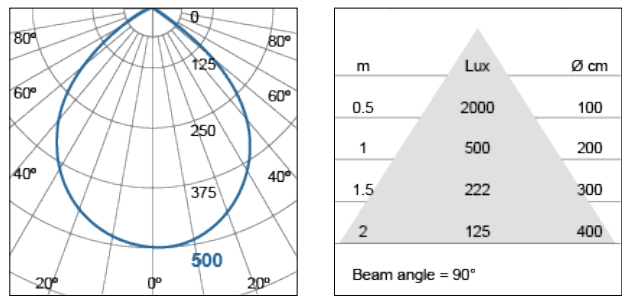

Dimensional Drawing

