


### **FEATURES**

- Connector size is M8
- Space efficient
- IP67

# RS PRO M08 MALE FRONT PANEL MOUNT (FLUSH TYPE) CONNECTOR 6 PIN WITH 500 mm PVC LITZ WIRE

RS Stock No.: 2305711

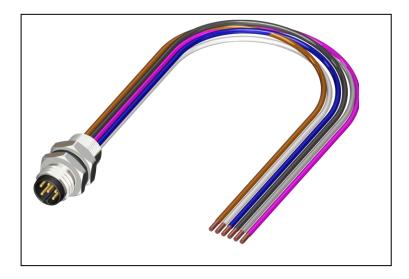

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description ATTRIBUTE 1

#### RS PRO M08 PANEL MOUNT CONNECTOR



#### **M08 Panel Mount**

This panel mount receptacle is available in M8 or M12 and features a threaded connector for secure mating attenuation with corresponding M8 or M12 plugs. When mated, this connection is sealed to IP67, providing excellent protection against dust and water and resulting in a connector that is well suited for industrial purposes.

Panel mount connector is available in contact configurations of 3, 4 & 6 pole and in male and female variants.

#### **Features and Benefits:**

- Connector size is M8
- Insulation Resistance >= 100 M $\Omega$
- IP67

#### **General Specifications**

Rated Operational Voltage	30 V
Current Rating	1.5A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C +75°C
Coding	A-Coded
Coupling	Thread Locking
Shield	No
Mounting	Front (M8 x 0.5)

#### **Material Specifications**

Housing Material	Brass Ni Plated
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
O-Ring	Neoprene
No. of Pole	6
Clamp Nut	M8 x 0.5

#### **Cable Specifications**

Cross Section of Wire	0.14 sq.mm
Termination	Partially Stripped
Wire length	500 mm



Degree of Protection IP67

Additional Information

Custom Tariff Number 85369090

Approvals


IEC 61076-2-104

## Similar Products

Standards Met

Stock No.	Brand	Product Name	Attribute 1	Attribute 2
2017204	RS PRO	RS Pro M08 Male 4 Pin Front Panel Mount Connector	Industrial Automation Cable Assemblies	Actuator/Sensor Cable

## Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

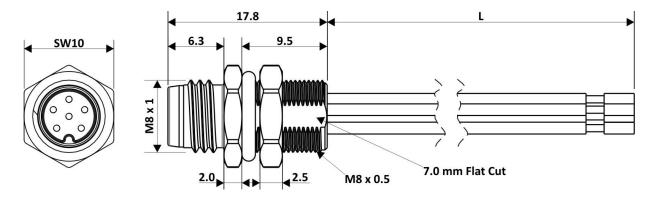

#### All Dimensions are in mm.

