

## Datasheet

# RS PRO NON-INSULATED RING TERMINALS


Stock number: 178-8598

**MAXIMUM ELECTRIC CURRENT:**

|        |    |    |
|--------|----|----|
| A.W.G. | 16 | 14 |
| AMP.   | 18 | 30 |

**TERMINAL MATERIAL:** COPPER

**SURFACE TREATMENT:** TIN PLATED

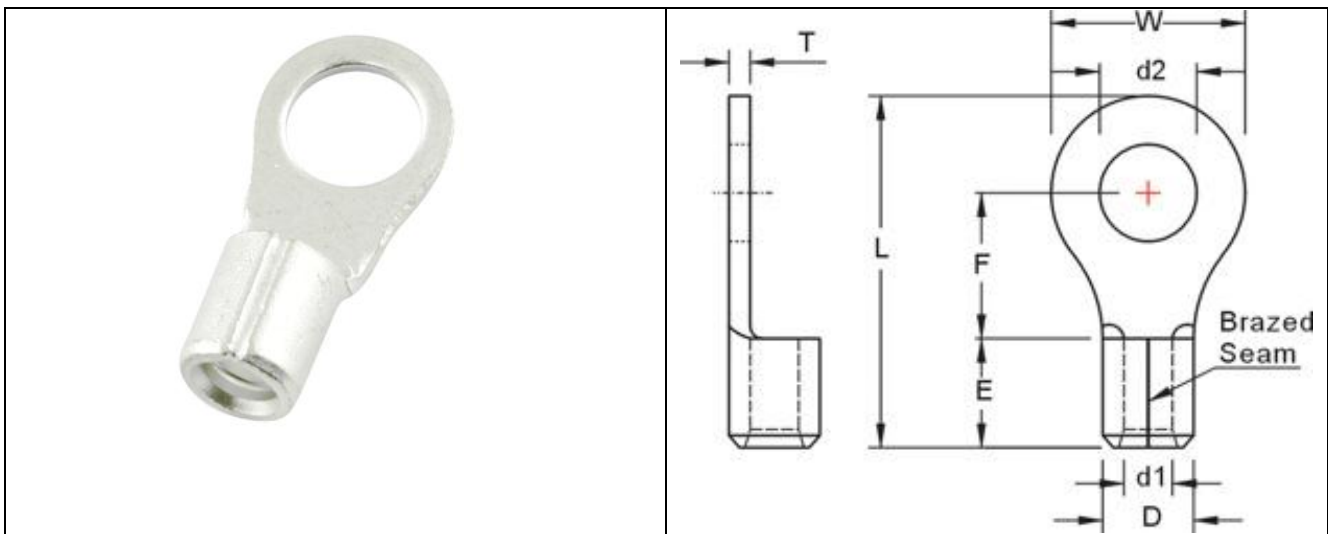

| WIRE RANGE<br>A.W.G.<br>mm <sup>2</sup>       | ITEM NO.<br>BRAZED SEAM           | STUD SIZE<br>2 x d2 | DIMENSION inch(mm) |             |              |               |              |                |              |              |
|---|-----------------------------------|---------------------|--------------------|-------------|--------------|---------------|--------------|----------------|--------------|--------------|
|   |                                   |                     | W                  | F           | L            | E             | D            | d1             | T            |              |
| 16-14<br>A.W.G.<br>1.5-2.5<br>mm <sup>2</sup> | <input type="checkbox"/> 178-8598 | #4                  | 0.126<br>3.2       | 0.26<br>6.6 | 0.189<br>4.8 | 0.504<br>12.8 | 0.189<br>4.8 | 0.161<br>4.100 | 0.091<br>2.3 | 0.031<br>0.8 |