

För icke direkt toleranssatta mått gäller toleransklass  
General tolerances if not otherwise stated

NOM DIM MM		TOL CLASS		
From	To	A	B	C
(1)	6	±0.05	±0.1	±0.2
(6)	30	±0.1	±0.2	±0.5
(30)	100	±0.15	±0.3	±0.8
(100)	300	±0.2	±0.5	±1.2
(300)	1000	±0.3	±0.8	±2

Hål / Holes H13

Skarpa kanter brutna där ej annat anges.  
No sharp edges unless otherwise specified.

Övriga generella toleranser enligt ritning 4100-4644.  
Additional general tolerances in accordance with drawing 4100-4644.

Denna ritning är Pressmaster AB:s egendom. Skyddad av gällande lag.  
This drawing is the property of Pressmaster AB. Protected in accordance with prevailing law.



Rev	Change order	Change: A = Added W = Was D = Deleted	Date	Sign
6	1020885000	4100-3792 W 4100-5164	040923	SE
7	1024421000	D 4100-3004	051013	SE
8	P2716	4100-3851 W 4101-3332 447-459 W RS 447-459	091102	SE

LASERMÄRKNING/LASER MARKING:

FONT: GEN-ISO

Datumkod / Date code "YYYYYY"

Serienummer / Serial number "XXXXXXX"

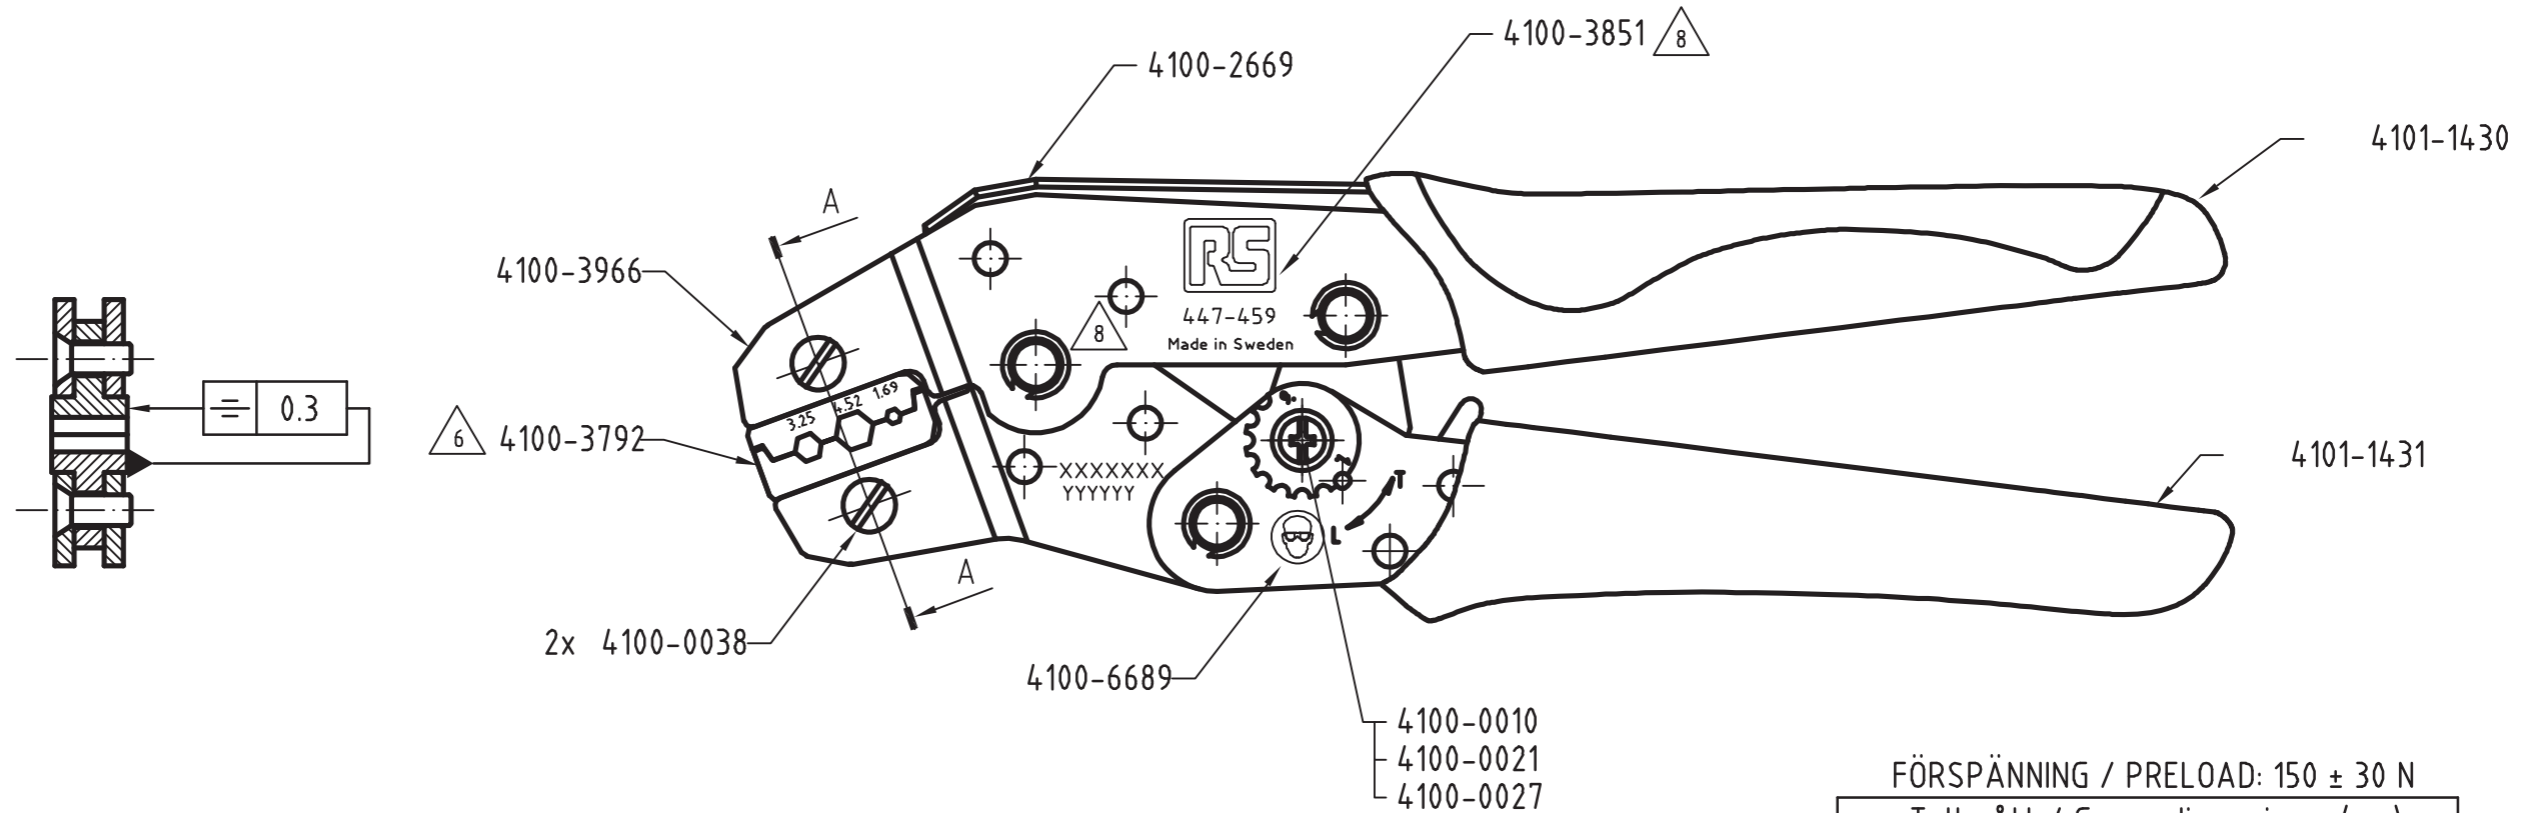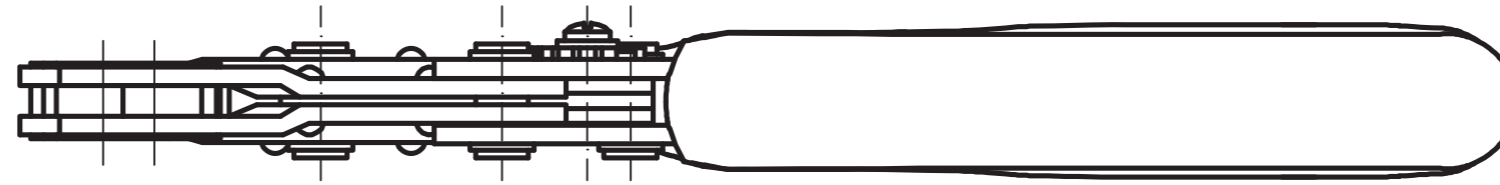

FÖRSPÄNNING / PRELOAD: 150 ± 30 N

Tolkmått / Gauge dimensions (mm)

URTAG NEST	Gåtolk GO	Stopptolk NO GO
HEX 3.25	∅3.20	∅3.30
HEX 4.52	∅4.47	∅4.57
HEX 1.69	∅1.66	∅1.72

Packas enligt förpackningsritning 4101-2723  
Packed according to drawing 4101-2723

4101-2611  
4100-3776  
4100-5183 - placering position B  
4101-2615

Material		Behandling/Treatment			Status	
Konstr/Design AM	Ritad/Drawn TGW	Datum/Date 2009-11-02	Skala/Scale 1:1	Kontr/Checked MAHA	Godk/Approved NE	Frisläppt
Benämning/Denomination <b>KRIMPTÅNG 447-459</b> <b>CRIMPING TOOL RS</b>				Vikt/Veigt,gram	Art grp 012	
ISO 9001 REG NR FM19487				Ritn nr/Drawing no <b>43001230</b>	REV <b>008</b>	