


FEATURES

- Cable protection
- Slotted construction
- Significantly lower fire risk, due to self-extinguishing nature
- Slot gaps are 8mm

RS PRO Grey Slotted Panel Trunking - Open Slot, W25 mm x D60mm, L2m, PVC

RS Stock No.: 758-9276

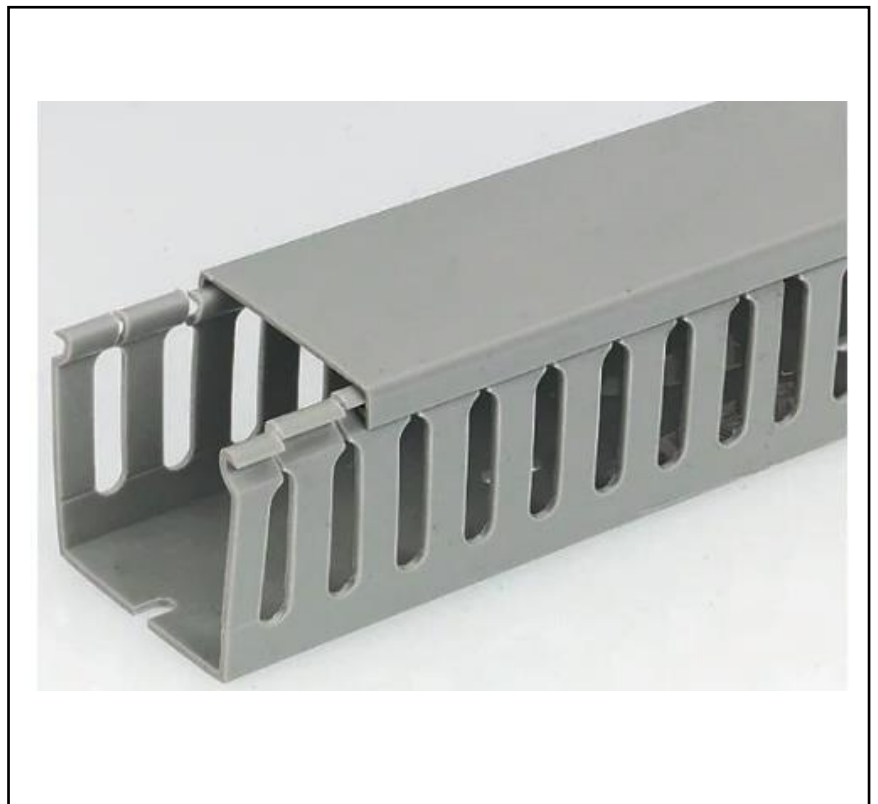

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

Brought to you by RS Pro, this open slot PVC cable trunking is versatile and cost effective. Used in any application where cable protection is essential, this cable trunking has flexible slots to allow easy slide-on and slide-off of the cable cover. The open slot construction also allows for cables to be threaded into and out of the trunking at any point. The trunking is made from high impact, warp proof PVC, and is self-extinguishing to UL94-V2. This means the trunking is suitable for commercial applications, with an emphasis on safety and long-life. Whether you are running cable from switchboards for IT applications, or power and network leads for a busy office or factory floor, this cable trunking is ideal. All models are highly reliable and excellent quality.

General Specifications

Trunking/Chain Type	Slotted Panel Trunking
Material	PVC
Colour	Grey
Fire Behaviour	Self-extinguishing
Applications	Offices and indoor work spaces, at various lengths, Electrical workshops, Schools, Hospitals, Hotels and anywhere with customers walking amongst cables

Mechanical Specifications


Length	2m
Width	25mm
Depth	60mm
Slot Type	Open
Slot Gap	8mm

Operation Environment Specifications

Operating Temperature Range	Up to 50°C
Maximum Service Temperature	85°C

Approvals

Standards Met	CE, CSA, RoHS Compliant, UL 94 V-0, UL 94 V-2, UL E97527
----------------------	--

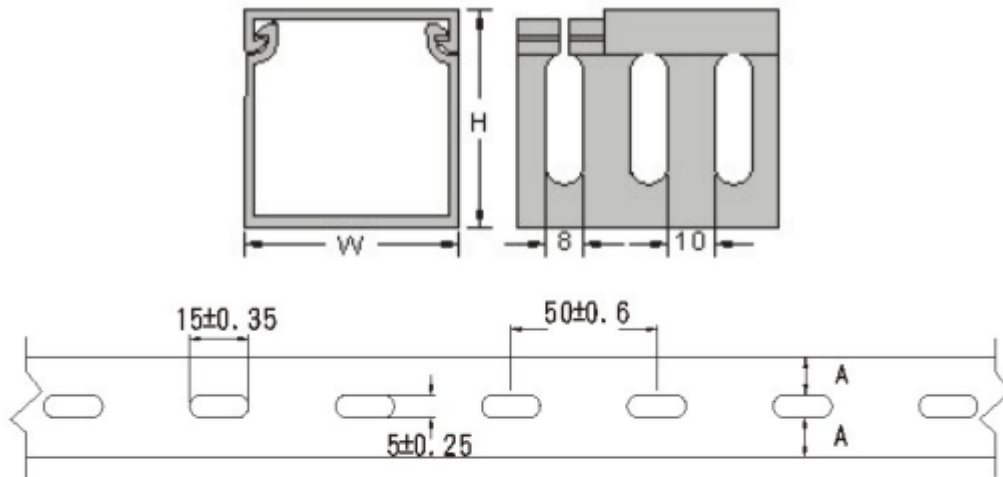

RS Article No	W(mm)	H(mm)	A	Slot	Length
758-9279	25	30	10	8mm	2M
758-9272	25	40	10		
758-9276	25	60	10		
758-9285	25	80	10		
758-9288	40	40	17.5		
758-9282	40	60	17.5		
758-9291	40	80	17.5		
758-9294	60	40	27.5		
758-9298	60	60	27.5		
758-9308	60	80	27.5		
758-9301	60	100	27.5		

