




RS Stock No.517-4213  
 RS Stock No.517-4207  
 RS Stock No.517-4229  
 RS Stock No.517-4235

# IP65 Coated Grey Aluminum boxes (with seal ,coated Grey)

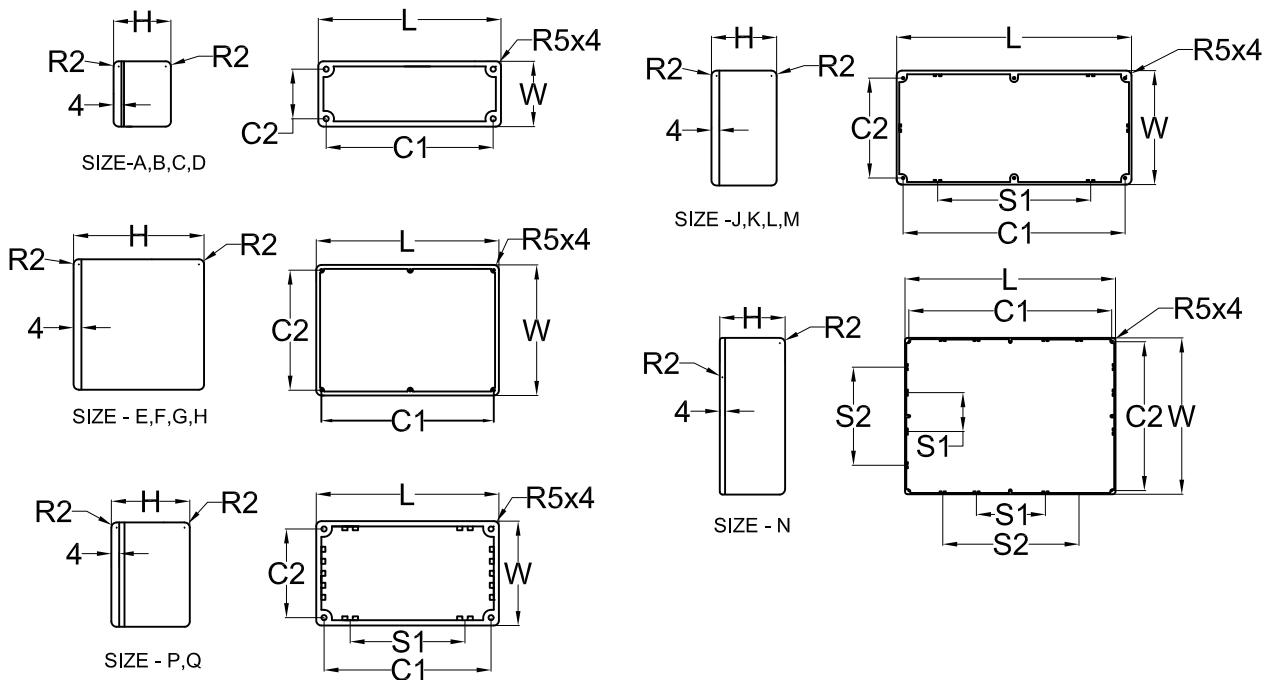

RS Stock NO.	Size NO.	L	W	H	C1	C2	S1	S2	Wall Thickness
5174213	A	89.5	35.4	31.3	79.3	25.3			1.5mm
5174207	B	114.9	64.0	31.3	104.5	54.2			1.5mm
5174229	C	115.1	90.1	56.1	104.4	79.6			1.5mm
5174235	E	172.4	121.3	56.4	160.4	109.3			2.0mm
	L	166.2	127.7	77.7	154.0	116.1	77.1		2.0mm
	N	250.6	250.6	101.9	238.0	238.0	79.9	160.0	2.5mm

1. Material of the base and lid :Aluminium alloy ,ADC12
2. Material of the screws: Stainless M3.5x12mm Supadrive countersunk head
3. Seal:3mm thick black self-adhesive synthetic rubber , Neoprene providing protection to IP65
4. Finish:Powder coating
  - 4-1. Thickness:75~150 Micron inch (1.9um~3.8um )
  - 4-2. Color:Grey RAL 7038
  - 4-3. Temperature resistance:
    - a. Max continuous working temp. 120 deg C.
    - b. Max short peak working temp. 150 deg C.
    - c. Melting temp. 180 deg C.
5. Taper 1.5° Per side to base