


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	01.06.03'
②	BACKGROUND FORMAT UPDATED	02.09.09'

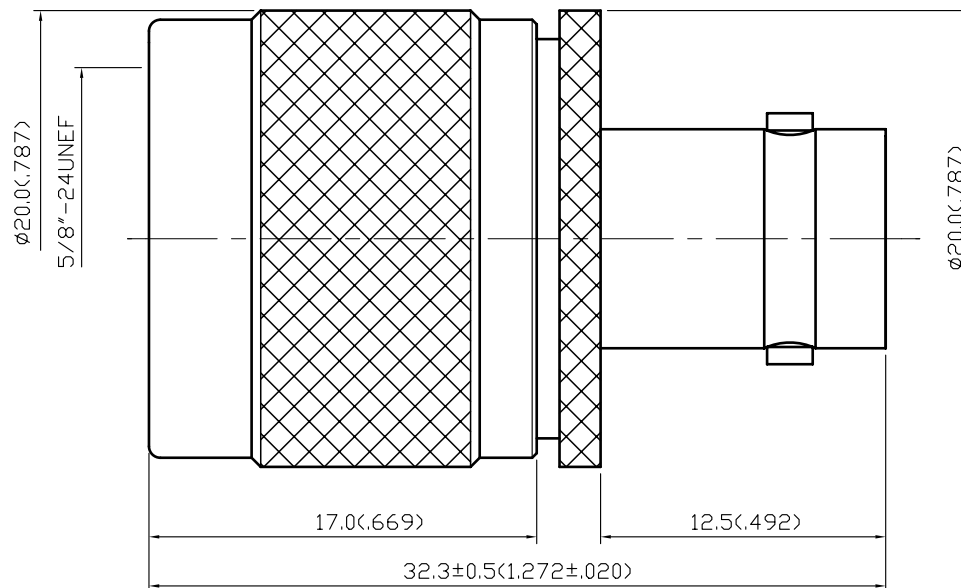

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1500 VOLTS

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	INSULATION	TEFLON	1	NONE
7	CENTER CONTACT	BRASS	1	GOLD
6	INSULATION	TEFLON	1	NONE
5	WASHER	BRASS	1	NONE
4	BODY	BRASS	1	SILVER 70 μ" MIN.
3	GASKET	SILICONE	1	RED
2	CHASSIS	BRASS	1	SILVER 70 μ" MIN.
1	SHELL	BRASS	1	SILVER 70 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED

by

DATE:



DESCRIPTION		N PLUG-BNC JACK		DATE		REV.	
製圖	DRAWN	TOLERANCE	品名	11-32	T.G.S	日期	10.15.92'
	Yoko	.X ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		版次	A-2
檢圖	CHECK	.XX ±0.1	單位	DWG.NO. 11-0104		SCALE	
	Monica	.XXX ±0.05	mm(in)			比例	4:1
認定	APPROVAL	ANGLE ±5°	比				
	Monica		例				