


NO	DESCRIPTION	DATE
⚠	BACKGROUND FORMAT UPDATED	04.27.09

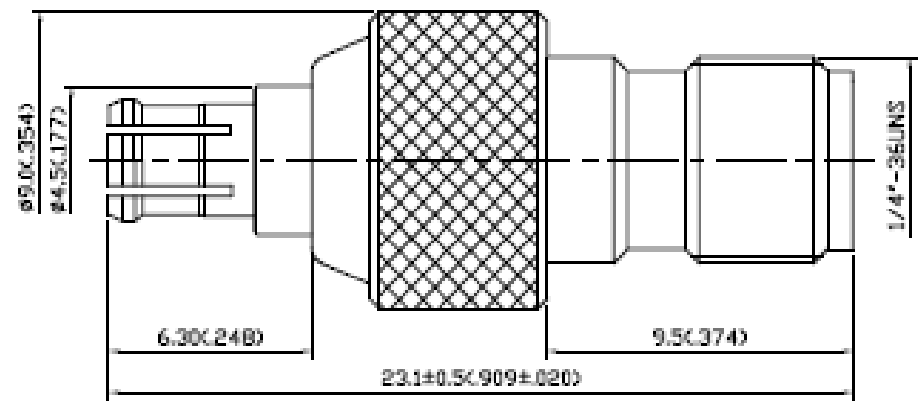

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-6 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 WORKING VOLTAGE: 330 VOLTS MAX
- 1.4 PROOF VOLTAGE: 1000 VOLTS
- 1.5 VSWR: 1.5 MAX

2.0 MATERIALS

- 2.1 BODY: BRASS PER JIS-C3604
- BERYLLIUM COPPER PER ASTM B196 UNS C17500
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17500
- 2.3 INSULATION: TEFLON PER ASTM D1487 AND ASTM D6710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: CEC028290

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -55° C TO +155° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	INSULATION	TEFLON	1	NONE
4	BODY	BRASS	1	GOLD 3μ" MIN.
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 50μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	CHASSIS	BERYLLIUM COPPER	1	GOLD 3μ" MIN.



APPROVED by _____ DATE: _____

DESCRIPTION		MCX PLUG TO SMA JACK		品名		27-26 T.G.G		日	DATE	版	REV.
製	DRAWN	TOLERANCE		TITLE		\ROHS COMPLIANT (500)		期	05.08.03	次	A-1
圖	Yoko	X	±0.2	DWG.NO.		27-0049					
檢	CHECK	XX	±0.1	單	UNIT						
圖	Jacky	XXX	±0.05	位	mm(in)						
認	APPROVAL	ANGLE	±5°	比	SCALE						
定	Lewis			例	4:1						