


# Datasheet

## Fibre Optic Cable Assembly

RS Stock number 536-7386



### Dimensions: (mm)

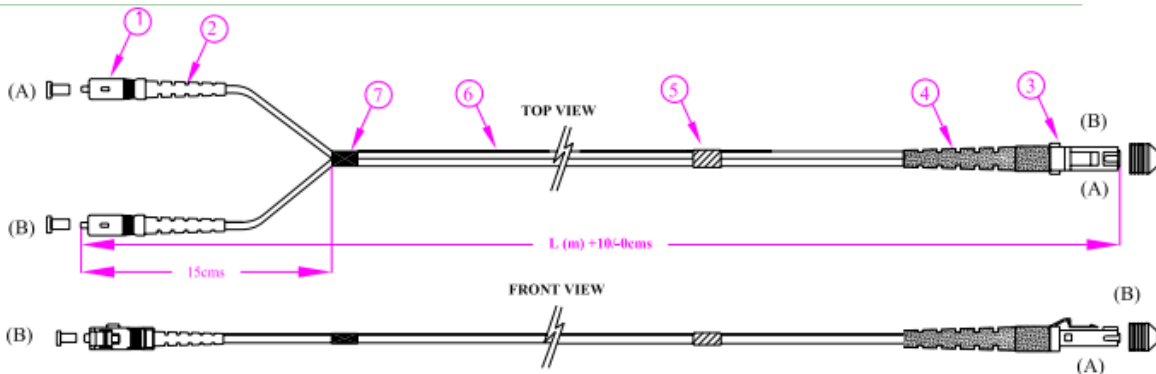

| Id No. | Description          | EA |
|--------|----------------------|----|
| 1      | SC Connector         | 2  |
| 2      | SC Boots             | 2  |
| 3      | MTJR Connector       | 1  |
| 4      | MTJR Boot            | 1  |
| 5      | Identification Label | 1  |
| 6      | 1.6mm Duplex Cable   | 1  |
| 7      | Black Tape           | 1  |

### Optical Performance (IEC 61300-3-4):

#### Multimode (@ 1300nm)

MTRJ: Max. IL - 0.50dB Typical: 0.30dB

SC : Max. IL - 0.30dB Typical: 0.20dB

#### Singlemode (@1310nm and/or 1550nm)

MTRJ: Max. IL - 0.50dB Typical: 0.30dB

SC : Max. IL - 0.30dB Typical: 0.20dB

Return Loss: >40dB

Return Loss: >50dB

- RoHS compliant
- Coiling Diameter of the Patchcord shall be greater than 200mm.