

FEATURES

- Material: UL approved Nylon 66, flammability rating 94V-2.
- Color: Black
- Application: double head design to secure wires, tubing or hoses parallelly separated.
- Feature: two way insertion head design to facilitate fast wire, hoses, tubing bundling from either direction.

RS PRO

Double Loop Mounting Tie

RS Stock No.: 2133018



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

- Material: UL approved Nylon 66, flammability rating 94V-2.
- Color: Black
- Application: double head design to secure wires, tubing or hoses parallelly separated.
- Feature: two way insertion head design to facilitate fast wire, hoses, tubing bundling from either direction.

General Specifications

Series	Double Loop Mounting Tie
Type	Non-Releasable
Colour	Black
Material	Nylon 66, 94V2
Finish	
Application	Double head design to secure wires
Resistant To	
UV Resistant	No
Minimum Operating Temperature	-40°C
Maximum Operating Temperature	85°C
Fire Behaviour	Self-Extinguishing
Quantity	50

Mechanical Specifications

Length	L : 500mm / L1 : 250mm
Width	12.7mm
Tensile Strength	114KGS(250LBS)
Maximum Bundle Strength	60mm
Thickness	2.2±0.25mm
Mounting Hole Dia.	6.2mm

Protection Category

IP Rating

Classification

eCl@ss (10.0.1)

UNSPSC (6.01)



Approvals

Declarations

Standards Met

Similar Products

Stock No.	Brand	Product Name	Colour	Material	Tensile strength

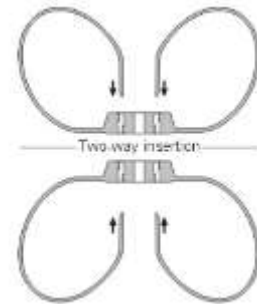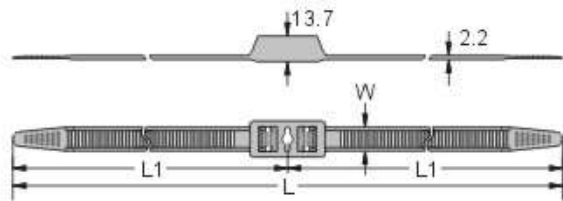

Unit: mm

KSS Item No.	L		L1		Width W	Mounting Hole Dia.	Max. Bundle Dia.	Min Loop Tensile Strength		Packing
	mm	inch	mm	inch				Lbs	Kgs	
DMT-500XLBK	500	19 11/16"	250	10"	12.7	6.2	60	250	114	50pcs/Bag