


Datasheet

RS Pro Vinyl-Insulated Double Crimp Female Disconnectors

Stock Number: 125-1946

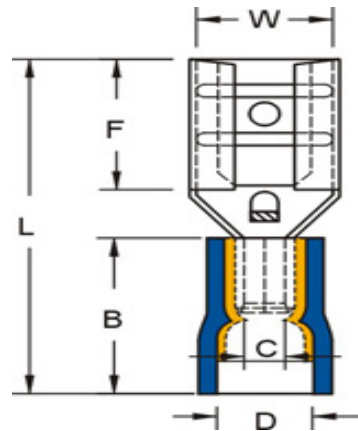

WIRE RANGE A.W.G. / mm ²	ITEM NO.	NEMA TAB	DIMENSION inch(mm)						Q'TY BOX
			W	F	L	B	D	T	
22-16 A.W.G.	FDD1-250	.032X.250	0.26	0.295	0.819	0.413	0.157	0.016	1000
0.5-1.5 mm ²		(0.8X6.35)	6.6	7.5	20.8	10.5	4	0.4	

Maximum Electric Current:

A.W.G.	22	20	18	16
AMP.	3	4	7	10

Maximum Electrical Rating: 105°C 600 V Max

Insulation Material: Vinyl

Terminal Material: Brass

Insulation Colour: 22 – 16 AWG (Red)

Double Crimp: With copper sleeve on barrel

Terminal Barrel ID: 22 – 16 AWG C = 1.7 mm