


Datasheet

DPDT Slide Switch

RS Stock number 734-7274

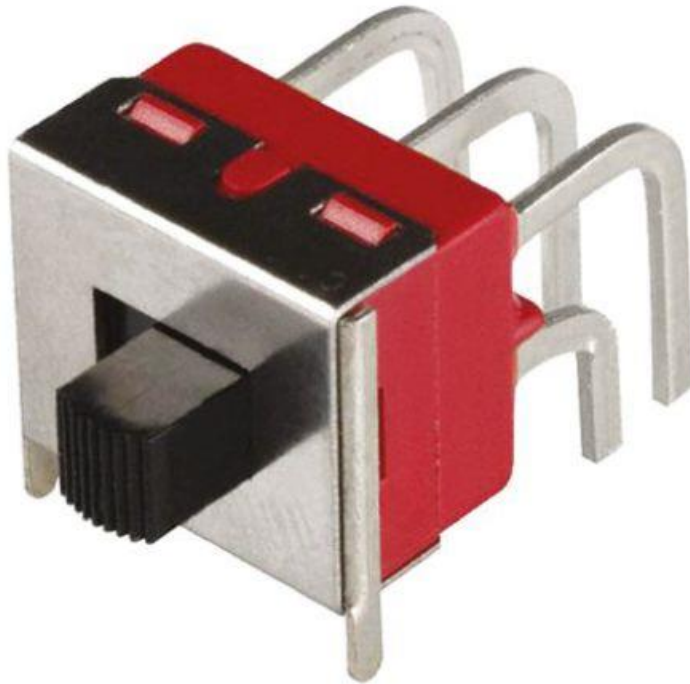

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 10m Ω max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000M Ω min.

DIELECTRIC STRENGTH: 1,000 V RMS@sea level.

OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).

ACTUATOR: Nylon, black std.

HOUSING: Stainless Steel.

CONTACT: Silver or gold plated.

TERMINAL SEAL: Epoxy.

ROHS: 2002/95/EC


RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)

Q : 2Amps @250VAC

5Amps @120 VAC or 28 VDC

**Dimensions – inch
mm**

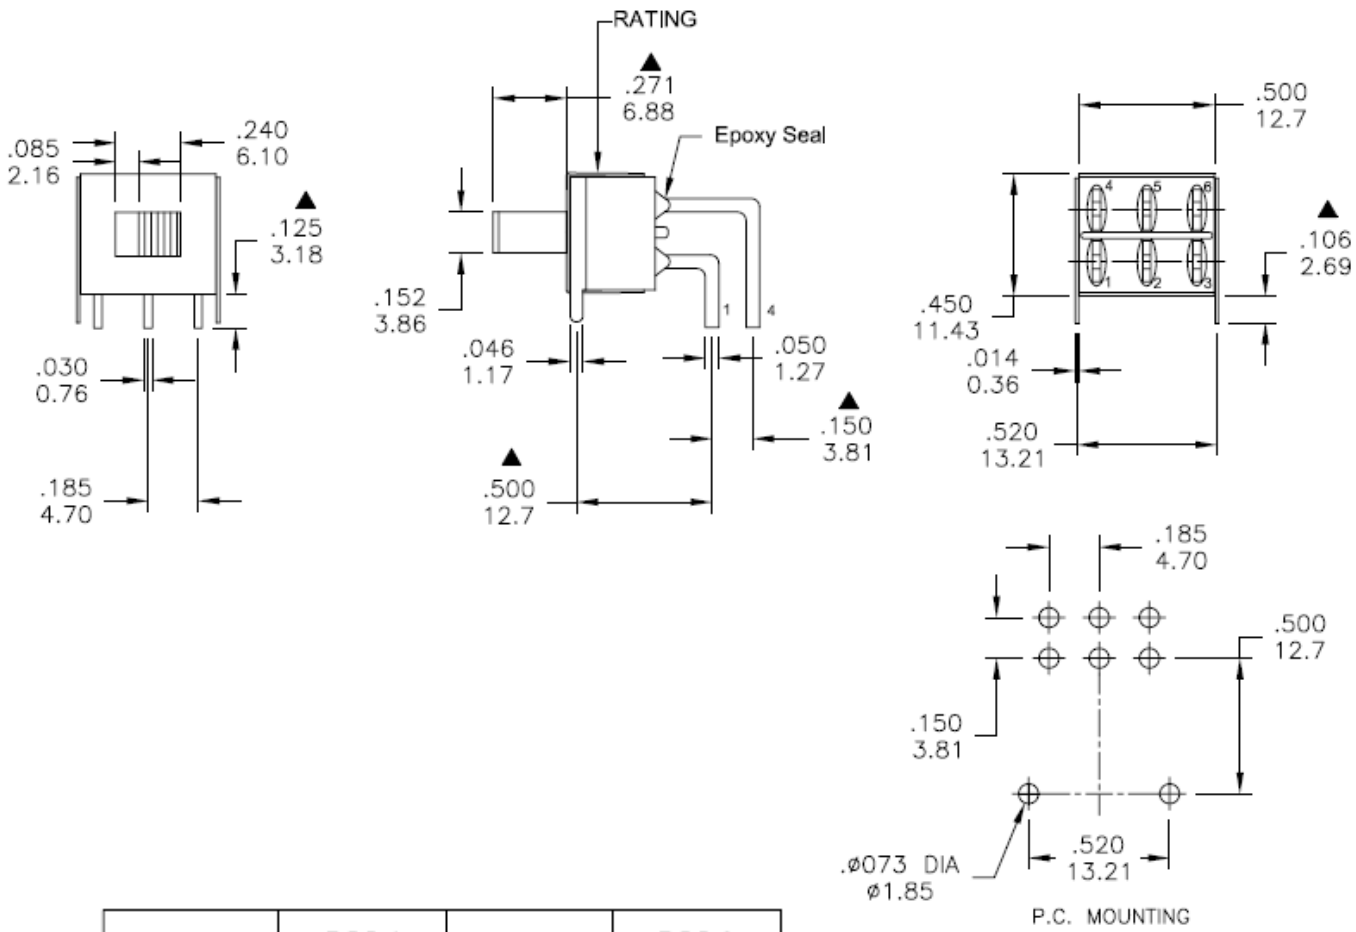

| Model No. | POS.1 | | POS.3 |
|-------------|---------|------|---------|
| | 5MD1 | ON | |
| Term. Comm. | 2-1,5-4 | | 2-3,5-6 |
| SCHMATIC | | OPEN | |

SWITCH FUNCTION