
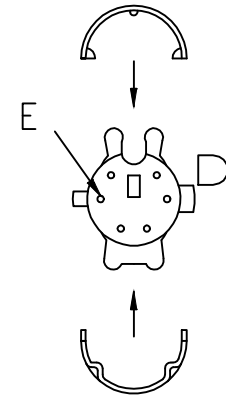
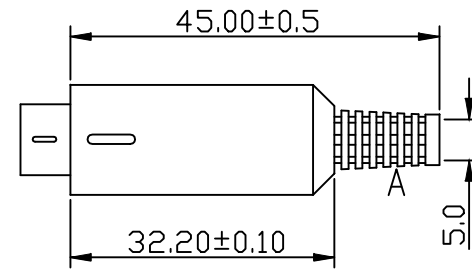



GTT P/N	MDP3SA	MDP4SA	MDP5SA	MDP6SA	MDP7SA	MDP8SA
RS P/N	463-366	463-372		463-388		463-394
NO of pins	3	4	5	6	7	8

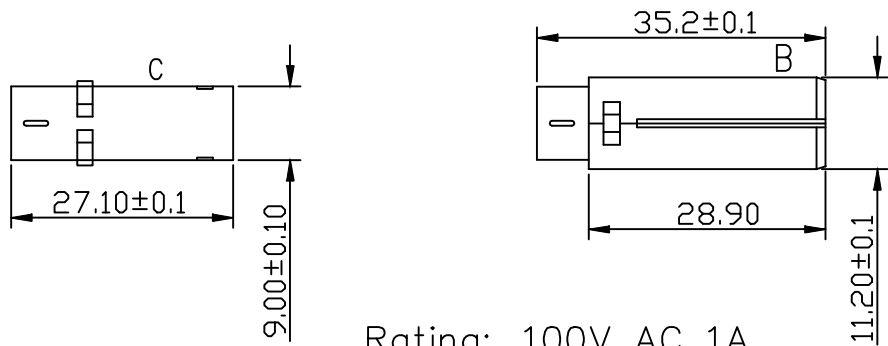


Rating: 100V AC 1A
 Insulation
 Resistance: 50Mohm/500V DC
 Dielectric: 500V AC/1minute

REACH
 RoHS

Materials:
 A.BOOT: PVC
 B.MIDDLE HOOD: ABS
 C.METAL PART: COPPER,
 NICKEL PLATED
 D.INSULATOR: PC
 E.PIN CONTACT: COPPER,SILVER

UNLESS OTHERWISE SPECIFIED TOLERANCE :				TITLE: MDP8SA		G00350	
X.X ±0.3	ANGLES : ±2°						
X.XX ±0.15	DO NOT SCALE DRAWING	DRAWN BY: Bonnie		PART NO. 463-394		REV. D	
CHECKED BY: Eric		SIZE A4	UNIT mm	THIRD ANGLE PROJECTION		PAGE 1 OF 2	
APPROVED BY: Mark		SCALE NA	DATE 2018-10-19		ITEM NO. 463-394		
DWG NO. -		TOOLING NO. -		DATE 2018-10-19		REV. D	

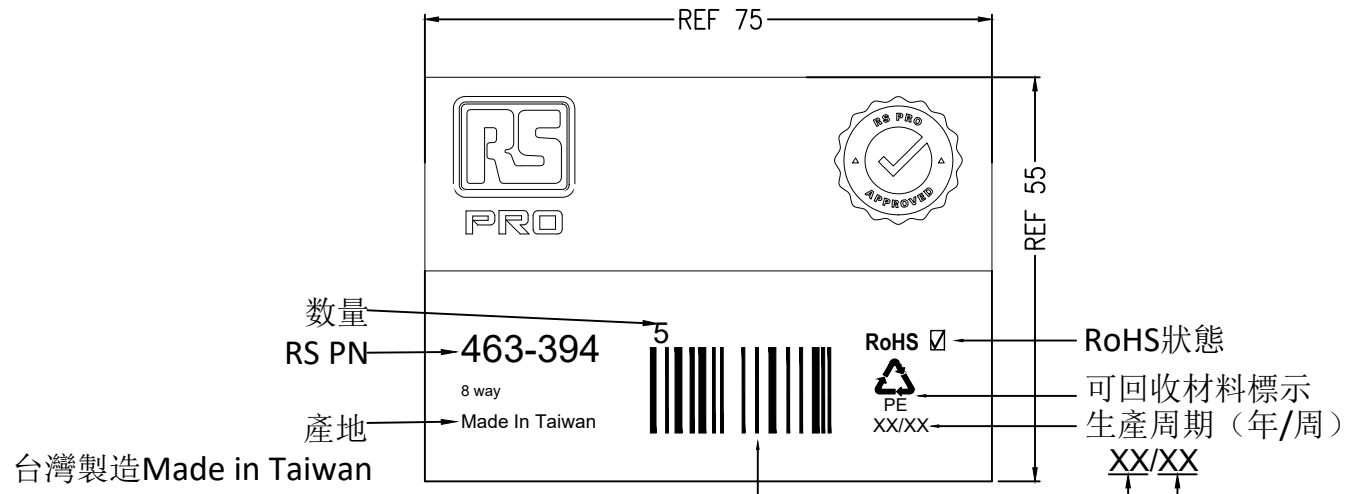

條碼內容: 463394
 RS PN: 料號中的“-”不可輸入 (Code 128)

REACH
 RoHS

UNLESS OTHERWISE SPECIFIED TOLERANCE :				TITLE MDP8SA		G00350	
ANGLES : ±2°							
X.X ±0.3		DRAWN BY Bonnie		PART NO. 463-394		REV. D	
X.XX ±0.15 DO NOT SCALE DRAWING		CHECKED BY Eric		UNIT mm		SCALE NA	
APPROVED BY Mark		DWG NO. -		THIRD ANGLE PROJECTION		PAGE 2 OF 2	
TOOLING NO. -		ITEM NO. 463-394		DATE 2018-10-19			