

Industrial Weighing

2022/23



- Scale Indicators
- Software and Services
- Compact and Special Scales
- Weights and Accessories
- Weigh Modules and Load Cells
- Vehicle Scales
- Weighing Platforms
- Parcel and Pallet Weighing
- Dimensioning and Scanning




Solutions to Maximize Yield

Compliant Weighing and Measuring

METTLER TOLEDO

Providing Solutions Across Our Customers' Value Chains

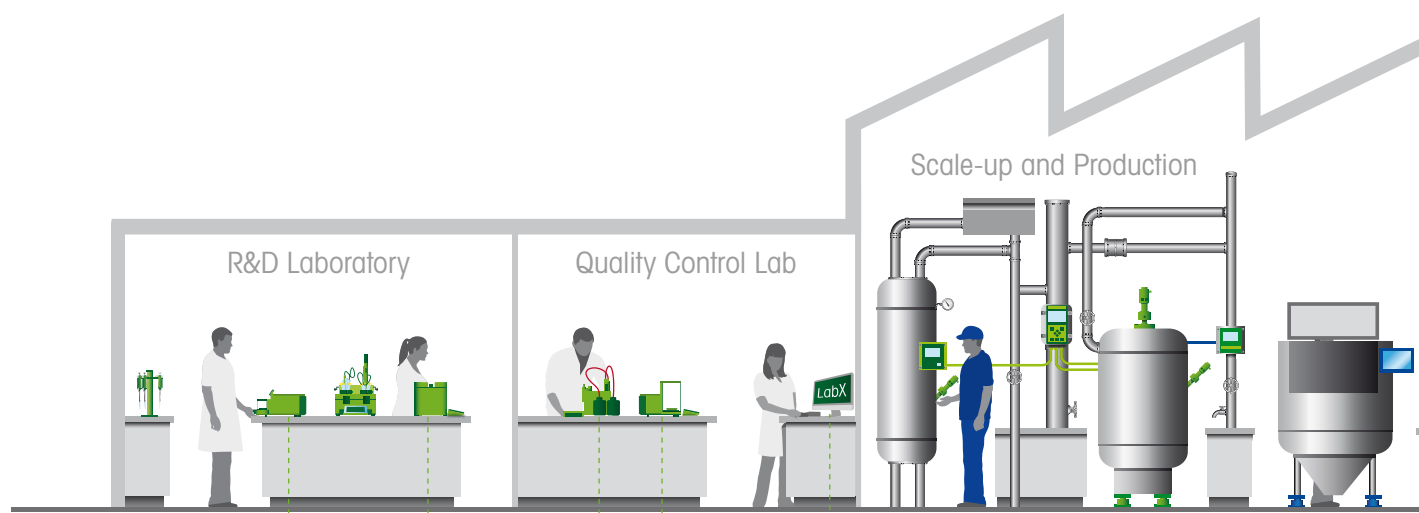

R&D Laboratory

Our precise instruments are the foundation of research and quality control labs all over the world. High-performance weighing solutions offer a basis for solid R&D results. Pipettes are an essential tool for life science research. Thermal analysis instruments help to improve materials and their thermal behavior. Automated chemistry solutions accelerate the development of new chemicals.

Quality Control Lab

Quality control relies on fast and precise analytical measurement as well as good data management. Our analytical balances, titrators, pH meters, density meters, refractometers, melting point meters, pipettes, and UV/VIS spectrophotometers can be tailored to each customer's application and provide a fully documented workflow for every quality control lab.


Scale-Up and Production

Our sensors for measuring critical liquid analytical parameters, such as pH and oxygen levels and water conductivity and resistivity as well as total organic carbon, enable pharmaceutical, biotech, and other companies to continuously ensure product quality and meet regulatory standards. Our transmitters and connectivity solutions make data collection and integration into control systems efficient and flexible.



Explore Our Weighing Solutions For the Industrial Environment

Flip to page 8 ►►►

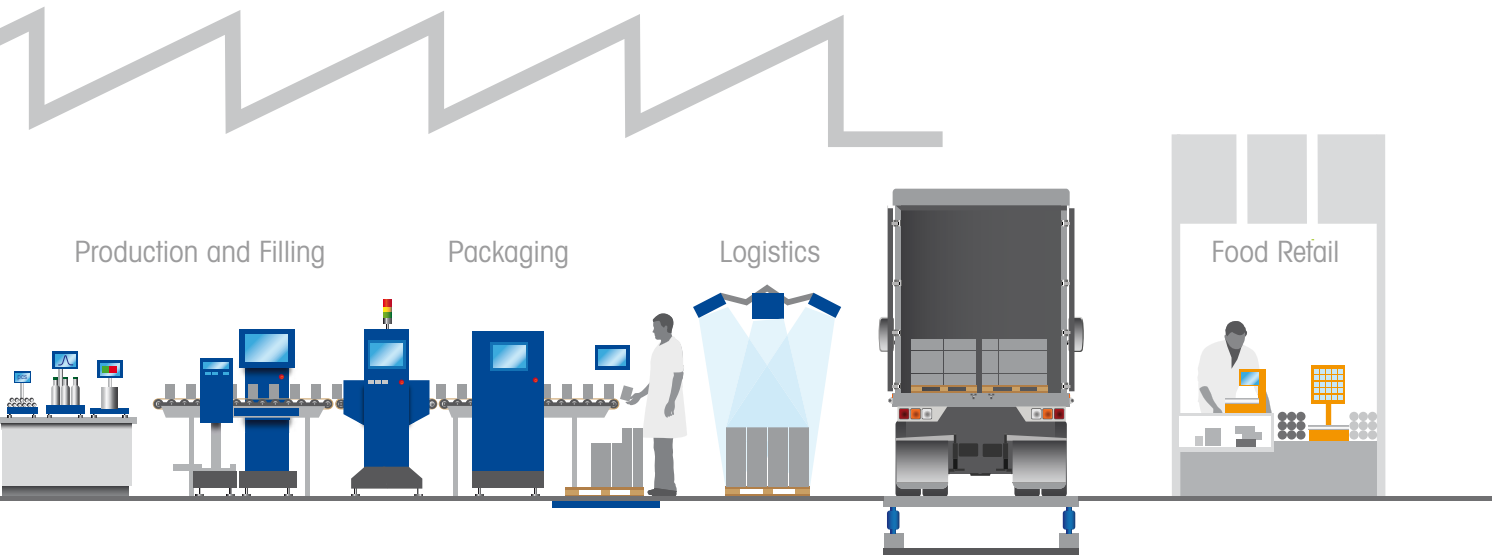

Production and Filling

We offer highly robust and durable industrial scales and scale indicators in all sizes, formats, and capabilities to monitor and control various manufacturing processes including applications for counting, formulation, and weight-based quality control. Software programs help increase productivity, improve product quality, and enhance the yield of manufacturing processes.

Packaging

Product inspection solutions help to safeguard product quality, safety, and integrity, inside and out. Our systems for metal detection, check-weighing, x-ray, and vision inspection provide confidence that product quality is maintained, compliance with industry standards is achieved, and consumers and brands are protected.

Logistics

Our vehicle scale systems offer the highest level of accuracy and can prevent unexpected downtime thanks to the unique design and remote diagnostic capabilities. For express and freight carriers, in-motion weighing and dimensioning solutions provide revenue recovery opportunities at the highest throughputs and read rates.

Food Retail

From retailers' receiving docks to their checkout counters, we enhance efficient handling of fresh goods with weighing, packaging, pricing, wrapping, and labeling solutions. Connected scales greatly facilitate in-store marketing, fresh item management, promotions, and more.

Check our solutions:

► www.mt.com



Find Your Solution

Maximize Your Yield



What Do We Mean When We Say, “Maximize Your Yield?”

No matter what you manufacture, formulate or fill, your goal is to get the most out of your production processes while still delivering quality to your customers.

Accurate weighing helps – but we deliver more than just weighing equipment. We offer total system solutions with value-added features that help boost your productivity, ensure product quality, enable high uptime, and more.

Discover your ideal solutions:

► www.mt.com/Industrial

“ Since partnering with METTLER TOLEDO, we have seen an increase in our yield, which has led to a boost in our operating profits. ”

Production Manager, Manufacturing Plant



6 Key Factors That Enhance Yield – Get the Most Out of Your Process



Increase Productivity

Enable efficiency in production, whether manual or automatic, and ensure every step has a purpose.



Ensure Quality

Eliminate bad batches and waste by ensuring high quality is achieved every time.



Maximize Uptime

Boost equipment uptime with solutions that don't fail and actively alert to maintenance needs.



Enhance Visibility

End-to-end connected weighing solutions offer visibility for informed decision-making and traceable results.



Achieve Accuracy

Reduce giveaway, ensure quality, and maintain process insights with truly accurate solutions.



Guarantee Compliance

Right-the-first-time processes and proper documentation help you to ensure regulatory compliance.

Maximize Machine Performance Simplify Your Job

What Do We Mean When We Say, “Simplify Your Job?”

For multinational companies or machine builders serving customers worldwide, we offer global and local partnership, no matter where you do business.

Our comprehensive consulting and extensive weighing portfolio are available to help you simplify your job. Globally approved weighing devices enable you to standardize your weighing solutions and deliver a reliable value to your customers or production facilities around the world.

Discover your ideal solutions:

► www.mt.com/Industrial

“ Our engineers, service technicians and sales team are all seeing benefits from the METTLER TOLEDO solutions. ”

Project Managers, EPC Company



5 Ways We Can Simplify Your Job – Optimize Resources on Every Project




Parcel Dimensioning

TLD250 Static Dimensioning System

Leverage camera-based measurement technology to automatically dimension parcels and packages.

Page 262

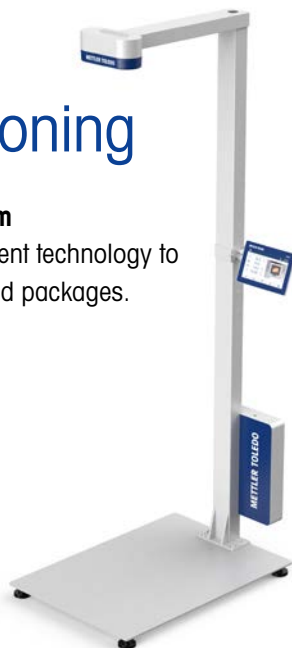

Page 54

IIoT Edge Device

ACI400 IIoT Edge Gateway Device

Connect new and existing scales to OPC UA and MQTT networks.

Scale Indicators

IND360 Compact Automation Scale Indicator

Ultra-fast, modular scale indicator designed to boost automated weighing processes and productivity.



Page 48

Tank Scale Calibration

RapidCal™

Simplify the tank scale calibration process, reduce downtime and eliminate contamination risk.

Page 284




Pallet Weighing

PJA Pallet Truck Scales

Fully customizable mobile weighing solution for maximum process efficiency.

Page 164



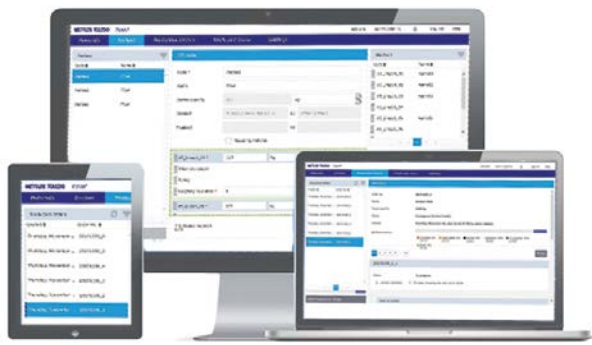

Page 62

Software

Form⁺

This Formulation and Recipe Management System helps to get the most out of your product manufacturing processes.

Bench Platforms

PBD659 Hygienic Bench Scale Platform

Streamline cleaning and ensure compliance with an optimized hygienic platform design.



Page 74

A Choice of New Products For Industrial Applications



Page 178

Inventory Management

SmartShelf Weighing Pads

Integrate weighing sensors directly into shelves or racks to check stock and analyze usage trends for easy supply-chain optimization.



Page 90

Hazardous Area Weighing


ICS4_6x Compact Scales

Intrinsically safe, ergonomically designed bench scales that deliver precision and safety.

Competence for Safe Manufacturing Solutions for Hazardous Areas

Explosive areas require special considerations, but performance doesn't need to be compromised. Our complete range of solutions for weighing in hazardous areas helps optimize operations, accelerate processes, improve product quality and comply easily with the latest regulations.


► www.mt.com/hazardous

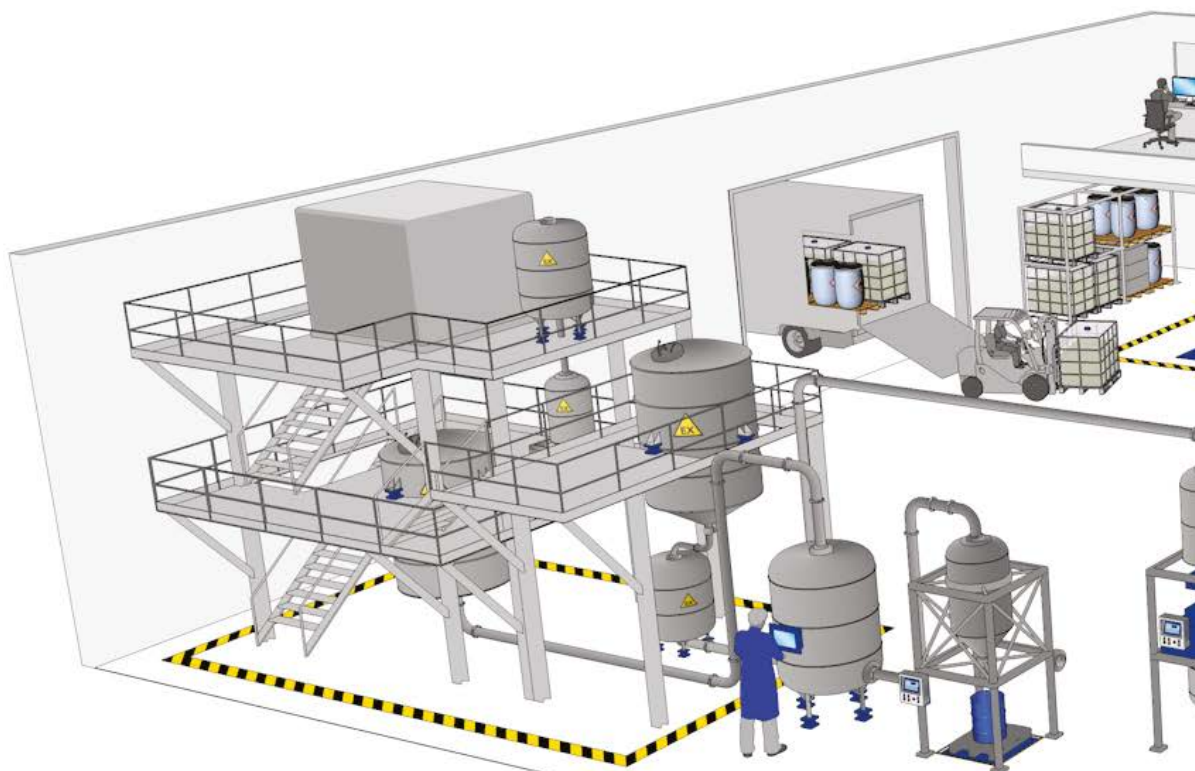

Our Solutions for Hazardous Areas


METTLER TOLEDO develops weighing equipment for use in hazardous areas that combines excellent safety with uncompromised weighing performance. Our broad portfolio of hazardous area weighing equipment comply with the latest IECEx, ATEX and US/CAN standards, as well as many local standards typically for Zone 1/21, Division 1 and Zone 2/22, Division 2 areas. Solutions for Hazardous Areas are in the following categories:

- Weighing Modules and Load Cells
- Weighing Platforms (Bench and Floor)
- Weighing Transmitters, Scale Indicators
- Communication Modules, Barriers
- Vehicle Scales
- Services

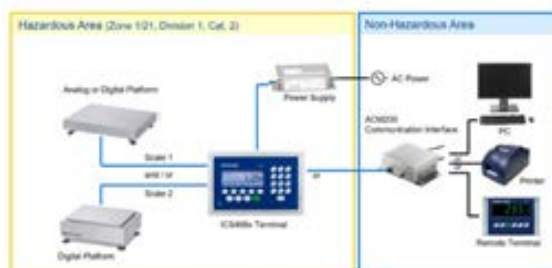



Throughout the catalog, hazardous area approved equipment is accompanied with the yellow Ex triangle.

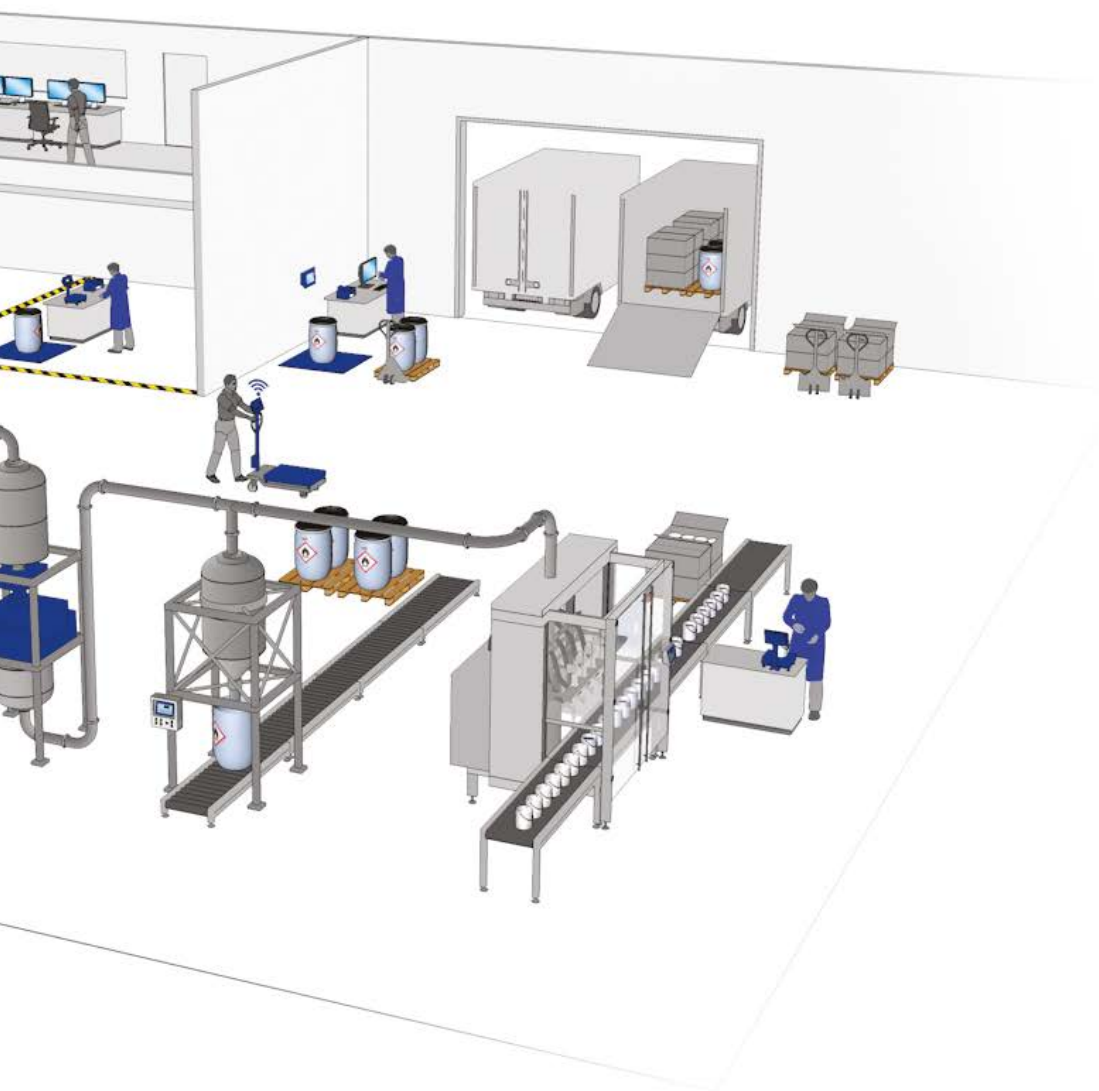

Our Competence in Hazardous Areas

For more information about how to stay compliant and efficient in classified hazardous areas, check out our Hazardous Area Resource Portal. It offers a range of tools, such as white papers, guides, posters, and webinars that help to comply more easily and efficiently with global hazardous area regulations and standards.



► www.mt.com/ind-hazardous-compliance

1

Industrial Scale Indicators, Indicator Software and Transmitters

Page 16 – 55



2

Software

Page 56 –71



3

Bench Scales and Platforms

Page 72 – 125





4

Floor, Low-Profile and Platform Scales

Page 126 – 157



5

Scales for Special Applications

Page 158 – 185



6

Accessories

Page 186 – 193

7

Weigh Modules and Load Cells

Page 194 – 221



8

Automated Precision Weighing

Page 222 – 237



9

Vehicle Scales

Page 238– 253





10

Parcel and Pallet Dimensioning, Weighing and Scanning (DWS)


Page 254 – 269



11

Service

Page 270 – 289

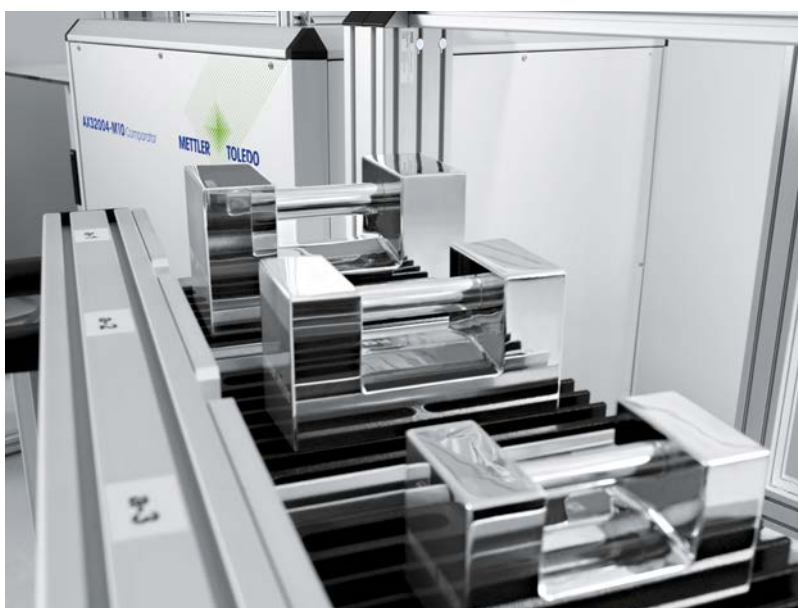


12

Test Weights

Page 290 – 299



Our Solutions For Your Production

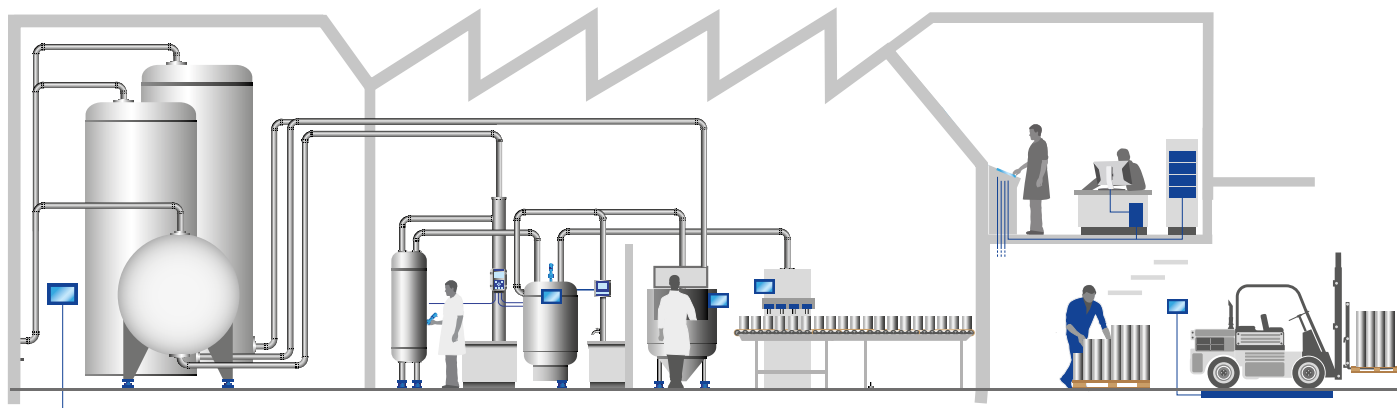

Industrial Scale Indicators, Indicator Software and Transmitters

1

Scale Indicators

Enhanced Productivity and Control	18
Bench and Floor Scales – Flexible and Accurate	18
Tank and Hopper Scales – Simple Integration and Monitoring	22
Vehicle Scales – Control for Your Weighing Process	26
Programmable Scale Indicators – A Tailored Solution	30
Hazardous Areas – Compliance and Safety	34

Scale Indicator Software

Flexible Production Solutions	40
Scale Indicator IND570 with Fill-570 Software – For Filling, Dosing and Blending	40
Batch-780 Application Software – For Formulation or Batching	42

Automation Transmitters/Scale Indicators

High-Performance Data Transmission	44
ACT350, ACT100 Transmitters – Connectivity Made Easy	44
IND360 Modular Transmitter/Scale Indicator – Fastest Automation Made Easy	48

Cloud, ERP and MES Connectivity

Connectivity via OPC UA or MQTT Standard	54
------------------------------------------	----


Scale Indicators for Bench and Floor Scales

Flexible and Accurate

To maximize overall equipment effectiveness, it is critical to use a scale indicator with application flexibility that allows the weighing system to be easily integrated into your overall manufacturing operation. Our scale indicators are designed for use with bench and floor scales so you get a maximum return on your weighing-equipment investment.


► www.mt.com/ind-bench-floor

Many bench scales are used in manual working environments in which equipment ergonomics and ease of use impact operational productivity and quality. The scale indicators' vivid color HMI, multi-lingual operator messages, configuration menu and responsive tactile keys maximize operator efficiency.

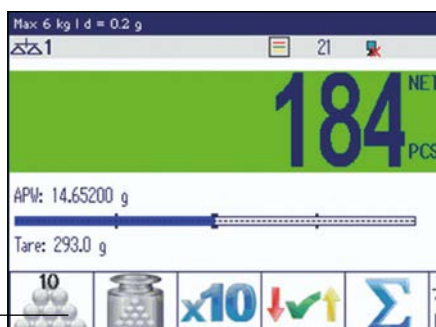

Compact Design

For weighing various-sized items on a compact bench scale, a scale indicator mounted to the front of the scale platform provides good visibility of weight values.

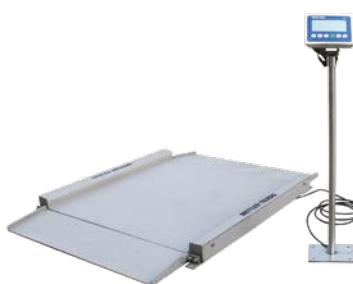

Analog or Digital Scale Bases

Our scale indicators provide an interface to both analog and digital bases, allowing for flexibility based on accuracy or other performance requirements.



Operational Insight

Asset management and weighing performance is recorded and can be exported for analysis and mitigation actions.



Added Capabilities with Peripheral Devices and Systems

For many weighing applications, the process involves capturing data and integrating it into the weighing record, plus sending transaction information to a PC or printer. The scale indicator software and communication interface must be capable of connecting to barcode scanners, external keyboards, remote displays and other devices. Our family of scale indicators helps you create a well-integrated weighing system within your manufacturing operation.

Barcode Scanner

- Scan orders and recall articles
- Identify operators
- Start weighing with a scan



Printer

- PC not necessary at every weighing station
- Immediately create labels using the scale



Collect+ Software

- Visualize weighing and production data
- Monitor production output
- See counting efficiency, filling accuracy and giveaway



Data Transfer

- Use USB as alternative data-transfer method
- Alternatively, use Ethernet or USB as data transfer method or WLAN for mobile solutions





Scale Indicators for Bench and Floor Scales

Provide Enhanced Weighing Productivity

The scale indicator is an important part of a complete weighing solution. These scale indicators are operator-friendly and designed for a variety of bench, compact and floor-scale applications.

► www.mt.com/indicators

	IND930/970 Benefit from applications designed specifically for your process. 		ICS6__ Premium scale indicator for sophisticated applications. 	
Applications	<ul style="list-style-type: none"> • Wide array of MT software solutions: Formulation, Statistical Quality Control • Workflow and workplace-specific programming to support custom filling, formulation, counting, checkweighing, and more 		<ul style="list-style-type: none"> • Intuitive counting, totalizing and manual formulation • Smart checkweighing and portioning • Fast classifying and average weighing 	
Versatility	★★★★★	Multi-scale with flexible configuration per scale	★★★★★	Multiple advanced applications software included
Integration	★★★★☆	Serial, Ethernet TCP/IP, USB, Digital I/O, Profibus	★★★★★	Serial, Ethernet TCP/IP, USB, Digital I/O, WLAN
Data Management	★★★★★	Database stores tara, delta trac, fix text values	★★★★☆	Database stores up to 5,000 articles, csv transaction and table file export
Compliance Support	★★★★★	Alibi memory, user management	★★★★☆	Alibi memory and user management functionality
Performance Optimization	★★★★★	Reproducible working steps aligned to SOPs	★★★★★	Versatile HMI with softkeys, templates and transaction memory
Display	10", 15", or 19" LED		Graphic LCD display with 3 display layouts, colorWeight® functionality	
Keypad	Resistive touchscreen, function keys on 15" HMI		Tactile membrane keypad with 4 x assignable softkeys, scale function keys, and alphanumeric keys; Optional metal keypad available on ICS689 for unmatched ruggedness and hygienic performance	
Scale Interface	Up to 4 scales: analog, SICSpro digital, or SICS lab balance and APW interface, 2 Power-Deck, max. 8 POWERCELLS		4 x analog or SICSpro digital	
Communication Interface	Ethernet TCP/IP, optional USB host/device, RS232/422/485, Digital I/O, Profibus		1 x RS232 standard and 3 optional, RS232, RS422/485, USB device, USB host, Ethernet, WLAN, Digital I/O	
Housing	Stainless steel, wall/desk or panel version		Stainless steel or aluminium die-cast	
IP Protection	IP69k		IP54, IP65, IP67, IP69k	
Power	100 – 240 VAC		90 – 240 AC or rechargeable battery	
Software Applications	ProWorks V1.0, FreeWeigh.NET®, FormWeigh.NET®, SQC, Windows 10 IoT Enterprise based indicator supporting custom application programming		Counting, checkweighing, totalizing, average weighing, Pick and Pack, Speedweigh, CableFree weighing	
More Information	www.mt.com/IND930 or www.mt.com/IND970		www.mt.com/ICS6	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ★☆☆☆☆ none



Metal Keypad Option for ICS429 and ICS689

Watch the video to learn more about our full stainless steel keyboard ensuring hygienic weighing in demanding environments. Easy to clean, easy to operate and very responsive.

► www.mt.com/ICS689

ICS4__

Advanced scale indicator for challenging applications.



- Accurate counting and totalizing
- Advanced checkweighing and portioning
- Fast average weighing



Multiple application software included



Serial, Ethernet TCP/IP, USB, Digital I/O, WLAN



Database stores up to 100 articles, csv transaction and table file export



Alibi memory and user prompting functionality



Versatile HMI with softkeys and templates

Color TFT (320x240) with 3 display layouts, colorWeight® functionality

Tactile membrane keypad with 4 x assignable softkeys, scale function keys and numeric keys
Optional metal keypad available on ICS429 for unmatched ruggedness and hygienic performance

2 x analog or SICSpro digital

1 x RS232 standard and 1 optional RS232, RS422/485, USB device, USB host, Ethernet, WLAN, Digital I/O

Stainless steel or aluminium die-cast

IP54; IP65, IP67, IP69k

90 – 240 AC or rechargeable battery

Counting, checkweighing, totalizing, average weighing

www.mt.com/ICS4

IND246

Basic weighing plus multiple application software apps included.



- Basic weighing
- Simple over/under checkweighing
- Simple counting



Multiple application software included



Serial, Ethernet TCP/IP, USB, Digital I/O



.csv transaction and table file export



Scale statistics, logs, password



Quick navigation, pre-configured templates, SD memory card

240 x 96 backlit transfective graphic LCD
Tactile with 1 x assignable function key and alphanumeric keys

1 x analog or 1 PowerDeck

1 x standard RS232/422/485, optional USB device, RS232/485, Ethernet TCP/IP, Digital I/O

Stainless steel

IP66

100 – 240 VAC or rechargeable battery

Animal weighing, counting, peak weight, checkweighing, vehicle, accumulation

www.mt.com/IND246

IND231/236

Cost-effective scale indicator with no compromise in performance.



- Basic weighing
- Simple over/under checkweighing
- Simple counting



Multiple application software included



Serial, USB, Digital I/O



5 pre-defined print templates



Password protection



Simple navigation

Bright, 40 mm height weight display

Tactile with 2 x assignable function keys

1 x analog scale, up to 4 x 350 ohm

1 x RS232 standard, optional USB device, RS232/422/485, Digital I/O

Polymer or stainless steel

IP54 (polymer) or IP66/67 (stainless steel)

100 – 240 VAC or rechargeable battery

Animal weighing, counting, checkweighing, accumulation, remote display mode

www.mt.com/IND231-236

Tank and Hopper Scale Indicators

Simple Integration and Monitoring

Tank, silo and machine-builder weighing applications require the ability to reliably and accurately interface scale indicators with automation, material-requirements planning and manufacturing execution systems. Applications range from simple weight-data communication with condition monitoring to a plant network to complete control over a part of the manufacturing process via the scale indicator. Select the from a broad range of indicators that exactly matches your automation and operator requirements.

► www.mt.com/ind-tank-silo-hopper

Typical applications include filling, dosing, Rate Control, Dynamic Parcel Weighing, Weight Based Quality Control or blending of liquids and solids, batching or formulation of multiple ingredients and management of raw-material inventory levels. Automation Indicators deliver fast, deterministic weight, free of vibration from outside sources that significantly improves machine throughput.



Easy Integration

Support for multiple fieldbus protocols, sample PLC interface code and extensive product documentation speed up and simplify integration.



Condition Monitoring and Alarms

The POWERCELL® load-cell network helps pinpoint and communicate locally or remotely any weighing-system disturbances that could compromise weighing accuracy.

IND780 Terminal: IND780		
View / Scale Statistics		
Usage	1	2
Usage Time	85%	90%
Usage Cycles / Day	3	0
Transactions / Day	36	0
Total Transactions	36	0
Peak Loading		
Peak Weight Since Power On	104750 kg	54200 kg
Peak Weight	104750 kg	54200 kg
Average Peak Load	14%	0%
Statistics		
Total Weight	680240 kg	0 kg
Scale Under Range	4	0
Scale Overloads	1	0
Zero Commands	3	0
Zero Command Failures	2	0
Zero Command Failures	66%	0%

Operational Insight

Asset management and weighing performance are recorded and can be exported for analysis and mitigation actions.



Many Styles, Approvals and Technologies

Advanced terminals allow you to easily connect to strain gauge sensors as well as smart sensors such as POWERCELL®, High Precision EMFR, mass comparators and lab balances for any weighing application. Global approvals include electrical, hazardous areas and weights-and-measures. Indicators support condition monitoring, web configuration, backup, restore, and multi-language human machine interfaces.

Our family of scale indicators provides capabilities that help you create a well-integrated weighing system within your manufacturing operation.



EtherNet/IP™



Collaborative Automation
by



Tank and Hopper Scale Indicators

From Small to Large, Simple to Complex

A variety of scale solutions for tanks, silos, bins, hoppers and conveyors provide accurate, reliable and flexible integration into your manufacturing process.

► www.mt.com/ind-tank-silo-hopper

	IND780 Power and performance for advanced weighing applications.  		IND570 Performance and versatility, delivered.  	
Applications	<ul style="list-style-type: none"> • Basic weighing • Filling, dosing • Batching and formulation 		<ul style="list-style-type: none"> • Basic weighing • Filling, dosing, blending • Bulk-material handling 	
Versatility	★★★★☆	Multi-scale with flexible configuration	★★★★☆	Powerful application software
Integration	★★★★★	Industrial Ethernet, serial, Ethernet TCP/IP	★★★★☆	Industrial Ethernet, serial, Ethernet TCP/IP, Legacy Automation buses
Data Management	★★★★★	Barcode data integration, tables, SQL interface	★★★★☆	Barcode data integration, multiple tables, reports
Compliance Support	★★★★☆	Hazardous area approved, track and trace capabilities, logs	★★★★☆	Hazardous area approved, track and trace capabilities, logs
Performance Optimization	★★★★★	Advanced calibration, predictive diagnostics	★★★★★	Advanced calibration, diagnostics, GWP
Display	Graphic QVGA backlit color TFT		High-contrast, high-resolution graphic LCD 25 mm-high	
Scale Interface	4 scales, analog or digital, sum scale, pulse counter		1 scale, up to 12 x 350 ohm load cells, up to 14 POWERCELLS® or 1 PowerDeck® or other high-precision platform	
Communication Interface	2 x Standard RS232/422/485, USB host, Ethernet TCP/IP, 2 x Optional RS232/485, EtherNet/IP, Profibus DP, PROFINET, Modbus TCP, DeviceNet, Analog Output, Digital I/O		1 x Standard RS232/422/485, USB host, 2 x Optional RS232/485, Ethernet TCP/IP EtherNet/IP, Profibus DP, PROFINET, Modbus TCP, DeviceNet, Analog Output, Digital I/O, WLAN, CableFree weighing	
Housing	Panel or wall/column/desk mount		Panel or wall/column/desk mount	
Power	85 – 264 VAC		85 – 264 VAC or 24 VDC	
Software Applications	Filling, formulation, batching, customization		Filling, dosing, blending, customization	
Hazardous Area Approvals 	IECEx/ATEX, NEC (Div. 2)		IECEx/ATEX/NEC (Zone 2/22), NEC (Div. 2)	
More Information	www.mt.com/IND780		www.mt.com/IND570	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★★★★ limited ★★★★★ none



Tank Weighing Made Easy

Watch the video to learn how IND360 supports tank weighing applications.

► www.mt.com/IND360-TankVessel-Video

IND360

Ultra fast for automation



- Very High Speed Weighing
- Simple material transfer, filling, dosing
- Tank/Vessel control



Multiple housing styles



Industrial Ethernet, Modbus RTU, 4-20mA, 0-10VDC



Weight and condition Monitoring, ePrint



Metrology, Hazardous approvals, three report logs



CalFREE, CalFree Plus, FACT

Color TFT or Graphic OLED

1 Scale, up to 8x 350 ohm Load Cells, up to 8x POWERCELL, 1x Precision Sensor, or scale, lab balance, mass comparator

1x TCP/IP (service), 1x Optional PROFINET, Profibus DP, EtherNet/IP, Modbus RTU & TCP, EtherCAT, CC Link IE field Basic, Analog Out, Digital I/O

DIN, panel or wall/column (IP69K)

12-24VDC, Option AC 100-240VDC

Tank/Vessel, filling, dosing

IECEx; ATEX; UKCA; FM; cFM; CCC (Zone 2/22), (Div. 2)

www.mt.com/IND360




Vehicle-Weighing Indicators

Control Your Weighing Process

Maximizing your operational performance requires a weighing system that provides accurate, reliable and easy-to-understand information from your vehicle scale. While the vehicle scale itself is the foundation of your weighing system, without a high-performance scale indicator, you cannot maximize efficiency in your operations that depend on vehicle-weight data.

► www.mt.com/ind-vehicle

Vehicle-management software with databases of stored truck information and control over gates and loops provides increased productivity and improves the utilization of a vehicle scale. On-board data storage makes reporting easy. Efficient file export and flexible communication simplify data export to higher-level operations and software applications.

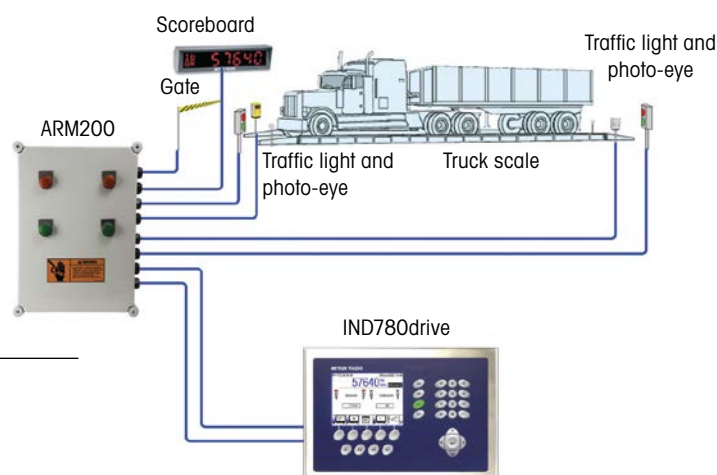

Protection from Environmental Influences

Lightning-strike resistant electronics and an EMI-protected digital signal to all load cells ensure reliability.



Advanced Diagnostics and Alarms

The POWERCELL® load-cell network helps pinpoint and communicate (locally or remotely) weighing-system disturbances that could compromise weighing accuracy.

IND780 Terminal: IND780		
View / Scale Statistics		
Usage	1	2
Usage Time	85%	90%
Usage Cycles / Day	3	0
Transactions / Day	36	0
Total Transactions	36	0
Peak Loading		
Peak Weight Since Power On	104750 kg	54200 kg
Peak Weight	104750 kg	54200 kg
Average Peak Load	14%	0%
Statistics		
Total Weight	680240 kg	0 kg
Scale Under Range	4	0
Scale Overloads	1	0
Zero Commands	3	0
Zero Command Failures	2	0
Zero Command Failures	66%	0%

Operational Insight

Asset management and weighing performance is recorded and can be exported for analysis and mitigation actions.



Interface with POWERCELL® PDX®

The power and flexibility of METTLER TOLEDO scale indicators enable them to be successful in the most demanding vehicle-weighing applications. The latest-generation POWERCELL® PDX® load cell provides protection beyond traditional analog load cells, securing both the integrity of your process and your profits. Accurate vehicle scale weights are ensured, day in and day out, under the most severe operating conditions, with predictive diagnostics constantly monitoring your scale and minimizing downtime costs.

POWERCELL PDX networks guard against failure by monitoring, logging and proactively notifying users on a variety of factors that can affect system integrity.



Vehicle-Weighing Indicators

Drive Your Business


The scale indicator is an important part a complete truck-scale solution. Our range of scale indicators provides you with a variety of solutions to perfectly fit your application needs.

► www.mt.com/ind-vehicle

IND780

Power and performance for advanced weighing applications.



Applications	<ul style="list-style-type: none">• Advanced vehicle software with gate and loop control• Advanced database functions• Multi-scale applications	
Versatility	★★★★★	Multi-scale with flexible configuration per scale
Process Integration	★★★★★	Industrial Ethernet, serial, Ethernet TCP/IP, Digital I/O
Data Management	★★★★★	Barcode data integration tables, SQL interface
Compliance Support	★★★★☆	Hazardous area approved, track-and-trace capabilities, logs
Performance Optimization	★★★★☆	Lightning protection, basic diagnostics, unattended applications
Display	Graphic QVGA backlit color TFT	
External QWERTY Keyboard Interface	Yes	
Scale Interface®	POWERCELL® PDX or MTX or analog	
Max. Number of Load Cells	350 ohm analog: 16 (8 per channel), POWERCELL PDX and MTX: 14 (24 with optional external power supply)	
Max. Number of Scale Channels	4 and a sum scale	
Communication Interface	2 x Standard RS232/422/485, USB host, Ethernet TCP/IP, 2 x Optional RS232/485, EtherNet/IP, Profibus DP, PROFINET, Modbus TCP, DeviceNet, Analog Output, Digital I/O	
Power	85 – 264 VAC	
Hazardous Area Approvals 	IECEX/ATEX (Zone 2/22), NEC (Div. 2)	
More Information	www.mt.com/IND780	
Requirement fulfillment scoring: ★★★★★ very good ★★★★★ good ★★★★★ fair ★★★★★ limited ★★★★★ none		

IND570

High performance, versatility, and easy configurability for vehicle applications.



IND246

Reliable operation with easy-to-learn functionality for vehicle weighing.



- Simple vehicle management; inbound/outbound control
- Advanced vehicle filling functions
- Advanced asset management

- Simple inbound/outbound weighing
- Transaction data export via PC utility
- Interface to PC-based truck-scale software



Basic vehicle software, filling software, programmable



Analog or POWERCELL® models, vehicle software



Industrial Ethernet, serial, Ethernet TCP/IP, Digital I/O



Serial, Ethernet TCP/IP, Digital I/O



Barcode input, ftp and USB file import/export, tables, reports



.csv transaction and table file export



Hazardous area approved, track-and-trace capabilities, logs



Basic track-and-trace logs



Lightning protection, local and remote diagnostics, untended applications



Lightning protection, basic diagnostics

High-contrast, high-resolution graphic, LCD 25 mm-high

240 x 96 backlit graphic LCD

Yes

No

POWERCELL® PDX or analog

POWERCELL® or analog

350 ohm analog: 12, POWERCELL PDX: 14

350 ohm analog: 10, POWERCELL PDX or GDD: 12

1

1

2 x Standard RS232/422/485 USB host, 2 x Optional RS232/422/485, Ethernet TCP/IP, EtherNet/IP, Profibus DP, PROFINET, Modbus TCP, DeviceNet, Analog Output, Digital I/O, WLAN

1 x Standard RS232/422/485 and optional USB device, 1 x optional RS232/485, Ethernet TCP/IP, Digital I/O

85 – 264 VAC, 24 VDC available in panel-mount models

85 – 264 VAC

IECEx/ATEX/FM (Zone 2/22), NEC (Div. 2)

n/a

www.mt.com/IND570

www.mt.com/IND246

Programmable Scale Indicators

A Tailored Solution

METTLER TOLEDO channel partners have the weighing expertise and local support capabilities to provide a complete weighing solution. Depending on your process, it can be beneficial to customize the application software running on the scale indicator. Several of our scale indicators have the ability to run customized software, optimizing your manufacturing operations.

► www.mt.com/ind-programmable

The right software architecture ensures that weighing functionality is not affected when custom programs are used with our programmable scale indicators. Our scale indicators also provide powerful standard software functionality so the customized solutions benefit from the many core functions that exist in the scale indicator.



Powerful Data Interface

SQL data replication functions are supported, allowing for syncing between scale indicator and external databases.



HMI Customization

Touch and non-touch color HMI with a broad variety of intuitive icons provide a rich canvas on the user interface.



Flexible Connectivity

Data interface to peripheral devices, automation and plant networks can be managed via a variety of serial and Ethernet-based connections.



Integrate with PC or PLC-Based Applications

While standard scale indicator software manages data interfaces in a flexible way, there are many applications that could benefit from modifying the scale indicator HMI information layout and database format. The ability to export to an external database or guide an operator through a complex operation via a sequence of manual and automated actions is also desirable.

The secure, stable, documented and supported METTLER TOLEDO scale indicator software customization tools, such as Visual Studio, provide programmers with a solid toolset from which to create their applications. Additionally, program files can be backed up, archived or shared via standard methods.



Custom Programmable Scale Indicators

A Perfect Fit within Your Process


Advanced weighing applications often can be made more efficient with a custom-programmed scale indicator that provides a tightly integrated and powerful system. We offer a range of programmable scale indicators from which to select the most suitable solution.

► www.mt.com/ind-programmable

IND930/IND970

Benefit from applications designed specifically for your process.



Applications	<ul style="list-style-type: none"> • Wide array of MT software solutions: Formulation, Statistical Quality Control • Workflow and workplace specific programming to support custom filling, formulation, counting, checkweighing, and more 	
Versatility	★★★★★	Multi-scale with flexible configuration per scale
Process Integration	★★★★☆	Serial, Ethernet TCP/IP, USB, Digital I/O, Profibus
Data Management	★★★★★	Database stores tara, delta trac, fix text values
Compliance Support	★★★★★	Alibi memory, user management
Performance Optimization	★★★★★	Reproducible working steps aligned to SOPs
Display	10", 15", or 19" LED	
Keypad	Resistive touchscreen, function keys on 15" HMI	
Scale Interface	Up to 4 scales: analog, SICSpro digital, or SICS lab balance and APW interface, 2 PowerDeck, max. 8 POWERCELLS	
Communication Interface	Ethernet TCP/IP, optional USB host/device, RS232/422/485, Digital I/O, Profibus DP	
Housing	Stainless steel, wall/desk or panel version	
IP Protection	IP69k	
Power	100 – 240 VAC	
Programming Environment and OS	MS Visual Studio, WIN10 IoT Enterprise	
Hazardous Area Approvals 	n/a	
More Information	www.mt.com/IND930 or www.mt.com/IND970	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ★☆☆☆☆ none



Programmable Scale Indicators

Programmable scale indicators make unique applications easily customizable. For more information, visit:

► www.mt.com/IND930

► www.mt.com/IND970

IND780

Multi-scale connectivity with outstanding connectivity to automation equipment.



IND570

Flexible scale indicator with many advanced weighing features.



- Custom filling, dosing or blending
- Custom vehicle weighing
- Custom workflow

- Custom filling, dosing or blending
- Custom vehicle weighing
- Custom workflow



Multiple fonts, colors and program objects to choose from via the programming tool



Multiple fonts, and program objects to choose from via the programming tool



Serial, Ethernet TCP/IP, USB, Digital I/O, pulse counter, clustering of multiple scale indicators



Serial, Ethernet TCP/IP, USB, Digital I/O



Ethernet, FTP and email functions; file replication, PC app call-backs, table management



Ethernet, FTP and email functions; file replication, PC app call-backs, table management



Asset identification, multi level password protection, track-and-trace logs, hazardous area approved



Asset identification, multi level password protection, track-and-trace logs, hazardous area approved



Integration with external SQL databases via remote data access



Customization of HMI, control Digital I/O, create custom workflow with prompting

320 x 240 pixel backlit, active TFT, color LCD

256 x 128 dot monochrome graphic LCD

Alphanumeric with tactile response, 4 application keys, and 15 assignable softkeys

Alphanumeric with tactile response and 15 assignable softkeys, navigation keys

Up to 4 x analog scale, POWERCELL®, SICS lab balance, or SICSpro digital scales

1 x analog scale, 1x SICSpro scale, or 1 x POWERCELL® network or 1 x PowerDeck

Standard Ethernet TCP/IP, USB host, 2 x standard RS232/422/485 and 2 x optional RS232/485, Digital I/O, Industrial Ethernet

1 x standard RS232/422/485, USB and 2 x optional RS232/485, Ethernet TCP/IP, Digital I/O, Industrial Ethernet

Stainless steel, wall/desk or panel

Stainless steel, wall/desk or panel

IP69k, IP65 (panel version)

IP69k, IP65 Type4x/12 (panel version)

85 – 264 VAC

85 – 264 VAC, 24 VDC available in panel-mount models

METTLER TOLEDO TaskExpert or MS Visual Studio

METTLER TOLEDO TaskExpert

IECEx/ATEX (Zone 2/22), NEC (Div. 2)

IECEx/ATEX/NEC (Zone 2/22), NEC (Div. 2)

www.mt.com/IND780

www.mt.com/IND570

Scale Indicators for Hazardous Areas

Compliance and Safety

Protection and safety without compromise are requirements for working in hazardous areas. These scale indicators have been certified to the latest global standards, helping to ensure that your weighing system is suitable for such production environments. Additionally, they provide enhanced capabilities for the safe communication of weighing data to the hazardous area via a variety of interfaces.

► www.mt.com/ind-hazardous

METTLER TOLEDO offers hazardous area approvals in most major markets. Obtaining required approvals, such as ATEX, IECEx, NEPSI, US/Canada NEC/CEC and other local standards, helps to ensure that equipment meets local regulatory requirements.



Easy Integration

Support for multiple fieldbus protocols, sample PLC interface code and extensive product documentation increases processing speed up and simplify integration.



Filling, Dosing and Blending

Powerful application software and I/O suitable for use in hazardous areas automates the material transfer process.



AC or Battery Powered

Scale indicators can be powered either via a fixed AC power supply or a compact rechargeable battery to enable mobile-weighing applications.



Safety and Connectivity in Explosive Environments

To increase safety while improving production efficiency, intrinsically safe equipment is the protection method of choice. Intrinsically safe weighing systems for hazardous areas consist of several components, such as weighing platforms, scale indicators, power supplies, communication modules and safety barriers. Typically, they can also incorporate a wide range of peripherals, such as PCs, printers or data communication systems. METTLER TOLEDO's intrinsically safe scale indicators provide the benefits of modularity and flexibility to allow a variety of communication interfaces, such as serial interfaces, WiFi, Ethernet TCP/IP and a wide range of automation fieldbus types.



Scale Indicators for Hazardous Areas

Deliver Safety and Connectivity


Intrinsically safe technology provides protection without difficult-to-maintain and bulky cast flame-proof enclosures. Our range of intrinsically safe scale indicators for use in Zone 1/21 and Division 1 areas provides safe basic weighing or, for more advanced applications, connectivity to peripheral devices in non-hazardous or hazardous areas.

► www.mt.com/ind-hazardous

IND560x

Flexible and powerful scale indicator that provides connectivity to a broad variety of automation equipment.



Applications	<ul style="list-style-type: none"> • Basic weighing • Filling, dosing, blending • Bulk material handling 	
Versatility	★★★★☆	Battery or AC power versions, wall/desk or panel mounting, remote display mode
Process Integration	★★★★☆	Serial, Ethernet TCP/IP, Digital I/O, PLC
Data Management	★★★★☆	Stored targets, multiple tables and reports
Compliance Support	★★★★☆	Hazardous area approved
Performance Optimization	★★★★☆	Ability to automate filling and dosing processes with standard and advanced Fill-560 software
Display	128 x 64 dot matrix LCD graphical display with backlight	
Keypad	Tactile with 5 x assignable softkeys, scale function keys and alphanumeric keys	
Scale Interface	1 x analog scale up to 4 x 350 ohm load cells or 1 x Kx IDNet base or 1 x PBKx/PFKx SICSpro scale	
Communication Interface	1 x standard RS232 and optional 1 x RS232, RS422/485, Ethernet TCP/IP, USB, or PLC via current loop or fiber option connection to ACM500 communication module in the non-hazardous area	
Housing	Stainless steel, wall/desk or panel	
IP Protection	IP69k, IP65 (panel version)	
Power	Connection to METTLER TOLEDO AC power supply or external battery installed in the hazardous area	
Hazardous Area Approvals 	IECEx/ATEX (Zone 1/21), NEC (Div. 1 and Zone 1)	
More Information	www.mt.com/IND560x	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ★☆☆☆☆ none



Intrinsically Safe Solutions

Intrinsic safety makes weighing in classified areas safe. Download our white paper on intrinsic safety:

► www.mt.com/ind-intrinsic_safety

ICS466x

Fits perfectly with compact bench scales, for simple filling or advanced checkweighing.



IND256x

Versatile scale indicator supporting standalone weighing applications and multiple communication interfaces.



- Basic weighing
- Custom filling, checkweighing, dosing and blending
- Custom workflow



Connection to both an analog and a digital scale with one scale indicator



Serial data interface to the non-hazardous area



Store up to 100 targets with the internal database



Hazardous area approved, alibi memory, user prompting.



colorWeight® indication of weight status

- Basic weighing
- Simple checkweighing
- Mobile weighing



Battery, AC, DC power versions, remote display mode



Serial data interface to non-hazardous area, WiFi, 4-20mA AO



Store up to 25 targets with the internal database



Hazardous area approved, alibi memory, passwords.



Easy to use

240 x 96 graphic display with colored backlight

Tactile with 5 x assignable softkeys, scale function keys and alphanumeric keys

Up to 1 x analog and 1 x IDNet, or 2 x IDNet Kx base, or 2 x PBKx/PFKx SICSpro scales

1 x standard RS232 and optional 1 x RS232, RS422/485, via current loop connection to ACM200 communication module in the non-hazardous area

Stainless steel, wall/desk

IP65

Connection to METTLER TOLEDO AC power installed in the hazardous area

IECEX/ATEX (Zone 1/21), NEC (Div. 1 and Zone 1)

www.mt.com/ICS466x

240 x 96 pixel white backlit LCD display

5 x assignable softkeys, scale function keys and alphanumeric keys

1 x analog scale up to 4 x 350 ohm load cells

1 x standard RS232, 1 x optional WiFi, 1 x optional 4 – 20 mA AO, and optional 1 x RS232, RS422/485, via current loop connection to ACM200 communication module in the non-hazardous area

Stainless steel, wall/desk

IP66

Internal AC/DC (ATEX/IECEx only) or connection to METTLER TOLEDO AC power supply or an external battery installed in the hazardous area (for FM version)

IECEX/ATEX/NEC (Zone 1/21), NEC (Div. 1)






www.mt.com/IND256x

Hazardous Area Indicator Accessories

Modern Communication and Energy Supply

Power supplies and communication modules are a critical part of a hazardous-area scale indicator system. These accessories are designed and approved for seamless use with METTLER TOLEDO hazardous-area scale indicators.

► www.mt.com/ind-hazardous

	APS768x 120V or 230VAC external power supply for use in the Zone 1/21 and Division 1 areas.  	APS500/501 120V or 240VAC external power supply for use in the Zone 1/21 and Division 1 areas.  
	<ul style="list-style-type: none"> • Robust Design Suitable for washdown and corrosive environments. • Versatile Connectivity Provides connection of digital bases to the non-hazardous area with ACM200 communication module. 	<ul style="list-style-type: none"> • Compact Design Suitable for mounting via screws to a flat surface.
Interface to Scale Indicator Models	IND560x, ICS466x	IND256x
Input Voltage	120VAC and 230VAC versions	120VAC and 240VAC versions
Dimensions	320 x 172 x 80 mm	170 x 153 x 108 mm
Housing Material	Stainless steel	Cast aluminum
Protection Rating	IP66	IP66
Cable Length	5 m cable to scale indicator	3 m cable to scale indicator
Hazardous Area Approval 	IECEx/ATEX (Zone 1/21), NEC (Div. 1 and Zone 1)	IECEx/ATEX (Zone 1/21), NEC (Div. 1)



Hazardous Area Scales and Solutions

The right power supplies and communications accessories ensure the safe performance of scale indicators located in hazardous areas. Learn more at:

► www.mt.com/ind-hazguide

64060627/64060625

8AH NiMH external battery for use in the Zone 1/21 and Division 1 areas.



30538111

8AH NiMH external battery for use in Zone 1/21 and Division 1 areas.



ACM200

Non-hazardous area communication module.



ACM500

Non-hazardous area communication module.



• Robust Design

Suitable for washdown and corrosive environments.

• Easy Mounting

Can mount to any flat surface via fastening screws.

- Must be charged in the non-hazardous area via 64060217 or 64060490 battery charger.

• Robust Design

Suitable for washdown and corrosive environments.

• Easy Mounting

Can mount to any flat surface via fastening screws.

- Must be charged in the non-hazardous area via country specific battery charger.
- Country specific battery, charger, and scale indicator cable installation kits available.

• Non-hazardous area Communication

Sends serial data via a CL interface from weighing scale indicator to a PC, printer or other device.

• Flexible Interface

1 x RS232, RS422/485 or to connect to IDNet, SICSpro scale indicator in non-hazardous area

• Scale Commands

Can be used to send scale commands, such as zero, tare, or print, from the area; supports SICS commands for scale status and weighing commands.

• Non-hazardous area Communication

Communicate via serial and Ethernet TCP in the non-hazardous area.

• Flexible Interface

Support current loop or fiber-optic connection to the non-hazardous area.

• Expanded Functionality

Provides PLC fieldbus and remote I/O connectivity.

IND560x

133 x 236 x 76 mm

Stainless steel

IP66

3 m cable to scale indicator

IECEX/ATEX (Zone 1/21),
NEC (Div. 1 and 2; Zone 1)

IND256x

133 x 236 x 76 mm

Stainless steel

IP66

3 m cable to scale indicator

IECEX/ATEX/NEC (Zone 1/21),
NEC (Div. 1)

IND256x, ICS466x, IND560x

100 – 240 V AC, 50/60 Hz or 24VDC

69.5 x 175 x 160 mm

Stainless steel

IP66

Up to 300 m CL (ordered separately)

IECEX/ATEX (Zone 1/21), NEC (Div. 1)

IND560x

100 – 240 V AC, 50/60 Hz

208 x 263 x 116 mm

Stainless steel

IP66

Up to 300 m CL or fiber optic

IECEX/ATEX (Zone 1/21), NEC (Div. 1)

Indicator IND570 with Fill-570 Software For Filling, Dosing and Blending

Modular, multi-functional and easy-to-program, IND570fill supports quick adaptation of material-delivery processes to changing business needs. Whether integrated into an existing control system or functioning as a stand-alone process controller, IND570fill provides flexibility to deploy workforce and manufacturing resources for maximum productivity.

► www.mt.com/IND570

Fill-570 offers easy-to-program filling, blending and dosing sequences, together with fast-updating discrete I/O. These capabilities combine to create a reliable and accurate stand-alone process controller offering real potential for savings.



Performance Monitoring

The Pac Statistics function calculates performance statistics. It provides data to help identify system adjustments that can shorten cycle times, reduce waste and improve margins.



Integrated Data Storage

Fill-570 includes libraries for materials, formulas and containers. Recall stored data for use in production with an easy barcode scan to improve process efficiency and avoid errors.



Expandable Solution

The IND570 scale indicator offers multiple PLC interfaces and a broad command set that eases integration into existing control structures so you can capitalize on existing investments.



Supported Material Transfer Cycles

Enhanced Material Handling Capability for IND570

The following pre-programmed material transfer cycles and features are included:

- Fill
- Blend (up to 6 materials)
- Dump
- Dose
- Cycle Combinations
- Learn Mode
- Auto Tolerance Check
- Auto Spill Adjustment



Batch-780 Application Software For Formulation or Batching

Engineered for the food, specialty chemical, plastics, glass and aggregates batching and formulation markets, IND780batch works as a stand-alone scale indicator for single- or multi-scale applications. It offers configurable IO with high speed cut-off and Ethernet connectivity for PCs. Installation and setup are quick and easy, providing a "box-to-batch" solution.

► www.mt.com/IND780batch

The IND780 batch provides multiple control options. The system is easily adapted to most batching, filling and formulation applications, providing functionality for automatic, semi-automatic and manual modes of operation. It also supports automatic material transfer with input from up to four scales.




Stand-Alone Operation

Operating without the need for a PLC or DCS system, the IND780batch is equipped with a large, easy-to-read color graphics HMI display.



Easy Configuration

IND780batch includes libraries for materials, formulas and containers. Recall stored data for use in production with a barcode scan to improve process efficiency and avoid errors.

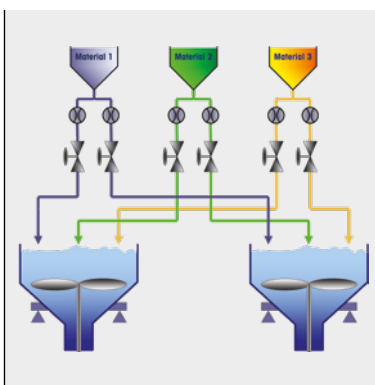

Increased Manufacturing Efficiency

Enhance your automatic material transfer batch process by adding the Q.iMPACT® predictive filling control feature.



IND780batch PC Configuration Tool

Configures equipment, creates and manages recipes and orders, generates track-and-trace data and reports; provides connectivity to customers databases




Barcode Scanner Input devices

simplify material lot and batch tracking




Printer

IND780batch scale indicator prints batch data automatically and on demand



Recipes / Orders

Configuration tool downloads recipes and orders to one or more IND780batch scale indicators



Batching System

IND780batch scale indicator controls automatic and manual batching processes






Integrated Batching Solution

Features and Benefits

Controller	Self-contained, stand-alone controller
Simultaneous Operation	Supports up to 4 scales
Inputs and Outputs	Supports up to 40 inputs and 56 outputs
Formulation Mode	Manual formulation only or fully-automatic
PC Configuration Tool	Allows recipe and order creation, track and trace logging, security setup, and usage report
Storage	Storage for up to 1,000 recipes that can each contain up to 99 steps
Batch Adjustments	Ability to adjust batch order size by percent, target value, or ingredient amount with recipe looping capability

► www.mt.com/Indicators


A detailed view of a rackmountable power supply unit. The unit features a control panel on the left with buttons for MODE, RUN, ERR, USER, BAT, and BOOT. Below these is a 'FULL' indicator and a USB port. A 'TEST' button is located on the right side. The unit has two large cooling fans in the center. On the right side, there is a 'PROFIBUS LPT' port. The bottom of the unit shows 'O/F FRONT' and 'BAT' labels. The unit is mounted in a rack, with other units visible in the background.

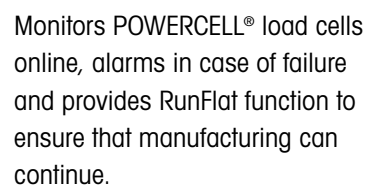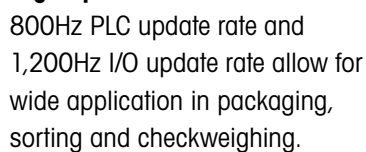



Onboard Web Interface

Each ACT weight transmitter provides a web Interface for setup and maintenance. This eases installation and allows for remote service.

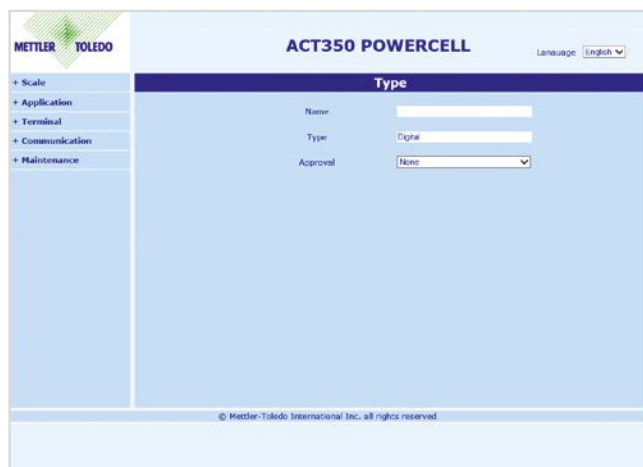

EtherNet/IP™


Automation Transmitters

Process More, Faster

Automation transmitters convert the load-cell signal into a scale signal that is PLC-compliant and digital or analog-output ready for post-processing. They are typically installed in control cabinets.

► www.mt.com/ind-ACT-weight-transmitters

	ACT350	ACT350 Dual Port, DIO
		
	<ul style="list-style-type: none"> • Automation Connectivity Direct certified automation connection to leading networks • Fast and Accurate High-speed PLC communication for full system control via PLC software 	<ul style="list-style-type: none"> • Ethernet Switch Built in switch for Ring Networks (DLR and MRP) • Fast and Accurate High-speed PLC communication for full system control via PLC software
Applications	Filling, batching, general weighing	Filling, batching, general weighing
Interface	Profibus DP, PROFINET, EtherNet/IP, Ethernet TCP/IP	Profibus DP, PROFINET, 2x EtherNet/IP, TCP/IP
Control System Update Rate	800Hz	800Hz
Web Interface (Chrome, Edge)	Yes	Yes
Digital I/O	no	3 x In, 5 x Out, 1,200Hz update
Power	12 – 30VDC	12 – 30VDC
Load Cell	8 x 350 Ohm analog	8 x 350 Ohm analog
Accuracy	OIML C6, NTEP 10,000	OIML C6, NTEP 10,000
Hazardous Area Approvals 	n/a	ATEX and IECEx (Zone 2), NEC (Div. 2)
Housing, Protection	DIN Rail, plastic, IP20	DIN Rail, plastic, IP20
More Information	www.mt.com/ACT350	www.mt.com/ACT350



ACT350 PLC Sample Code

Download the sample code for easy PLC integration:

► www.mt.com/ind-ACT350-downloads

ACT350 POWERCELL®



ACT350 Precision



ACT100



• Ethernet Switch

Built in switch for Ring Networks (DLR and MRP)

• POWERCELL® Diagnosis

Monitors POWERCELL load cells and alarms in terms of failure; RunFlat simulates defective load cells

• Ethernet Switch

Built in switch for Ring Networks (DLR and MRP)

• Precision Weighing

Connect MT precision weigh modules and scales to modern control systems

• 4–20mA, 0–10V output

Basic connectivity to PLC or DCS

• Onboard Web Server

For easy setup, maintenance and remote service

High-performance weighing

High precision weighing

Basic control connectivity

Profibus DP, PROFINET, 2x EtherNet, PROFINET

PROFINET, EtherNet/IP

4 – 20 mA, 0 – 20 mA, 0 – 24 mA, 0 – 5 V, 0 – 10 V; 16 bit resolution

up to 100 Hz

100Hz

200Hz

Yes

Yes

Yes

3 x In, 5 x Out

3 x In, 5 x Out

3 x In, 2 x Out

24VDC, 12VDC hazardous

24VDC

12 – 30VDC

14x POWERCELL, 4x POWERCELL hazardous

Precision Scales and mass comparators

4 x 350 Ohm analog

OIML C10, NTEP 10,000

See weigh module/scale

16bit Resolution

ATEX and IECEx (Zone 2), NEC (Div. 2)

n/a

ATEX and IECEx (Zone 2), NEC (Div. 2)

DIN Rail, plastic, IP20

DIN Rail, plastic, IP20

DIN Rail, plastic, IP20

www.mt.com/ACT350-powercell

www.mt.com/ACT350-precision

www.mt.com/ACT100

Modular Family Concept


Fastest Automation Made Easy

The IND360 automation weight indicators offer ultra-fast processing connected to the world's most widely used PLCs and DCSs to increase productivity and operational uptime. Condition monitoring and Smart5™ alarming provide instant visibility to the system status so that you are confident in your machine performance and avoid out-of-spec products.

► www.mt.com/IND360


Bright Color Display

Bright color display provides instantaneous access to weight information, a visualization of the application status and Smart5™.

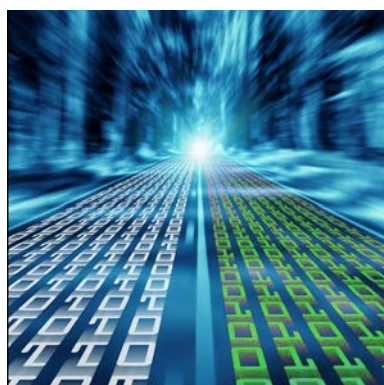


High speed communication

IND360 communicates cyclically at up to 960Hz via industrial Ethernet and acyclically to facilitate one-time control functions.

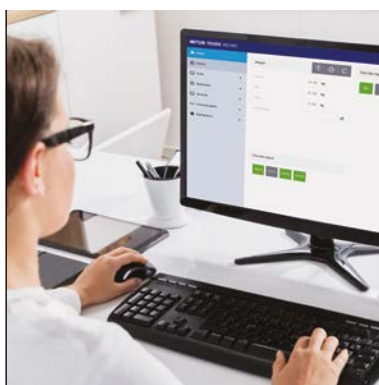

Configure, Monitor, and Backup

A web interface is available for parameter configuration, status reading, diagnostics, data cloning, backup, and restore.

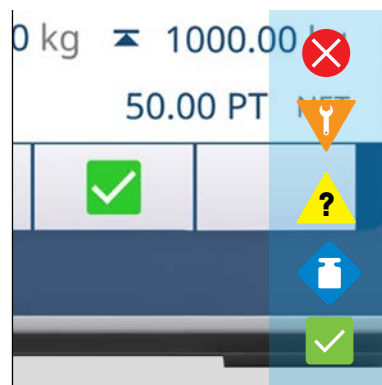

"Smart5" Condition Monitoring

The display indicates alarm status according to NAMUR NE107, including operator instructions.



Configurable Applications

IND360 transmitters/scale indicators provide a variety of applications that can be quickly integrated into control systems. All weighing and the time critical operations are executed on IND360 whereas the PLC or DCS only needs to send control commands and monitors operation.

- Filling/Dosing
- Tank Weighing
- Rate Control*
- Dynamic (Parcel) Weighing*

* in preparation



EtherNet/IP™








Modular Family Concept

Easy Integration and Startup

The IND360 family offers three modules based on the same core technology with global approvals to minimize complexity for machine builders, integrators and end-users when designing customized solutions. The scale indicator family allows you to reuse existing PLC software no matter what sensor technology, size or accuracy – even connects mass comparators for highest accuracy.

► www.mt.com/IND360

	IND360 Base DIN For installation in control cabinet. <div>   </div>	IND360 Base Panel Bright graphical Color TFT display <div>   </div>
	<ul style="list-style-type: none"> • Ultra fast, easy PLC connectivity 960Hz update rate for efficient PLC control • Full remote setup and control via Web Interface and PLC 	<ul style="list-style-type: none"> • Full visual scale control Weight, status and alert quickly visible • Full remote setup and control via Webserver and PLC
Applications	Basic weighing, fast PLC/DCS control	Basic weighing, fast PLC control, clear scale status visibility
Display	OLED, Status LEDs	Color TFT
Interface Options	PROFINET, Profibus DP, EtherNet/IP, EtherCAT, CC-Link IE Field Basic, Modbus RTU, Modbus TCP, Ethernet TCP/IP, 4-20mA, DIO	PROFINET, Profibus DP, EtherNet/IP, EtherCAT, CC-Link IE Field Basic, Modbus RTU, Modbus TCP, Ethernet TCP/IP, 4-20mA, DIO
Smart5 Alarming	NAMUR NE107 prioritized alarm status	NAMUR NE107 prioritized alarm status
PLC Update Rate	960Hz, up to 7 cyclic floating point variables	960Hz, up to 7 cyclic floating point variables
Web Interface	Yes, via separate TCP/IP connection, various security levels	Yes, via separate TCP/IP connection, various security levels
Power	24VDC nominal	24VDC nominal, 100-240VAC option
Load Cell/Scale/WeighModule	Analog, POWERCELL, High precision scale	Analog, POWERCELL, High precision scales
Approvals and Certificates	OIML, NTEP, UL, cUL, CE, FCC, CB	OIML, NTEP, UL, cUL, CE, FCC, CB
Hazardous Area Approvals 	IECEx/ATEX/UKCA (Zone 2), NEC (Div. 2)	IECEx/ATEX/UKCA (Zone 2/22), NEC (Div. 2)
Housing, Protection	DIN Rail, plastic, IP20	Panel IP65, housing plastic IP20
More information	www.mt.com/IND360	www.mt.com/IND360



Learn more about IND360

Download IND360 product brochure.

► www.mt.com/IND360-br

IIND360 Base Harsh

IP69K for tough environment



- **Full visual scale control**

Weight, status and alert quickly visible

- Full remote setup and control via Webserver and PLC

Basic weighing in harsh areas, fast PLC control, clear scale status visibility

Color TFT

PROFINET, Profibus DP, EtherNet/IP, EtherCAT, CC-Link IE Field Basic, Modbus RTU, Modbus TCP, Ethernet TCP/IP, 4-20mA, DIO

NAMUR NE107 prioritized alarm status

960Hz, up to 7 cyclic floating point variables

Yes, via separate TCP/IP connection, various security levels

24VDC nominal, or 100-240VAC according to configuration

Analog, POWERCELL, High precision scales

OIML, NTEP, UL, cUL, CE, FCC, CB

IECEx/ATEX/UKCA (Zone 2/22), NEC (Div. 2)

IP69K, stainless steel

www.mt.com/IND360



Multitude of Applications

Distributed Control Offloads Critical Tasks

Preprogrammed applications encapsulate core functionalities allowing you to quickly create a reliable, high-performance system even when you use a cost effective, entry-level PLC. Turnkey software packages save you valuable engineering time because they include state-of-the art control algorithms, a powerful automation interface, discrete I/O and are accompanied by domain specific approvals.

► www.mt.com/IND360

Application Screen

All relevant information at a glance with the application HMI.

IT Network

Interface IND360 fitted with a dedicated network port for IT connectivity and web access.



Perfect Connectivity

IND360 delivers an extensive set of application specific data points with high update rate through Industrial Ethernet. This allows customizing and optimizing your workflow where needed using the PLC.



Fill/Dose

IND360's advanced filling application continuously optimizes accuracy and speed, provides automatic jog, a state machine and is Legal for Trade approved (MID).



Tank/Vessel

Built for tank and silo inventory control, this application monitors the filling level and raises warnings and alarms when critical levels are reached. Includes automatic refill.



From Semi-Automatic to Automation

When integrated into an automation system, IND360 handles time-critical tasks freeing the PLC up for other important work to improve overall system speed. In addition, IND360 supports stand-alone operation for cost optimized systems (e.g. for a bag-filler).

IND360's applications help you increase productivity and reduce cost.

- Tank weighing and level detection
- Filling and Dosing

Learn more at:

► www.mt.com/IND360-apps



Cloud, ERP and MES Connectivity

Comply with Future Data Management

OPC UA and MQTT are the new communication standards for non-time critical data exchange with ERP or cloud-based services. METTLER TOLEDO offers edge-computing gateways with these communication technologies to connect new products and to update existing brownfield installations to extend their profitable life.

► www.mt.com/ind-iiot-gateway

The ACI400 IIoT Edge device includes state-of-the-art security functionality. The robust device includes two 1GB LAN ports to provide separation between the IT network (MES, ERP, Cloud) and the process network (weighing devices).



Designed for Weighing

The comprehensive parameter set is suitable for all common weighing applications and weight capacities. It provides you essential information for further processing in MES, ERP and Clouds.




Essential Data Security

The MQTT clients and OPC UA server both provide methods to implement certificate based authentication and encryption to provide secure connections.



Efficient Configuration

Web Interface is available for on-site and remote configuration, as well as for updating the ACI400 IIoT Edge firmware as new IoT capabilities evolve.

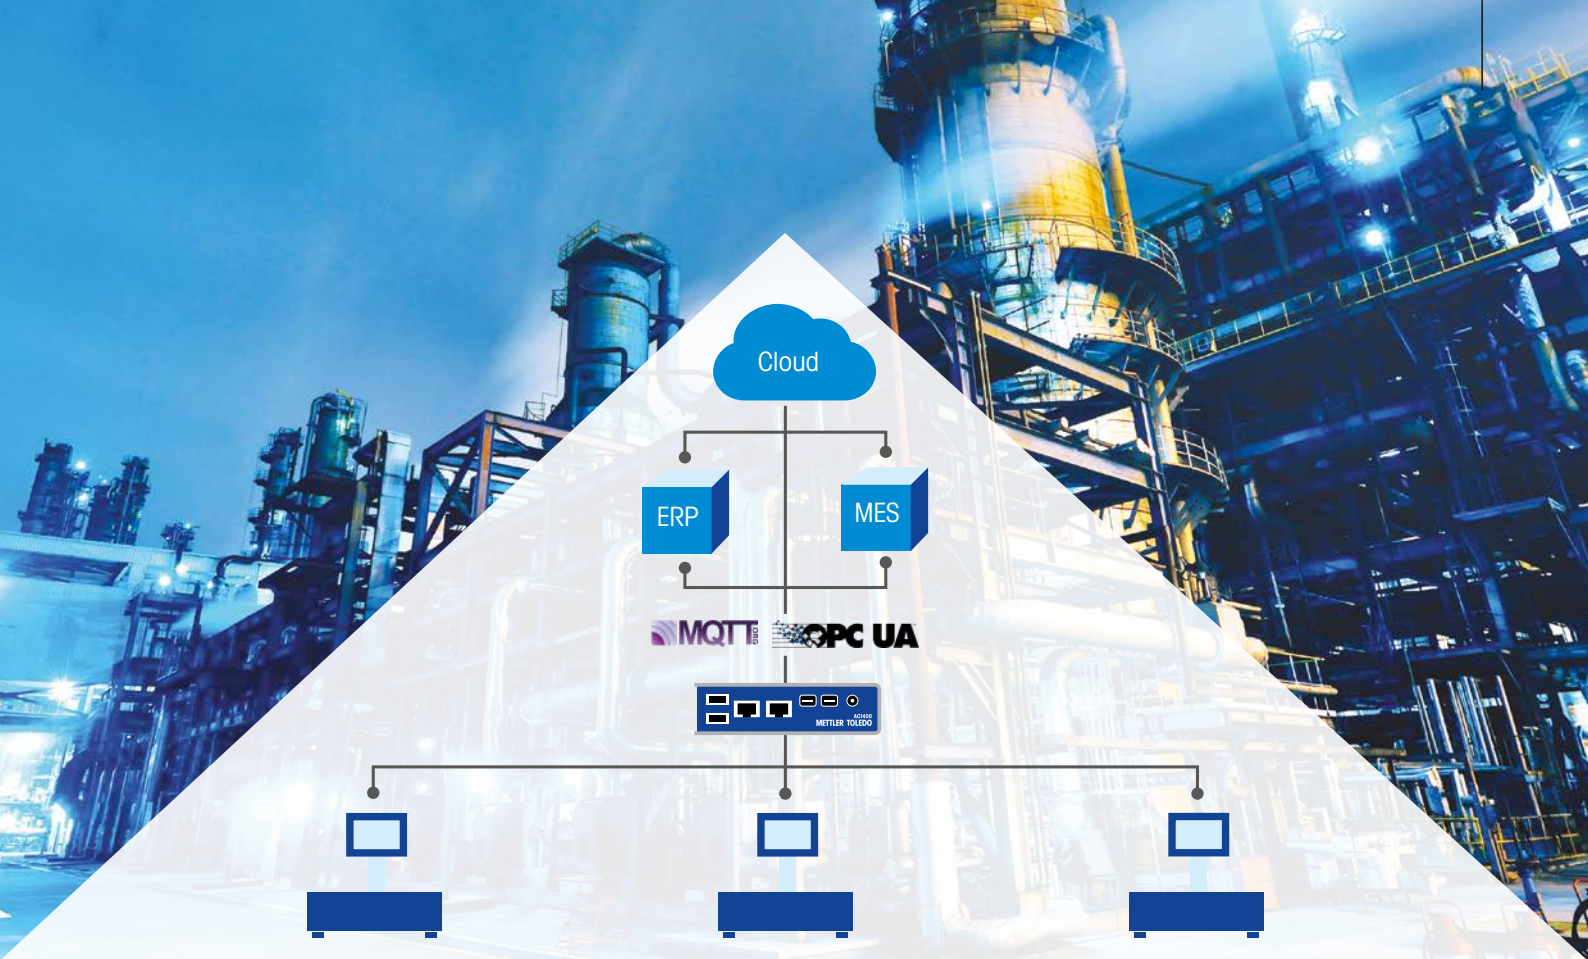


Smart IIoT Connectivity


The ACI400 IIoT Edge from METTLER TOLEDO includes an OPC UA server and MQTT clients for Microsoft Azure, AWS (Amazon Web Services), IBM and others. These are the most common Industrial communication technologies for Enterprise Resource Planning (ERP), Manufacturing Execution Systems (MES), and Industrial Internet of Things communication (IIoT) for Industry 4.0 applications. The ACI400 IIoT Edge device helps ensure seamless and secure data integration with your IT ecosystem.

Each ACI400 IIoT Edge can connect up to four weighing devices. Building on weighing device communication protocols that have been in use by METTLER TOLEDO for decades, the ACI400 IIoT Edge can also connect to older weighing devices, extending their life cycle and saving existing investments from early write-off.



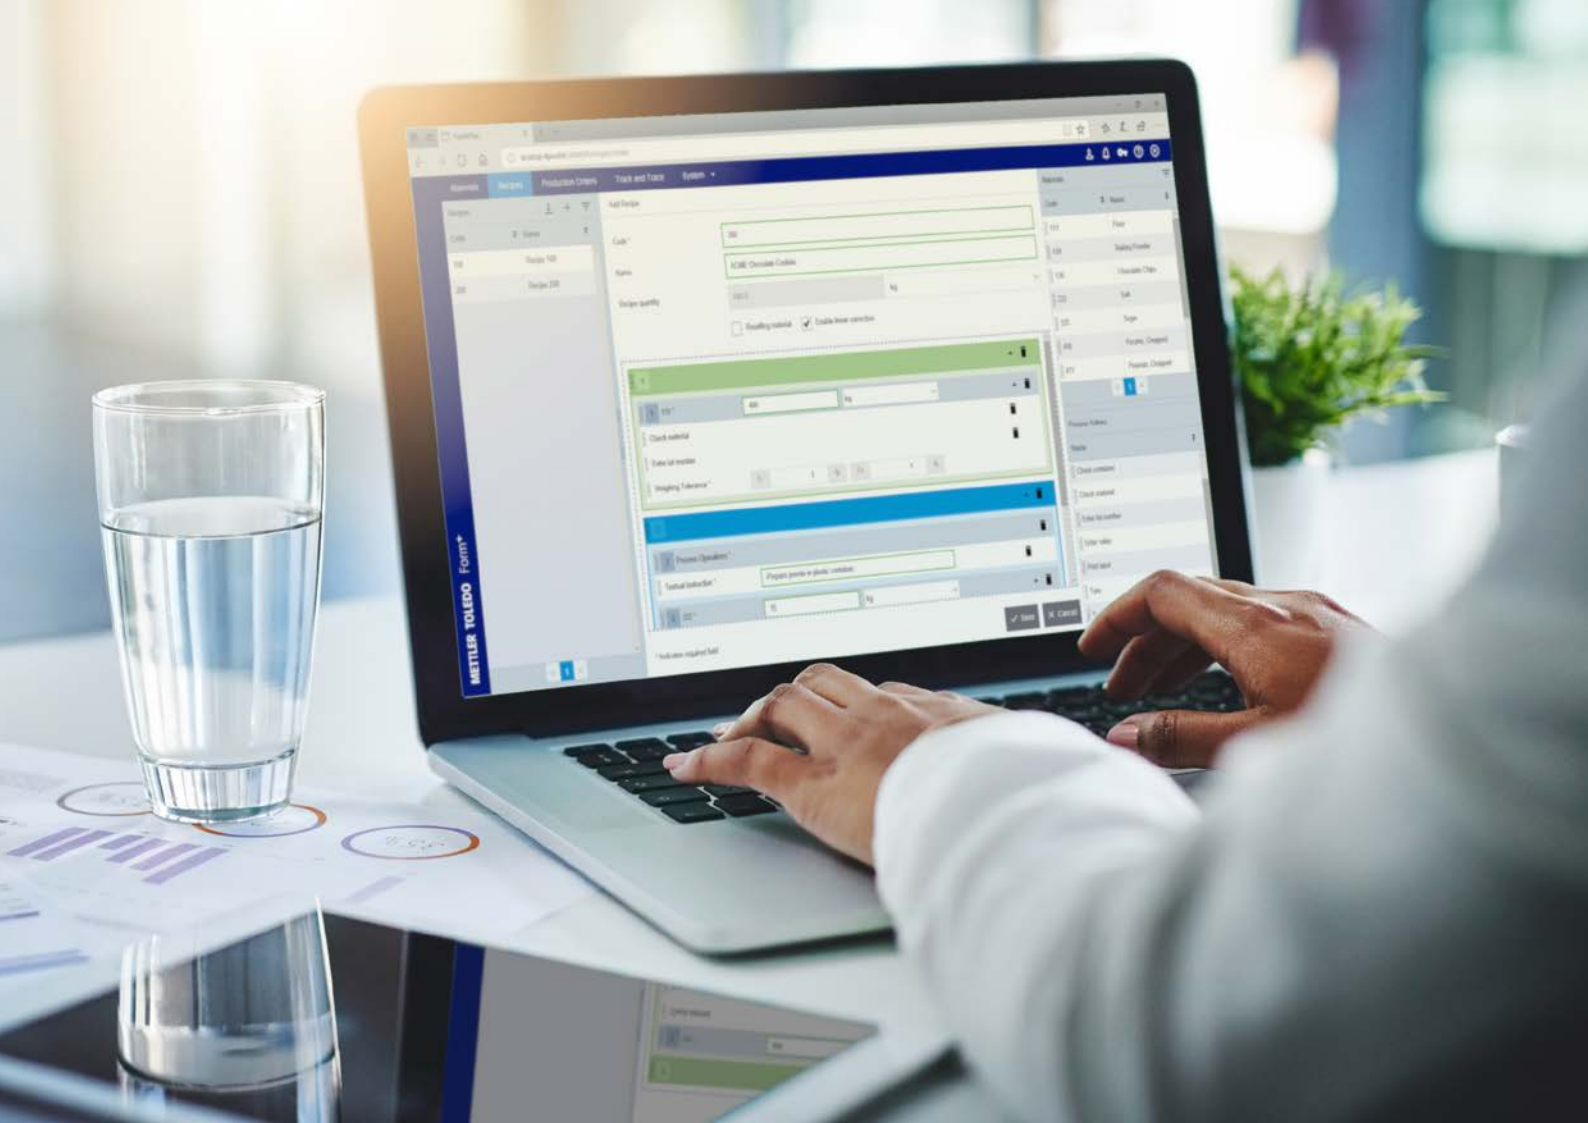

Our Solutions To Manage Your Production

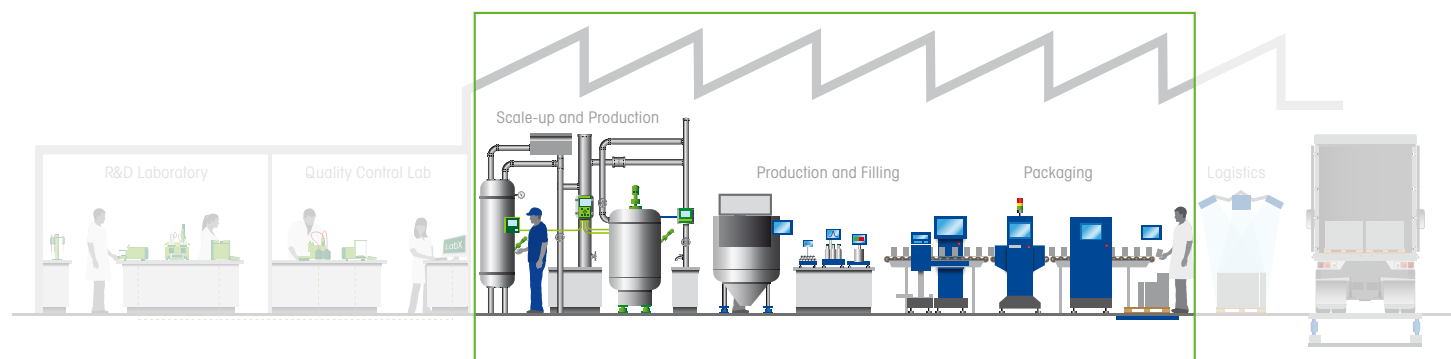

Software Solutions for Data Management

Operational Excellence Through Analysis 58

Data+ Data Management Software

Streamline Your Data 60

Formulation and Recipe Management

Perfect Products Every Time 62

Dispensing and Formulation System

Process Guidance for Consistent Quality 64

Data Collection and Monitoring

Solid Support for Business Decisions 66

Statistical Quality and Process Control

Legal Compliance and Productivity 68

Standalone Statistical Quality Control

Ensure High-Quality Production 70

► **Software for Vehicle Scales** – For More Information, See Page

250

Software Solutions for Data Management


Operational Excellence through Analysis

When operational excellence is your goal, data is everything. Our software solutions automatically and securely collect production data from the shop floor through to your entire value chain. Analyzing that data allows you to make informed decisions that can ultimately impact business results.

► www.mt.com/ind-software

Data Storage and Representation

Collected data must be archived in a central location. Our software allows you to retrieve the data for analysis. Use dashboards, standard software reporting tools or Excel to get insight into your production process. Drill-down functionalities are available to provide you with detailed information.

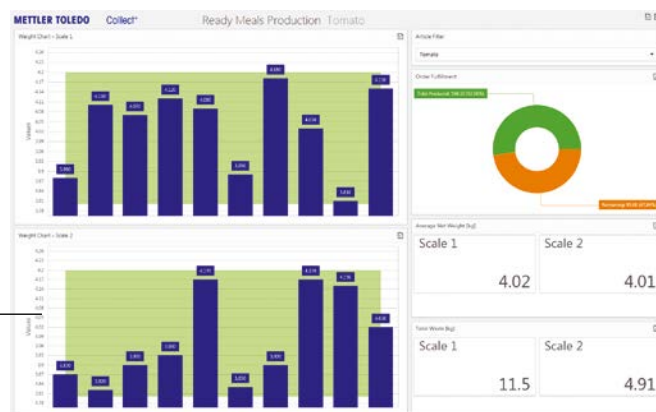

Formulation Recipe Management

Eliminieren Sie Bedienfehler und Materialverschwendung und erzielen Sie eine bessere Vorhersehbarkeit und Rentabilität. Stellen Sie eine konstante und qualitativ hochwertige Produktqualität sicher durch geeignete Datenverarbeitung.



Statistical Quality and Process Control

Comply with legal requirements by archiving sample-based production parameters in a centralized database. Create and analyze statistics for productivity improvements.



A New Perspective

Erstellen Sie eine grafische Ansicht Ihrer Prozessdaten. Sie können sich Daten auf zwei verschiedene Weisen aneignen, um Ihre Ergebnisse auf leicht verständliche Weise zu sehen und bewusste Entscheidungen zu treffen.



The Power of Integrated Software Solutions

Achieve High-Quality Results and Productivity Improvements!

Make use of various production data sources while complying with legal demands and international standards.

Data Management	Collect, archive, maintain and manage data in a central location.
Data Integration	Use process-data information in multiple departments and for different roles to better understand and improve your value chain.
Production Process Analysis	Understand production process deviations and make relevant changes by analyzing data to build key performance indicators.
Plant-Wide Optimization	Compare results with other divisions and sites to improve the entire business.
Documentation	Automatically collect data and avoid costly manual collection. Store data electronically to ensure consistent documentation of all production process data.
Audit	Use current and historical data to deliver evidence of proper production according to international standards and legislations.
21 CFR Part 11	Software solutions also can be introduced into validated environments that comply with international standards.
More Information	www.mt.com/ind-software



Data+ Data Management Software

Streamline Your Data

Don't let software limit your capabilities, streamline your data management with a single software that can store, control and amend up to 30,000 records from your desk. Data+ allows you to spend your time on more valuable workflows instead of wasting time on manual tasks.

► www.mt.com/DataPlus


Up to 20X Faster Processing

Eliminate the need to enter data manually on a scale indicator and directly enter data on a PC. By streamlining this process, you reduce effort and increase processing speed up to 20X.




Up to 15% Faster Reporting

React faster with a user-friendly reporting structure, reducing your time spent generating reports and allowing for faster reaction time.

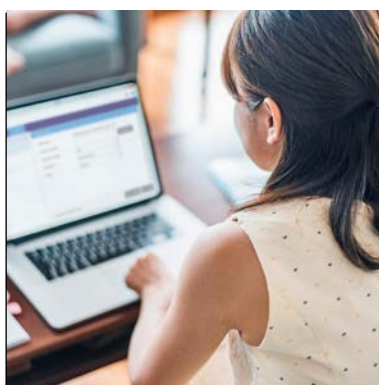


Up to 50% Faster Workflows

Increase process efficiency by downloading scale indicator parameters, article databases and other important metrics to your scale directly from your PC. This centralized setup helps to eliminate redundancies in your process.

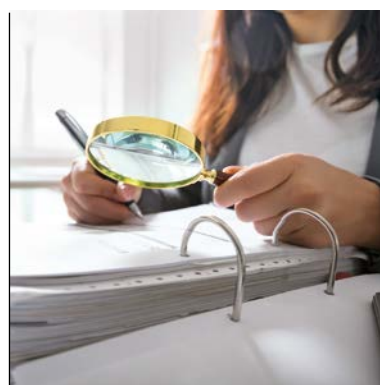

Trouble-Free Audits

Use Data+ across multiple machines to improve consistency in processing and reporting. Achieve consistent quality that is reliable and easily traceable, especially during an audit.

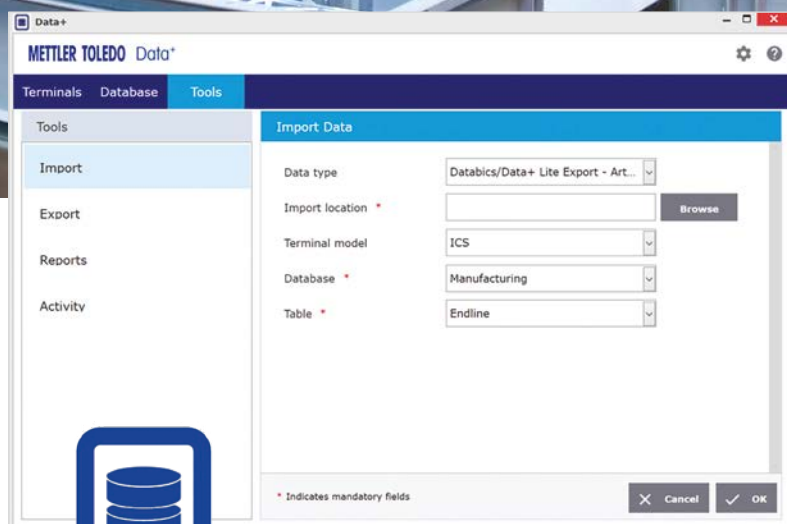

Streamline Your Data Management

Support Both Your IND and ICS Devices

Benefit from one tool that supports data management for all of your applications on IND and ICS scale indicators. This includes checkweighing, counting, material transfer, filling, formulation, drive and packing bill of materials.

Number of Defined Scale Indicators	Unlimited
Backup and Restore Scale Indicator Configuration	Uptime and cloning
Retrieve Alibi Transaction Logs	Export for traceability
Article Material Table Records	Over 30,000
Remote Host Article Database	Up to 99 ICS68_
Import Export Table Records	Host ERP/MES data exchange
SQL Database Local or Remote	Enterprise enabled



Formulation and Recipe Management

Perfect Batches Every Time

Form+ Formulation and Recipe Management System helps you get the most out of your product manufacturing processes. This smart solution has the power that you demand with the simplicity and ease of use that you appreciate.

► www.mt.com/FormPlus

Prevent Human Errors

Clear operator guidance and intelligent workflows tailored specifically to the production process help to minimize errors and reduce the need for retraining operators.




Protect company secrets

Confidential Mode allows to protect producers against losing their competitive advantage, by keeping recipe a secret, so operators can't see product ingredients nor their amount.



Multiple Workstations Maximize Production

Keep the weighing process under control, even when multiple operators work on the same batch in parallel on IND900 terminal, PC or tablet.

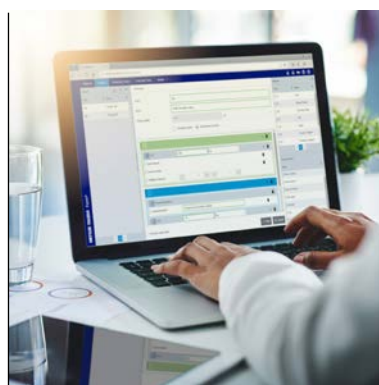

User-Friendly Design

Form+ enables the management of recipes, batches and other production activities from an easy-to-use web interface with complete system control from anywhere in the plant.



Form+ System

Formulation and Recipe Management

Discover this complete recipe management system which provides batch repeatability and full traceability for food and chemical manufacturers.

Perfect Batches Every Time	Eliminate unnecessary waste from bad batches by preventing human errors in your formulation process. Saves production time and material cost, by controlling material weighing tolerances and supporting multi-workstation parallel processing. Overall waste is reduced, productivity is maximized, and the need for costly rework is avoided.
Boost Operator Efficiency	Form+ provides tailored workflows with clear operator guidance resulting in shortening of the operator training time, consistent and repeatable product quality in every batch. Efficiency increase is supported by functionalities like automatic tare and auto-acceptance within tolerances, negative weighing or pre-tare.
Seamless Traceability and Regulatory Compliance	Every operator action is recorded and complete batch evidence documentation is easily reportable providing compliance with quality regulations and audit-proof documentation. Furthermore, GWP Verification function allows weighing risks to be minimized, while maximizing weighing quality, that results in elimination of a failure costs in the production processes.
Allergen and Hazardous Material Management	Identification, handling and processing of allergen and hazardous materials is critical to avoid mistakes and protect employee and company safety. Form+ provides clear guidance for identification and monitoring of these materials to prevent accidental cross-contamination.
Integrate with ERP or MES Systems via Smart API	Import and export master data with easy-to-use manual file exchange and an API option which allows connectivity with external systems.
More Information	www.mt.com/FormPlus



Dispensing and Formulation System

Process Guidance for Consistent Quality

FormWeigh.Net® software for recipe management and material dispensing provides intuitive guidance for production processes in pharma and other regulated industries. It allows you to optimize your manufacturing process by eliminating operator error and material waste for greater predictability and profitability.

► www.mt.com/FormWeighNet

Take Control of Your Processes

Each process step is displayed for the operator in easy-to-understand screens. Quality checks are enforced at weighing stations. Automatic scale selection provides assurance that the operator cannot make a mistake.




Reliable, Traceable Results

Electronically document your processes and results on a centralized database without compromising your flexibility. Take control of your workflows to see which orders are completed, in progress or awaiting processing.



Increase Production Yield

Powerful functions, such as FEFO (First Expire – First Out), allow you to fully utilize your materials and reduce waste. This helps make your production more cost-effective and environmentally friendly.

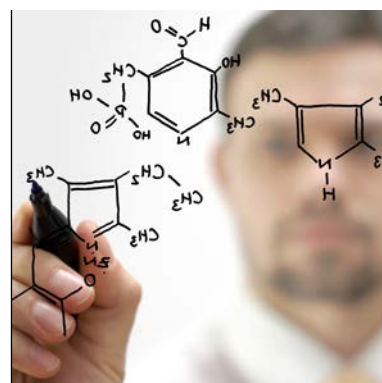

Simplify Your Tasks

FormWeigh.Net for dispensing and formulation is designed to simplify your complex and demanding formulation needs. An intuitive formulation process ensures stable product quality from batch to batch.



Ensure Consistency

Automated Batch Evidence Reporting

Master Data Management	Monitoring and reporting keep materials and processes under control. Allows fast access to crucial control functions so you can easily manage materials, instructions, recipes, orders, history, label reprints, reports and users.
Advanced Stock Management	Optimized material picking – according to FEFO principle (First Expire – First Out).
Textual Instructions	Increased operator efficiency by guidance through reliable and documented process steps. Release personnel from countercheck principles and assign parallel tasks.
Reporting	Use a set of standard reports including weighing, manufacturing, exception, order, consumption or materials list. Tailor your custom reports to your corporate design guidelines.
Hazardous environment capable	Network scale connection over TCP/IP provides possibility of wireless (Wi-Fi) connectivity between Master Station, Weighing Client and Weighing platform. System layout becomes easier than before, implying reduction of cables and unnecessary equipment.
21 CFR Part 11 Ready	Ensure FDA compliance and electronic documentation.
ERP Data Integration	Seamless online data management. Exchange production data with ERP systems to prevent errors and data redundancy.
System Setup	Network solution with MS Windows operating system and MSSQL Database.
More Information	www.mt.com/FormWeighNet



Data Collection and Monitoring

Solid Support for Business Decisions

Collect+™ data collection and visualization software brings a new perspective to your processes. It graphically represents trends, offering the transparent operational views necessary to maintain high-quality, profitable manufacturing.

► www.mt.com/collectplus

Intelligent Data Capture

Efficiently store all measurement values centrally. Easily export raw data to other systems in your plant, including Microsoft® Excel®, via the web-based interface.



Remote Monitoring Display

View material levels in remote silo farms or track environmental factors, such as temperature and pressure. Specify how often the measurement should be checked and see the dashboard update automatically.



Monitor Product Quality

Display your key performance indicators in helpful dashboards to observe trends and highlight deviations. Ensure the quality of your product by taking corrective action before failures occur.



Track Production Efficiency

Estimate process performance by work station on a timely basis or analyze total throughput. Predict how many parts will be completed within a specific timeframe to better allocate resources.



Collect+™ Data Collection

Link Your Scales to Your Business

Represent process trends and key performance indicators graphically to support sound decision-making and maintain quality and profitability.

Data Collection	Collect process data from many types of devices, including scale indicators and other sensors. Retrieve data via RS232 or Ethernet TCP/IP connections.
Graphical Visualization	Easily analyze current production status using dynamic and engaging dashboards. View dashboards from anywhere in your plant, even on tablets.
Knowledge Sharing	Share web-based dashboard links with others so they can view on their PCs. Save data as CSV files and dashboards as PDF files for archiving. Export data to Microsoft Excel for advanced analysis or transfer to other systems.
System Requirements	Microsoft® Windows® 7 SP1 Microsoft® Windows® 10 (Professional, Enterprise) Microsoft® Windows® Server 2012 R2 avec mise à jour (Standard, Datacenter) Windows® Server 2016; Windows® Server 2019 Processeur double cœur 2 GHz, 4 Go de RAM, espace disque disponible de 200 Go
Web Browser Support	MS Internet Explorer 11, MS Edge, Google Chrome 35 and higher, Mozilla Firefox 30 and higher, Apple Safari for iOS 7 and higher
Database Support	Microsoft® SQL Server® 2019 / 2017 / 2016 SP2 / 2014 SP3 / 2012 SP4 Windows® 7 non pris en charge
Device Compatibility	Compatible with METTLER TOLEDO scale indicators, and many other devices with data output
System Setup	Standalone or network
More Information	www.mt.com/collectplus



Statistical Quality and Process Control

Legal Compliance and Productivity

FreeWeigh.Net™ for quality and process control is a fully networked, comprehensive PC software system that helps you comply with legal requirements by documenting and archiving sample-based production parameters in a centralized database. Furthermore, it helps you optimize filling processes and reduce overfills to enhance productivity and maximize revenue.

► www.mt.com/FreeWeigh

Thanks to breakthrough Mobile Test Place and Mobile Monitoring functionality, FreeWeigh.Net™ paves the way for significant IT infrastructure savings and productivity improvements, while both mobile web-base modules make system installation and maintenance effortless.



Connectivity and Data Export

Connectivity is key to thorough and complete process control. Connect FreeWeigh.Net™ to static scales, checkweighers, metal detectors and tablet testers, as well as any third-party devices, PLCs or higher software systems.



Control Beyond Weight

Check attributes of any visual control or automated non-weight data, such as torque, density and much more, to complete your statistic. Create your own test plans and calculate your KPIs.



21 CFR Part 11 Compliance

The system helps to ensure compliance for FDA-regulated industries. Perform system validation and make use of audit trail and electronic signature documentation.



Quality and Filling-Cost Control

Control Your Process, Enhance Productivity

Use weight statistics to control your filling process and comply with legal requirements.

Batch Management	Manage batch data. Create batch reports and release batches.
Multi-component Weighing	Weigh and control multiple components constituting one product.
Multi-head Statistic Control	Ensure quality per filling head or see the mean value of a set of multiple filling heads.
Attribute Control and Test Plan	Simultaneously check non-weighing data, such as visual control, to achieve a comprehensive test plan for consistent documentation. This includes connectivity to third-party devices.
Statistical Process Control (SPC)	Recognize process deviations immediately through underlying defined rules.
Formula Editor for Customized KPI	Define and create your own key performance indicators to optimize reporting and decision-making.
21 CFR Part 11 Ready	Ensure validation in a regulated environment.
System Setup	Operate this solution as stand-alone system or as part of a network application.
More Information	www.mt.com/FreeWeigh



Standalone Statistical Quality Control


Ensure High-Quality Production

Statistical quality control (SQC) is an important production aid to ensure consistent quality throughout your process by controlling variables, such as weight. With the IND930SQC scale indicator, all basic control-system requirements are met with a fast, easy-to-operate and reliable standalone solution. You gain an intuitive interface to fine-tune production in the easiest way possible.

► www.mt.com/IND930SQC


Constant Control

A big touchscreen with an intuitive menu guides the operator through the predefined product sample test sequence. Integrated tolerance systems support you in your efforts to comply with national and international net-content legislation and global standards.

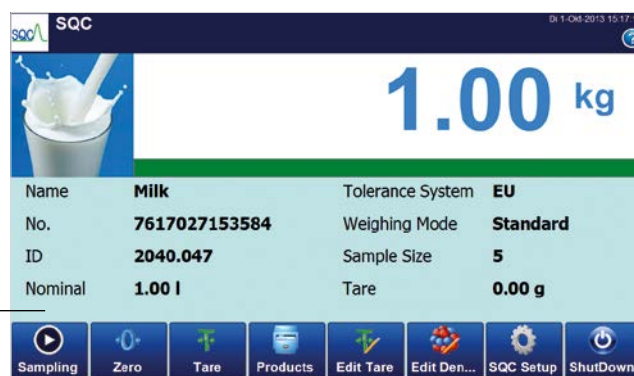


Ready for Harsh Environments

The scale indicator is designed for hygienically sensitive environments. It comes marked IP69K, making it suitable for high-pressure, high-temperature wash-down applications.

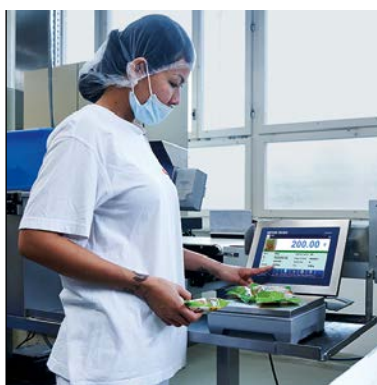

Ease of Use

The system provides pre-configured information so operators can configure it in just a few steps. It is user-friendly and easy to set up and operate.

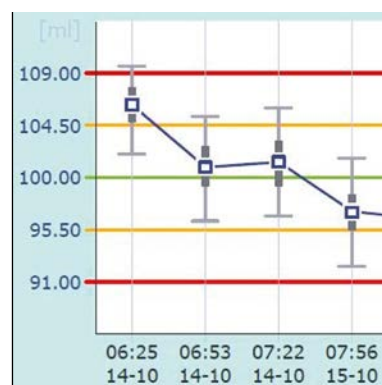

All-in-One Quality Assurance

IND930SQC is a powerful and efficient SQC tool. Receive meaningful results of random sampling from useful, easy-to-understand reports. Benefit from basic SPC functionality.



Standalone SQC

Reliable Information for Quality Assurance


Collect, calculate and report information that allows operators to react immediately if a violation occurs.

Touchscreen Interface	Standard on all models at 10" size, measured diagonally.
Environmental Protection	IP69K compliant, suitable for harsh industrial environments. Stainless housing with Ra<0.8µm surface finish.
Data Storage	Internal compact flash storage memory standard in all models.
Connectivity	Ethernet connectivity standard for integration into industrial networks. Select and install up to six interfaces including scales, USB and serial (RS-232) for connection to PCs, printers and bar-code readers.
Regulatory Compliance	Choose from several different tolerance systems for effortless regulatory compliance.
Flexible Reporting and Archiving	Export reports to a memory stick or a network-accessible server folder.
Operation	Enter product information quickly and accurately using the touchscreen HMI. An information line messages the operator if a sample series or statistic has passed or failed.
More Information	www.mt.com/IND930SQC





Our Solutions For Your Production

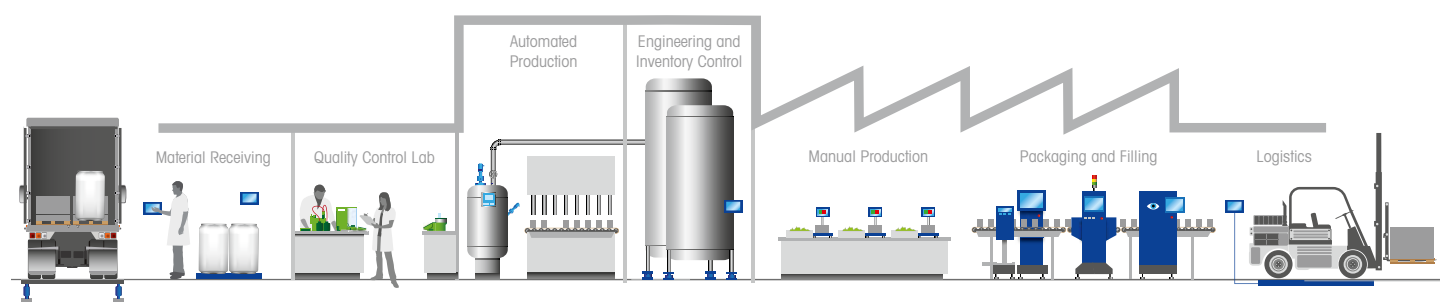

Bench Scales and Platforms

For Wet and Harsh Environments 74

Bench Scales – Compare the Models 76

ICS689, ICS 4_9 – Where Hygiene Counts 78

BBA236 – Durable, Reliable, Economical 82

ICS226 – Mobile, Ergonomic, Compact 84

BPA121 – For Wet and Harsh Environments 86

Hazardous Area Approved Bench Scales – Compare the Models 88

ICS4_6x – Safe and Precise 90

BBA256x – Economic and Safe 92

Bench Platforms – Compare the Models 94

PBK989 – For Precision in Any Environment 96

PBD769 – Save Space and Optimize Your Process 98

PBD659/PBA639 – Cleaning and Compliance Made Easy 100

PBA436/PBA439 – Durable, Easy-to-Clean Design 102

Bench Scales and Platforms

For Dry and Dusty Environments 104

InVision™ – The Smart Way to Ensure Quality 106

Bench Scales – Compare the Models 108

ICS685, ICS4_5 – When Productivity and Flexibility Count 110

BBA231 – Fast, Versatile, Economical 114

ICS241 – Convenient, Smart, Efficient 116

Bench Platforms – Compare the Models 118

PBK987 – For Precision in Dry Environments 120

PBA757 – Precise Static and Dynamic Weighing 122

PBD655 and PBA655(x) – For Reliability in Dry Environments 124

► **For Compatible Scale Indicators** – See Our Scale Indicator Portfolio on Page 20

Scales and Platforms


For Wet and Harsh Environments

Stainless-steel scales and platforms are designed for easy and fast cleaning with IP protections up to IP69k. They are fit for heavy wash-down applications and hygienically sensitive processes and can be used in a broad range of applications from checkweighing and portioning to counting. Choose the one that meets your process needs, whether you work with food, pharmaceuticals, or chemicals.

► www.mt.com/bench-scales

Wherever product integrity matters, colorWeight® checkweighing can be used as a fast and cost-effective quality assurance method. Our scales provide clear information as to whether quality specifications are met and a product is safe for further processing.

colorWeight®



Premium and Advanced

Provide checkweighing, formulation and classifying in hygienically sensitive areas. Benefit from full-graphic display technology, an alphanumeric keypad and multiple interfaces.



Industrial Basics

Industrial Basic Scales feature quality scales at attractive prices. They are suitable for basic food, chemical or manufacturing applications in dry and wet environments.



Weighing Platforms

Solutions are available from 0.6 to 600 kg and thanks to innovative measuring technology, accuracies as low as 1 mg can be reached.



Built for Efficient Cleaning

IP69K-protected scale indicators and hermetically sealed load cells, engineered in conjunction with platform designs conforming to the latest hygienic guidelines, enable easy access to all scale areas for efficient and easy cleaning.

- Stainless-steel construction
- No open threads
- Smooth surface finish
- Minimized horizontal surfaces
- Full-penetration welding





Bench Scales for Wet Environments

Comparison of Standard Configurations

Scales with ingress protection up to IP69k are designed for demanding weighing tasks in harsh and hygienically sensitive environments.

► www.mt.com/bench-scales

	ICS689 Premium bench scale for demanding applications 		ICS4_9 (ICS469 / ICS449 / ICS439 / ICS429) Bench scale for advanced applications 	
Applications	<ul style="list-style-type: none"> • Intuitive checkweighing and portioning • Basic filling and formulation • Fast classifying and average weighing 		<ul style="list-style-type: none"> • Advanced checkweighing and portioning • Accurate counting and totalizing • Fast average weighing 	
Accuracy	★★★★☆	High precision	★★★☆☆	Standard precision
Versatility	★★★★★	10 capacities, 7 sizes	★★★☆☆	10 capacities, 7 sizes
Process Integration	★★★★★	Up to 4 scales and 4 data interfaces	★★★☆☆	Up to 2 scales and 2 data interfaces
Data Management	★★★★★	Database stores up to 5,000 articles	★★★☆☆	Database stores up to 100 articles
Compliance Support	★★★★★	Alibi memory and hygienic design for easy cleaning	★★★☆☆	Alibi memory and hygienic design for easy cleaning
Display	Color TFT (320 x 240) with 3 display layouts, colorWeight® functionality		Graphic LCD display with 3 display layouts, colorWeight® functionality	
Interfaces	RS232, RS422/485, USB, Ethernet, WLAN, digital I/O (4 in- and 4 outputs)		RS232, RS422/485, USB, Ethernet, digital I/O (4 in- and 4 outputs)	
Resolution (depending on platform)	Approvable: 6,000e OIML Class III Recommended (max.): $\leq 60,000d$		Approvable: 6,000e OIML Class III Recommended (max.): $\leq 60,000d$	
Capacity Range	0.6 kg up to 600 kg		0.6 kg up to 600 kg	
Platform Sizes (mm)	228 x 228 up to 600 x 800		228 x 228 up to 600 x 800	
Ingress Protection	Scale: IP68/IP69k		Scale: IP68/IP69k	
Approvals, Certificates	OIML, NTEP, CE, CSA, GMP		OIML, NTEP, CE, CSA, GMP	
More Information	See page 78 or www.mt.com/ICS689		See page 80 or www.mt.com/ICS469	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ★☆☆☆☆ none



Data+ – Data Management Software Solution

Eliminate the need to enter data manually on a scale indicator and skip directly to entering data on a PC. By streamlining this process you save effort and increase processing speed up to 20x.

► www.mt.com/Dataplus

BBA236

Cost-effective bench scale for basic applications



ICS226

Mobile compact scale for basic applications



BPA121

Portable compact scale for wet environments



- Basic weighing and checkweighing
- Counting and totalizing
- Average weighing

- Basic weighing
- Simple checkweighing

- Basic Weighing
- Fast simple checkweighing



Standard precision



Standard precision



Standard precision



10 capacities, 7 sizes



3 capacities, 1 size



4 capacities, 1 size



1 standard & 1 optional interface



1 standard interface



–



–



–



–



Hygienic platform for easy cleaning



–



–

7-segment LCD display with white backlight

7-segment LCD display with white backlight

7-segment LED display x 2

RS232, RS422/485, USB device, digital I/O

RS232

–

Approvable: 3,000e OIML Class III Recommended (max.): $\leq 15,000d$

Approvable: 3,000e OIML Class III Recommended (max.): $\leq 6,000d$

Approvable: 3,000e OIML Class III Recommended (max.): $\leq 6,000d$

3 kg up to 600 kg

3 kg up to 15 kg

3kg up to 30kg

228 x 228 up to 600 x 800

228 x 228

182 x 226

Scale Indicator: IP66/IP67
Platform: IP65

Scale Indicator: IP67
Platform: IP65

Scale: IP68 / 69K

OIML, NTEP, CE, UL

OIML, NTEP, CE, UL

OIML, CE

See page 82 or
www.mt.com/BBA236

See page 84 or
www.mt.com/ICS226

See page 86 or
www.mt.com/BPA121


ICS Bench Scale Series

Where Hygiene Counts

The ICS689, ICS469, ICS449, ICS439 and ICS429 bench and compact scales series can be used for a variety of applications, including over/under checkweighing, counting, classifying, filling, formulation and many more. The full stainless-steel design makes it best suited for wet, harsh or hygienic environments especially in the food, pharmaceutical or chemical industries.

► www.mt.com/bench-scales

The ICS product family supports fast and efficient portioning and classifying processes. Whether filling small containers placed on the platform, or using the powerful takeaway mode for filling without a keystroke, ICS scales help to speed up productivity by as much as 20%. With SpeedWeigh™, yield can be increased by up to 30%.

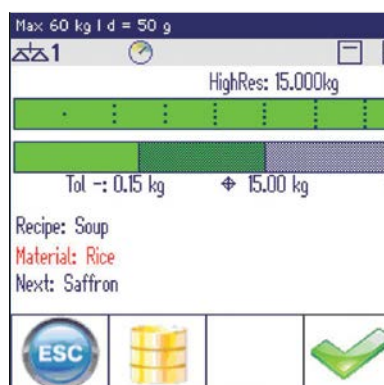

Formulation and SpeedWeigh Speed Up Workflows

The formulation application guides operators through recipes intuitively. SpeedWeigh optimizes the accuracy and speed for each ingredient enhancing error-free formulation.



colorWeight®

Speeds Up Production
Save time and money with the smart colored display that makes weighing applications faster and less error-prone.



Mobile Operation for the Flex- ibility of Your Processes

An optional WLAN interface and long-lasting Li-Ion battery pack allows flexible operation anywhere in the facility.



Hygienic Design for Sanitary Environments

From occasionally wet to harsh washdown conditions, these scales can take it. The stainless-steel platforms and scale indicators of the ICS6 and ICS4 series provide a flexible and rugged solution for a wide range of weighing tasks. All parts have been engineered and manufactured according to the latest hygienic-design guidelines, resulting in a construction without closed cavities or sharp edges and minimized horizontal surfaces. This allows easy, fast and efficient cleaning.






Connect your scale via Ethernet, WLAN or USB for easy data-transfer. Add a barcode reader or other peripheral for secure material identification.



Your Customized Solution Wet and Harsh Environments

The ICS4_9 and ICS689 compact systems are the perfect solution for any application in wet and harsh environment. The rugged stainless steel design of all indicators and platforms with high ingress protection guarantees long lifetime and allows frequent and intensive cleaning.

1 Choose an Application / Indicator

					
Model	ICS429	ICS439	ICS449	ICS469	ICS689
Applications	• Basic Weighing	• Basic Weighing	• Basic Weighing • Counting • Over/Under Checkweighing	• Basic Weighing • Counting • Over/Under Checkweighing	• Basic Weighing • Counting • Over/Under Checkweighing • Filling/Dosing • Classifying • Formulation • SpeedWeigh • Pick&Pack
Color TFT display					•
colorWeight®			•	•	•
Five configurable soft keys			•	•	•
Numeric (n) / alphanumeric (a) keypad		n		n	a
Additional interface options	1	1	1	1	3
Attachable platforms	1	1	2*	2*	4**

* Connection of a second scale to ICS449 and ICS469 is limited to SICSpro- or SICS-interface

** Maximum 2 analog, or 2 IDNet platforms respectively 1 analog plus 1 IDNet

General Specifications

Resolution for analog platforms***	Up to OIML 2x3,000e/ NTEP 5,000d
Display	ICS4_9: LCD liquid crystal graphical display with backlighting ICS689: Color TFT display 320 x 240 pixels
Keypad	ICS4_9: Tactile-touch membrane keypad (PET), scratch-resistant material ICS689: Piezo keypad scratch-resistant material
Housing	Stainless steel 1.4301, AISI 304
Protection	Up to IP69k
Power	100–240 VAC; optional battery 12 V/2.5 A
Standard Interfaces	1 RS232

*** for digital platforms, the resolution is defined by the respective platform

2 Interface Options / Accessories

Optional Data Interfaces	RS232, RS422/485, USB device/host, Ethernet, Digital I/O (4 Inputs + 4 Outputs)
Optional Scale Interfaces	digital SICSpro, digital IDNet, analog (max. 2 analog, or 2 IDNet resp. 1 analog + 1 IDNet)
Accessories	Choose from various accessories such as wall bracket, columns/stands, roller tops, printers, battery packs, relays for digital I/O, barcode scanners and much more

3 Combine with the best fit platform for wet and harsh environments

Modular Solutions, ICS429/439/449/469 and ICS689 Combi Bench Scales

Platform Size	3 kg	6 kg	12 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg	600 kg
QA 228 x 228 [mm]	•	•								
A 240 x 300 [mm]	•	•	•	•						
QB 305 x 305 [mm]			•	•	•	•				
BB 300 x 400 [mm]					•	•				
B 400 x 500 [mm]					•	•	•	•		
BC 500 x 650 [mm]						•	•	•	•	
CC 600 x 800 [mm]						•	•	•	•	•

PBD659	3 kg	6 kg	12 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg	600 kg
Approved readability (6,000e)	0.5 g	1 g	2 g	n/a	5 g	10 g	20 g	n/a	50 g	200 g*
Recommended readability at max. resolution (60,000d)	0.05 g	0.1 g	0.2 g	n/a	0.5 g	1 g	2 g	n/a	5 g	10 g
Ingress Protection	IP68/IP69k									

PBA639	3 kg	6 kg	12 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg	600 kg
Approved readability (3,000e)	1 g	2 g	n/a	5 g	10 g	20 g	n/a	50 g	100 g	200 g
Approved readability (2x3,000e)	n/a	1/2 g	n/a	2/5 g	5/10 g	10/20 g	n/a	20/50 g	50/100 g	100/200 g
Recommended readability at max. resolution (30,000d)	0.1 g	0.2 g	n/a	0.5 g	1 g	2 g	n/a	5 g	10 g	20 g
Ingress Protection	IP68/IP69k									

PBA439**	3 kg	6 kg	12 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg	600 kg
Approved readability (3,000e)	1 g	2 g	n/a	5 g	10 g	20 g	n/a	50 g	100 g	200 g
Recommended readability at max. resolution (15,000d)	0.2	0.5	n/a	1	2	5	n/a	10	20	50
Ingress Protection	IP68/IP69k									

PBA436**	3 kg	6 kg	12 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg	600 kg
Approved readability (3,000e)	1 g	2 g	n/a	5 g	10 g	20 g	n/a	50 g	100 g	200 g
Approved readability (2x3,000e)	n/a	1/2 g	n/a	2/5 g	5/10 g	10/20 g	n/a	20/50 g	50/100 g	100/200 g
Recommended readability at max. resolution (15,000d)	0.2	0.5	n/a	1	2	5	n/a	10	20	50
Ingress Protection	IP65									

*3,000e / **Only for ICS4x9 Combi Bench Scales

High Precision, Bundle ICS Indicators with PBK989

PBK9 Series										
Platform Size (Load Plate Size)	0.6 kg	3 kg	6 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg	600 kg
XS 210x250 (130x160 mm)	•									
A 275x345 (240x300 mm)		•	•							
AB 280x350 mm				•	•	•				
B 400 x 500 mm						•	•			
CC 600 x 800 mm								•	•	
Approved readability (30,000e)*	0.01 g	0.1 g	0.2 g	0.5 g	1 g	2 g	5 g	5 g	10 g	
Recommended readability at max. resolution (750,000d)*	0.001 g	0.005 g	0.01 g	0.02 g	0.05 g	0.1 g	0.2 g	0.2 g	0.5 g	
Ingress Protection	IP66/IP68									

*max. readability/resolution, other resolutions see datasheet

BBA236 Bench Scale Series

Durable – Reliable – Economical

The BBA236 stainless steel scale is a robust and easy-to-operate all-in-one solution. It is a perfect fit for basic applications in dry and short-time wet industrial environments. The user-friendly scale indicator promotes fast operation and measurably improve production efficiency.

► www.mt.com/BBA236

In addition to five tactile and responsive standard keys, the scale features two freely definable function keys. This allows fast and easy switching between functions and ensures quick set-up and easy use.



Highly Visible Display

For excellent readability under any light condition, the BBA236 scale features a large, 60 mm high LCD display with an adjustable white backlight.



Versatile Usage

The scale includes an RS232 interface, which allows communication with a printer or PC. Its stainless steel enclosure is both stylish and functional.



Rugged and Easy to Clean

The IP65 protected platform, with its open, sturdy and straight-forward design, allows efficient cleaning and helps to reduce possible bacterial contamination.



BBA236 Bench Scales

For a Variety of Applications

Display	7-segment LCD Display							
Material	Scale: stainless steel, AISI304							
Power Supply	85-264 VAC, Optional: Built-in NiMH rechargeable battery pack							
Data Interfaces	RS232 (Standard)							
	Maximum Capacity							
Platform / Load Plate Size	3 kg	6 kg	15 kg	30 kg	60 kg	150 kg	300 kg	600 kg
QA 228 x 228 mm	•	•						
A 240 x 300 mm	•	•	•					
QB 305 x 305 mm			•	•	•			
BB 300 x 400 mm				•	•			
B 400 x 500 mm				•	•	•		
BC 500 x 650 mm					•	•	•	
CC 600 x 800 mm					•	•	•	•
Approved Readability	1 g	2 g	5 g	10 g	20 g	50 g	100 g	200 g
Minimum Capacity	20 g	40 g	100 g	200 g	400 g	1,000 g	2,000 g	4,000 g
Approvable Resolution	OIML Class III, 3,000e							
Recommended Resolution (max.)	15,000d							
More Information	www.mt.com/BBA236							



ICS226 Compact Scale Series

Mobile – Ergonomic – Compact

The ICS226 Compact Scale is a portable scale for weighing and portioning in food production and packaging applications. This full stainless-steel scale is IP65/IP67 protected and a good fit in any light wash-down application with a need for ruggedness and durability.

► www.mt.com/ICS226



Manufacturing Flexibility

Removable handles and a high-quality Ni-MH rechargeable battery make the ICS226 a fully portable and mobile scale for flexible operation everywhere in your facility.



Ergonomic and Rugged Keypad

The high-quality membrane keys and the duplicated Zero/Tare buttons provide long life and convenient operation.



Bright, Easy-Read Display

The ICS226 compact scale includes a large and highly visible LCD display and an intuitive graphic checkweighing scale indicator for easy readability.



ICS226 Compact Scales

For Simple Checkweighing Applications

Display	6 digit LCD Display, with white backlight		
Material	Scale: stainless steel, AISI 304		
Power Supply	100–240 VAC, Rechargeable 6V, Ni-MH battery		
Data Interfaces	RS232 (Standard)		
	Maximum Capacity		
Platform / Load Plate Size	3 kg	6 kg	15 kg
228 x 228 mm	•	•	•
Approvable Readability	1 g	2 g	5 g
Recommended Readability (min.)	0.5 g	1 g	2 g
Approvable Resolution	OIML Class III, 3,000e		
Recommended Resolution (max.)	6,000d		
More Information	www.mt.com/ICS226		



BPA121 Portable Scale

For Wet and Harsh Environments

A compact scale designed specifically for flexible use in food-processing applications, the BPA121 portable bench scale offers reliable protection against humidity and water ingress, making it the right choice for fast, accurate weighing in damp environments.

► www.mt.com/BPA121

The lightweight plastic housing of the BPA121 makes the scale easy to carry with only one hand, enabling quick mobility and simple integration into just about any space and workflow. A stainless steel platter is also available as an accessory.



Flexible Power Supply

With both a power adaptor and a lead-acid rechargeable battery, the standard configuration of this scale enables flexibility in your weighing processes.



Easy to Clean

Equipped with smooth external surfaces and easily removable electronic components, the BPA121 helps to accelerate cleaning procedures so you can maintain excellent hygiene.



Fast and Accurate

With a dual display and a stabilization time of less than 0.6s, the BPA121 enables safe and efficient weighing in your challenging industrial environment.



Hygienic Design

The BPA 121 Product Range




Scale Capacity	3kg	6kg	15kg	30kg
Readability				
3,000e	1 g	2 g	5 g	10 g
6,000d / 7,500d	0.5 g	1 g	2 g	5 g
12,000d / 15,000d	0.2 g	0.5 g	1 g	2 g
30,000d / 37,500d	0.1 g	0.2 g	0.5 g	1 g
Dual Display	6-bit 7-section red LED display			
Platter Size	182 × 226 mm			
Net Weight	2.29 kg (without battery) / 3.24 kg (with battery)			
IP Rating	IP68/69k			



Bench Scales For Hazardous Areas

Platforms for hazardous areas classified as Zone 1/21 and Division 1 enable precise weighing in areas where an explosive atmosphere is likely to occur during normal operation.

► www.mt.com/ind-haz-bench

	ICS466x Bundle Premium bench scale for demanding applications. 		ICS426x Bundle Bench scale for advanced applications. 	
Applications	• Simple weighing and checkweighing • Manual Filling		• Simple weighing	
Accuracy	★★★★★	Highest precision	★★★★★	Highest precision
Versatility	★★★★☆	5 capacities, 2 sizes	★★★☆☆	5 capacities, 2 sizes
Process Integration	★★☆☆☆	Serial data interface to the safe area	★★☆☆☆	Serial data interface to the safe area
Data Management	★★★★☆	Store up to 100 targets with the internal database	★★★★★	–
Compliance Support	★★★★☆	Hazardous area approved; alibi memory, user prompting.	★★★★☆	Hazardous area approved.
Display	Backlit LCD with colorWeight® functionality		Backlit LCD	
Interfaces	1 x standard RS232 and optional 1 x RS232, RS422/485, via current loop connection to ACM200 communication module in the safe area		1 x standard RS232 and optional 1 x RS232, RS422/485, via current loop connection to ACM200 communication module in the safe area	
Resolution (Depending on Platform)	Approvable: $\leq 30,000e$ OIML Class II Recommended (max.): $\leq 750,000d$		Approvable: $\leq 30,000e$ OIML Class II Recommended (max.): $\leq 750,000d$	
Capacity Range	3 kg up to 60 kg		3 kg up to 60 kg	
Platform Sizes (mm)	275 x 345 up to 280 x 350		275 x 345 up to 280 x 350	
Ingress Protection	IP65		IP65	
Approvals, other Certificates	OIML, NTEP		OIML, NTEP	
Hazardous Area Approvals 	IECEx/ATEX (Zone 1/21), NEC (Div. 1 and Zone 1)		IECEx/ATEX (Zone 1/21), NEC (Div. 1 and Zone 1)	
More Information	www.mt.com/ICS466x-series		www.mt.com/ICS426x-series	
Requirement fulfillment scoring: ★★★★★ very good ★★★★★ good ★★★★★ fair ★★★★★ limited ★★★★★ none				



High-Precision Weighing in Hazardous Areas

Watch the video to learn how METTLER TOLEDO platform designs enable the highest precision in hazardous areas, and how they can help you improve your weighing processes to ensure consistent quality along with improved productivity and regulatory compliance.

► www.mt.com/ICS466x-series

BBA256x Bundle

Cost effective bench scale for basic applications.



- Simple weighing and checkweighing

★★★★☆	Standard precision
★★★★☆	6 capacities, 5 sizes
★★★☆☆	Serial data interface to the safe area
★★★★☆	Stored target for checkweighing and tare values
★★★★☆	Hazardous area approved, alibi memory, hygienic design

Backlit LCD

1 x standard RS232 and optional 1 x RS232, RS422/485, via current loop connection to ACM200 communication module in the safe area

Approvable: $\leq 3,000e$ OIML Class III Recommended (max.): $\leq 15,000d$

6 kg up to 60 kg

228 x 228 to 400 x 500

IP66

OIML, NTEP

IECEx/ATEX/NEC (Zone 1/21), NEC (Div. 1)

www.mt.com/BBA256x



ICS4_6x Compact Scales For Safety and Precision

When weighing in hazardous environment you need accuracy and reliability without sacrificing safety. The ICS4_6x-Series is rugged and easy to clean thanks to its stainless steel design makes it best suited for wet, harsh and hazardous environments.

► www.mt.com/ICS426x-series

► www.mt.com/ICS466x-series

The ICS4_6x-Series can easily be installed in different configurations (Front-, Wall-, Column- or Desk-Installation) Benefit: Higher productivity can be achieved by an ergonomic designed working place.



Full Protection

The intrinsically safe product design ensures highest level of safety and compliance with the latest hazardous area requirements in Zone 1/21 or Division 1.



Highest Accuracy

The ICS4_6x-Series enable industry leading accuracy of up to 750,000d in Zone 1/21, Division 1. When tolerances are tight, these scales deliver the precision you need.



Best Usability

An intuitive operating philosophy provides easy and secure handling of even complex weighing tasks in the hazardous area.



ICS4_6x Compact Scales

For Advanced Weighing Applications

Models	ICS426x	ICS466x
Resolution (Approved)	OIML: 100 000e Class II, 10 000e Class III NTEP: 32 000e Class II, 10 000e Class III	
Capacities (kg)	3, 6, 15, 30, 60	
Display	Backlit LCD	Backlit LCD with colorWeight®
Keypad	4 function keys, tactile feel	32 keys, tactile feel, soft keys, numeric keypad
Housing	Stainless steel AISI304	
Interfaces	1 intrinsically safe RS232 optional: 1 RS232 or 1 RS422/485 via ACM200 module	
Power Supply	Either 120V or 230V via APS768x power supply	
Applications	Basic weighing, average weighing	Basic weighing, average weighing, checkweighing, totalizing, manual filling
Special Features		Connect two digital or one digital and one analog platform
More Information	www.mt.com/ICS426x-series	www.mt.com/ICS466x-series



BBA256x Bench Scale Series

For Your Hazardous Environment

Designed to operate safely in environments with explosive gases or dusts, the economical BBA256x carries ATEX, IECEx and FM hazardous-area approvals. The full stainless-steel design is built to deliver reliable performance in most harsh industrial environments.

► www.mt.com/BBA256x

With reliable intrinsically safe technology, the BBA256x bench scale is a safe and versatile weighing solution for any Zone 1/21 and Division 1 environment.



ID Input			
ID1	1001	1001	
ID2	ABCDEF	ABCDEF	
ID3	mnopqr	mnopqr	

Transaction Table Record			
Date	Time	Transaction	N
11-Jul-2018	22:09:11	00000015	0.00
11-Jul-2018	22:09:22	00000016	23.33
11-Jul-2018	22:09:32	00000017	7.22

Store Transaction Data Automatically

The transaction log/alibi function in combination with label printing enhances data traceability.



Durable and Easy-to-Clean

The BBA256x platform features full electro-polished stainless-steel frame design as well as an advanced stainless-steel load cell.



Saving Costs, Reducing Set-Up

Pre-configuration of the full scale and the internal power supply makes field installation easy and fast.



BBA256x Bench Scale

For Simple Weighing Applications



Display	240 x 96 pixel white backlit LCD, 25 mm high digits					
Material	Scale indicator, platform, column: Stainless steel AISI304					
Power Supply	Built-in, 187 VAC to 250 VAC (for ATEX, IECEx only), or connection to METTLER TOLEDO AC power supply or an external battery installed in the hazardous area (for FM version)					
Data Interfaces	1 intrinsically safe RS232 optional: 1 RS232 or 1 RS422/485 via ACM200 module in the safe area					
	Maximum Capacity					
Model / Plattform Size	6 kg	15 kg	30 kg	30 kg	60 kg	150 kg
BBA256x-7QA 228 x 228 mm	3 kg	6 kg				
BBA256x-7A 240 x 300 mm	3 kg	6 kg	15 kg			
BBA256x-7QB 305 x 305 mm			15 kg	30 kg	60 kg	
BBA256x-7BB 300 x 400 mm				30 kg	60 kg	
BBA256x-7B 400 x 500 mm				30 kg	60 kg	150 kg
Approvable resolution Class III single range - 1 x 3,000e						
Approvable readability (e min)	1 g	2 g	5 g	10 g	20 g	50 g
Minimum capacity	20 g	40 g	100 g	200 g	400 g	1,000 g
Approvable Resolution	OIML Class III, 3,000e					
Recommended Resolution	15,000d					
More Information	www.mt.com/BBA256x					






Bench Platforms

For Wet and Harsh Environments

These weighing platforms are designed for demanding weighing tasks in harsh and hygienically sensitive environments.

► www.mt.com/ind-platforms

	PBK9(x) Premium platform for best-in-class performance. 		PBD769 Robust platform with fast and precise results can replace three scales with one. 	
Applications	<ul style="list-style-type: none"> Precision weighing & counting Automated weight determination Pharmaceutical processes 		<ul style="list-style-type: none"> Precise weighing and counting Automated weight determination Formulation and recipe weighing 	
Accuracy	★★★★★	Highest precision	★★★★★	High precision
Versatility	★★★★★	9 capacities, 5 sizes	★★★★☆	6 capacities, 3 sizes
Process Integration	★★★★★	Connects to scale indicator or direct to PLC	★★★☆☆	Digital scale interface for fast system integration
Compliance Support	★★★★★	Hygienic design, hazardous-area approved.	★★★☆☆	Hygienic design
Resolution	Approvable: up to 30,000e OIML Class II Recommended (max.): $\leq 750,000d$		Approvable: 3 x 3,000e MI OIML Class III or 7,500e OIML Class III Recommended (max.): $\leq 150,000d$	
Capacity Range	0.6 kg up to 300 kg		15 up to 300 kg	
Platform Sizes (mm)	210 x 250 up to 600 x 800		280 x 350 up to 600 x 800	
Ingress Protection	IP67/IP68		IP66/IP68	
Weighing Platform Material	Frame: Stainless steel AISI304 Load plate: Stainless steel AISI304 / 316		Frame: Stainless steel AISI304 Load plate: Stainless steel AISI304, brushed, e-polished	
Detailed Product Information	Monobloc technology in stainless-steel housing		Digital load cell in stainless-steel housing	
Approvals, other certificates	OIML, NTEP, GMP, EHEDG		OIML, NTEP	
Hazardous Area Approvals 	IECEx/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)		n/a	
More Information	See page 96 or www.mt.com/PBK9		See Page 98 or www.mt.com/PBD769	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ★☆☆☆☆ none



High Precision in Action

Watch the video to learn how the platform design enables the highest precision in production environments and how this can help you improve your weighing processes and ensure consistent quality, increase productivity and meet regulatory requirements.

► www.mt.com/PBK9

PBD659

Optimized hygienic design with higher accuracy.



PBA639

Optimized hygienic design for wet environments.



PBA439

Durable and economical solution for wet environments.



PBA436

Durable and economical solution for light wet environments.



- Harsh wet-area weighing
- Biotech and hygienic processes
- Formulation and recipe weighing

- Harsh wet-area weighing
- Biotech and hygienic processes
- Formulation and recipe weighing

- Harsh wet-area weighing
- Chemical processes
- Formulation and recipe weighing

- Light wet area weighing
- In-process quality control
- Formulation and recipe weighing

★★★★★

High precision

★★★★☆

Advanced precision

★★★☆☆

Standard precision

★★★★☆

Advanced precision

★★★★★

8 capacities, 7 sizes

★★★★★

8 capacities, 7 sizes

★★★★★

8 capacities, 7 sizes

★★★★★

8 capacities, 7 sizes

★★★★☆

Digital scale interface for fast system integration

★★★★★

–

★★★★★

–

★★★★★

–

★★★☆☆

Hygienic design

★★★★☆

Hygienic design, hazardous-area approved.

★★★☆☆

Hygienic design, hazardous-area approved.

★★★☆☆

Hygienic design

Approvable: 6,000e OIML Class III
Recommended (max.): $\leq 60,000d$

Approvable: 2 x 3,000e OIML Class III
Recommended (max.): $\leq 30,000d$

Approvable: 3,000e OIML Class III
Recommended (max.): $\leq 15,000d$

Approvable: 2 x 3,000e OIML Class III
Recommended (max.): $\leq 15,000d$

3 kg up to 600 kg

3 kg up to 600 kg

3 kg up to 600 kg

3 kg up to 600 kg

228 x 228 up to 600 x 800

228 x 228 up to 600 x 800

228 x 228 up to 600 x 800

228 x 228 up to 600 x 800

IP68/IP69k

IP68/IP69k

IP68/IP69k

IP65

Frame: Stainless steel AISI304
Load plate: Stainless steel AISI304 / 316 e-polished

Frame: Stainless steel AISI304
Load plate: Stainless steel AISI304 / 316 e-polished

Frame: Stainless steel AISI304
Load plate: Stainless steel AISI304 / 316 e-polished

Frame: Stainless steel AISI304
Load plate: Stainless steel AISI304 / 316 e-polished

Stainless steel, hermetically sealed, digital load cell

Stainless steel, hermetically sealed

Stainless steel, hermetically sealed

Aluminum potted

OIML, NTEP, GMP

OIML, NTEP, GMP

OIML, NTEP

OIML, NTEP

n/a

IECEx/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)

IECEx/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)

n/a

See page 100 or
www.mt.com/PBA639-PBD659

See page 100 or
www.mt.com/PBA639-PBD659

See page 102 or
www.mt.com/PBA439

See page 102 or
www.mt.com/PBA436

PBK989 Bench Platform Series

For Precision in Any Environment

For applications that require high reliability with industry leading metrological performance, PBK989 high-precision bench platforms, with resolutions of up to 750,000 divisions, are the right choice. Their unique platform construction makes them suitable for a variety of challenging environments, including areas with high humidity, that need regular cleaning or are classified as hazardous.

► www.mt.com/PBK9

The Monobloc load cell at the core of the PBK9 weighing platform guarantees the highest precision and reliability. The robust load-cell housing features integrated over-load protection and durable mechanical interfaces for many years of intensive use.



Increased Throughput for Fast Processes

Industry-leading stabilization times make the platforms suitable for high-speed weighing processes.



Safe in Hazardous Environments

The platforms are approved for top performance in gaseous, dusty environments – Cat2/Cat3 and Div 2, Div 1.



Direct Connectivity for Safe Processes

PBK9 APW weighing platforms can be directly connected via plug-in cables to many automation control systems.



PBK9 High-Precision Bench Platforms

For Outstanding Accuracy

Smart Platter option
dramatically increases the weighing
accuracy in locations with moving air.

Frame Material	Stainless steel AISI304								
Load Plate Material	Stainless steel AISI304/316; Smart Platter (option for A3/A6)								
Load Cell	Monobloc technology in stainless-steel housing								
	Maximum Capacity								
Platform / Load Plate Size	0.6k g	3 kg	6 kg	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg
XS 210 x 250 / 130 x 160 mm	•								
A 275 x 345 / 240 x 300 mm		*	*						
AB 280 x 350 mm				•	•	•			
B 400 x 500 mm						•	•		
CC 600 x 800 mm								•	•
Approvable Readability	0.01 g	0.1 g	0.2 g	0.5 g	1 g	2 g	5 g	5 g	10 g
Recommended Readability (min.)	0.001g	0.005 g	0.01 g	0.02 g	0.05 g	0.1 g	0.2 g	0.2 g	0.5 g
Approvable Resolution	OIML Class II, up to 30,000e								
Recommended Resolution (max.)	up to 750,000d								
More Information	www.mt.com/PBK9								

* Smart Platter load plate option available



PBD769 Bench Platforms

Three Scales in One

Each PBD769 series can replace three 3,000e approved scales, saving space and costs while speeding up your processes. Even better, when a tare load is applied, the scale automatically starts to weigh with the smallest readability. Set up as a single range scale, the approvable readability is as high as 7,500e. In non-legal-for-trade applications, achieve stable resolutions of up to 150,000d.

► www.mt.com/PBD769

The PBD769 design provides stable accuracy even under unfavorable operating conditions. Unique construction in combination with a high-performing load cell make it suitable for a variety of challenging environments including areas of high humidity which need regular cleaning and are subject to harsh wash-down procedures.



Reliable Performance

A robust lever system together with multiple shock-absorbing protections facilitates excellent corner- and side-load stability, which makes this platform an excellent solution for many dynamic and static installations.



Improved Hygiene

The high-grade stainless-steel load plate with its machine-brushed surface features a low surface roughness, which avoids corrosion and makes it easy to clean.



Increased Throughput

Fast stabilization times and update rates from the high-performing digital load cell guarantee short cycle times even in wet and harsh environments.



PBD769 Bench Platforms

High Variability and Accuracy

Frame Material	Stainless steel AISI304					
Load Plate Material	Stainless steel AISI304; AISI316 for dynamic load plate (as option)					
Load Cell Material	stainless steel AISI304, brushed, e-polished					
	Maximum Capacity					
Platform Size	15 kg	30 kg	60 kg	120 kg	150 kg	300 kg
AB 280 x 350 mm	•	•				
B 400 x 500 mm			•	•		
CC 600 x 800 mm					•	•
Approvable Readability						
Class III, 3 x 3,000e Multi-Interval	3 kg / 1 g 6 kg / 2 g 15 kg / 5 g	6 kg / 2 g 15 kg / 5 g 30 kg / 10 g	15 kg / 5 g 30 kg / 10 g 60 kg / 20 g	30 kg / 10 g 60 kg / 20 g 120 kg / 50 g	30 kg / 10 g 60 kg / 20 g 150 kg / 50 g	60 kg / 20 g 150 kg / 50 g 300 kg / 100 g
Class III, 6,000e / 7,500e Single Range	2 g	5 g	10 g	20 g	20 g	50 g
Recommended Readability (min.)						
Up to 150,000d	0.1 g	0.2 g	0.5 g	1 g	1 g	2 g



PBD659/PBA639 Weighing Platforms

Cleaning and Compliance Made Easy

In regulated, hygienic environments, ease of equipment sanitation is as important as the operational performance. It is becoming increasingly important to streamline cleaning processes to not only eliminate contamination risk but also maximize productivity. The PBD659/PBA639 stainless steel weighing platforms enable you to address these challenges with an optimized hygienic design. The PBA639(x/xx) can also be used in hazardous areas.

► www.mt.com/PBA639-PBD659

PBD659/PBA639 bench platforms strictly adhere to hygienic design guidelines, facilitates quick and easy cleaning, and meets higher accuracy standards to optimize your processes and reduce costs.



Hazardous Area Approved

The PBA639(x/xx) platform series is available with global Ex approvals for use in Zone 1/21, Div. 1 and Zone 2/22, Div. 2 hazardous environments.



Accelerate cleaning speed

Easily achieve higher hygienic standards and boost cleaning speed by up to 40% with less effort. The innovative open platter and stainless steel design prevent moisture accumulation and allow you to eliminate contamination risk in regulated environments.



Prevent bad batches

The smart load cell used within the PBD platforms actively corrects and compensates for measurement errors caused by external and internal factors, which improves accuracy by up to 100% to prevent bad batches and reduce product waste.



Hygienic Design

PBD659/PBA639 Bench Platforms

Model	Platform Size	Capacity							
		3 kg	6 kg	12 kg/15 kg	30 kg	60 kg	120 kg/150 kg	300 kg	600 kg
PBD659/PBA639-QA	228 x 228 mm	•	•						
PBD659/PBA639-A	240 x 300 mm	•	•	•					
PBD659/PBA639-QB	305 x 305 mm			•	•	•			
PBD659/PBA639-BB	300 x 400 mm				•	•			
PBD659/PBA639-B	400 x 500 mm				•	•	•		
PBD659/PBA639-BC	500 x 650 mm					•	•	•	
PBD659/PBA639-CC	600 x 800 mm					•	•	•	•
PBD659 Approved Readability		0.5 g	1 g	2 g	5 g	10 g	20 g	50 g	200 g
PBD659 Recommended Readability		0.05 g	0.1 g	0.2 g	0.5 g	1 g	2 g	5 g	10 g
PBD659 Approvable Resolution		OIML Class III, 6,000e							
PBD659 Recommended Resolution (max.)		60,000d							
PBD659 Load Cell		Digital, Hermetically sealed, stainless steel (IP68/IP69k)							
PBA639 Approved Readability		1 g	1/2 g	2/5 g	5/10 g	10/20 g	20/50 g	50/100 g	100/200 g
PBA639 Recommended Readability		0.1 g	0.2 g	0.5 g	1 g	2 g	5 g	10 g	20 g
PBA639 Approvable Resolution		OIML Class III, 2 x 3,000e							
PBA639 Recommended Resolution (max.)		30,000d							
PBA639 Load Cell		Analog, Hermetically sealed, stainless steel (IP68/IP69k)							
More Information		www.mt.com/PBA639-PBD659							



PBA436/PBA439 Weighing Platforms

Durable, Easy-to-Clean Design

PBA439 and PBA436 series offer solutions for a wide range of weighing tasks in anything from light wet to harsh washdown environments. They are a perfect fit in any food, chemical or pharmaceutical processing application in which there is a need for durability and cleanliness. The PBA439(x/xx) can also be used in hazardous areas.

► www.mt.com/PBA439

This stainless-steel platform series was designed according to hygienic standards. The open, sturdy and straightforward mechanical design allows access to any part of the platform for efficient cleaning.



High-End Aluminum Load Cell

This load cell makes the PBA436 series applicable for light hose-down applications. It features moderate protection against water and humidity.



Hermetically Sealed Load Cell

This load cell makes the PBA439(x/xx) series the perfect choice for applications in extremely harsh conditions. It withstands steam and high pressure washdown.



Hazardous Area Approved

The PBA439(x/xx) platform series is available with global Ex approvals for use in Zone 1/21, Div. 1 and Zone 2/22, Div. 2 hazardous environments.



Affordable Weighing Platforms

PBA436/PBA439 Bench Platforms

Model	Platform Size	Capacity							
		3 kg	6 kg	15 kg	30 kg	60 kg	150 kg	300 kg	600 kg
PBA436/PBA439-QA	228 x 228 mm	•	•						
PBA436/PBA439-A	240 x 300 mm	•	•	•					
PBA436/PBA439-QB	305 x 305 mm			•	•	•			
PBA436/PBA439-BB	300 x 400 mm				•	•			
PBA436/PBA439-B	400 x 500 mm				•	•	•		
PBA436/PBA439-BC	500 x 650 mm					•	•	•	
PBA436/PBA439-CC	600 x 800 mm					•	•	•	•
PBA436 Approved Readability		1 g	1/2 g	2/5 g	5/10 g	10/20 g	20/50 g	50/100 g	100/200 g
PBA436 Recommended Readability		0.2 g	0.5 g	1 g	2 g	5 g	10 g	20 g	50 g
PBA436 Approvable Resolution		OIML Class III, 2 x 3,000e							
PBA436 Recommended Resolution (max.)		15,000d							
PBA436 Load Cell		Aluminium, potted (IP65)							
PBA439 Approved Readability		1 g	2 g	5 g	10 g	20g	50 g	100 g	200 g
PBA439 Recommended Readability		0.2 g	0.5 g	1 g	2 g	5 g	10 g	20 g	50 g
PBA439 Approvable Resolution		OIML Class III, 3,000e							
PBA439 Recommended Resolution (max.)		15,000d							
PBA439 Load Cell		Hermetically sealed, stainless steel (IP68/IP69k)							
More Information		www.mt.com/PBA439							



Scales and Platforms


For Dry and Dusty Environments

These series offer a wide range of scales and platforms designed to integrate easily into your weighing process, whether you need checkweighing, counting, kitting, packing or quality-assurance applications. Select your optimal combination and raise your throughput. At the same time, you will increase process security and improve product quality.

► www.mt.com/bench-scales


Save time and money with our smart colored display. colorWeight® makes completeness checks, portioning, classifying and counting simple and fast while reducing error risk. The display indicates at-a-glance if weight or count is below, within or above target.

colorWeight®



Premium and Advanced

Obtain accurate counting and checkweighing results in dust-contaminated environments. Pick&Pack ensures kit completeness the first time and avoids rework.

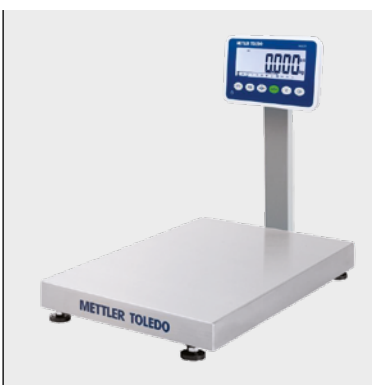

Industrial Basic Series

Industrial basic scales feature quality at attractive prices. They are suitable for basic food, chemical or manufacturing applications in dry and dusty environments.



Weighing Platforms

Solutions are available from 0.6 to 600 kg and thanks to innovative measuring technology, accuracies as low as 1mg can be reached.



Optimize Your Processes

Speed counts in today's competitive environment. Manufacturers are expected to produce error-free, high-quality products in record time. METTLER TOLEDO scales and platforms provide solutions for fast and accurate weighing, mixing, counting and checkweighing to increase your throughput.

Built not only to offer superior weighing performance, these instruments are designed for a long working life in rugged dry and dust-contaminated environments.

Intuitive user menus and available data-management systems allow proven traceability of your weighing processes, capturing everything from definition of articles and tolerances to tare values.

Intuitive operation and superior weighing performance combine to increase your throughput with fast, accurate results.




InVision™ Smart Scale

The Smart Way to Ensure Quality Kits

The smart algorithms of InVision™ combine weighing with visual recognition and picture capture for easy handling and error-free operation in picking and packing applications. The system directly connects to production and ERP systems for full data visibility and visual proof of successful order fulfillment.

► www.mt.com/InVision

Order picking is a manual process that is often prone to errors. Similar parts are mistaken for each other and counting errors occur when operators are under time pressure. Solve these issues with InVision™, your second set of eyes.

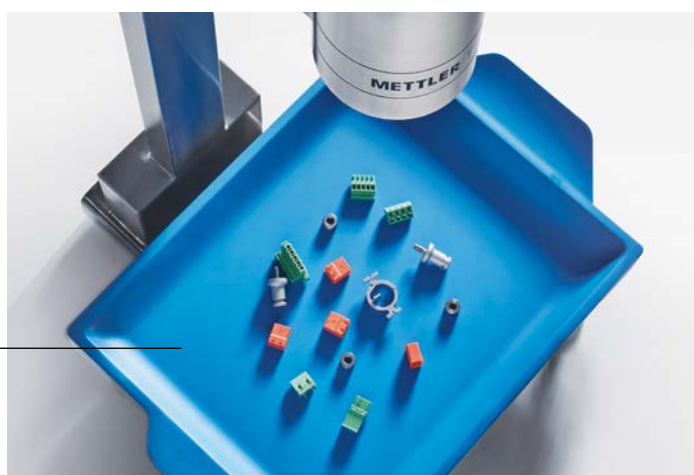

InVision™ Helps You Meet Your Operational Goals




Achieve up to 100% Quality Kits

Zero missing parts is a reality with InVision™. When you reduce the risk of human error in manual picking processes, you can achieve 100% quality kits and maximize customer satisfaction.



Boost Productivity up to 30%

InVision™ combines guided working steps and intuitive process verification with smart workstation design, leading to increased operator efficiency. See productivity improvements of up to 30% and get more out of your processes.

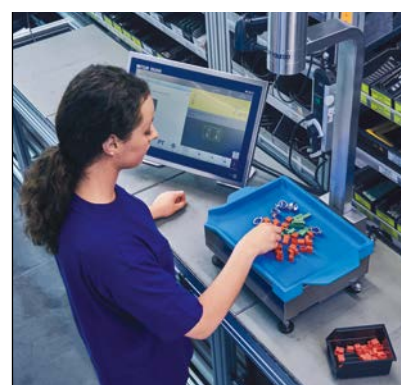

Benefit from True Traceability

Benefit from automatic data and image capture with every kit, then send this information to your connected ERP or MES for simplified track-and-trace documentation.



Discover the InVision™ Breakthrough

Achieve zero out-of-box failures in packing and kitting operations with InVision™, utilizing patented machine learning algorithms and dual verification for accuracy in parts selection and packaging. Guided working steps, automatic data capture and process verification significantly increase production quality and worker efficiency.

Setup	IND970 HMI, IND970 Elobox, PBD769-AB15 or PBK989-AB15, Camera
Technologies	Visual recognition and weighing
Application	Picking, counting
Minimum Size of Parts	0.4 mm
Minimum Weight of Parts	0.6 g
Attachable Platforms	1


Bench Scales for Dry Environments

Comparison of Standard Configurations

Scales with ingress protection up to IP65 are designed for demanding weighing tasks in dry and dust-contaminated environments.

► www.mt.com/dry-bench-scales

	ICS685 Premium bench scale for demanding applications. 		ICS4_5 (ICS465 / ICS445 / ICS435 / ICS425) Bench scale for advanced applications. 	
Applications	<ul style="list-style-type: none">• Intuitive counting and totalizing• Smart formulation and Pick&Pack• Fast classifying and average weighing		<ul style="list-style-type: none">• Accurate counting and totalizing• Advanced checkweighing and portioning• Fast average weighing	
Accuracy	★★★★★	Highest precision	★★★★★	Highest precision
Versatility	★★★★★	9 capacities, 8 sizes	★★★★☆	9 capacities, 8 sizes
Process Integration	★★★★★	Up to 4 scale and 4 data interfaces	★★★★☆	Up to 2 scale and 2 data interfaces
Data Management	★★★★★	Database stores up to 5,000 articles	★★★☆☆	Database stores up to 100 articles
Compliance Support	★★★★★	Alibi memory and user management functionality	★★★★☆	Alibi memory and user prompting functionality
Display	Color TFT (320 x 240) with 3 display layouts. colorWeight® functionality		Graphic LCD display with 3 display layouts. colorWeight® functionality	
Interfaces	RS232, RS422/485, USB, Ethernet, WLAN, Digital I/O (4 in- & 4 outputs)		RS232, RS422/485, USB, Ethernet, Digital I/O (4 in- & 4 outputs)	
Resolution (depending on platform)	Approvable: $\leq 60,000e$ OIML Class II Recommended (max.): $\leq 610,000d$		Approvable: $\leq 60,000e$ OIML Class II Recommended (max.): $\leq 610,000d$	
Capacity Range	0.6 kg up to 600 kg		0.6 kg up to 600 kg	
Platform Sizes (mm)	206 x 247 up to 600 x 800		206 x 247 up to 600 x 800	
Ingress Protection	IP54; optional IP65		IP54; optional IP65	
Approvals, Certificates	OIML, NTEP, CE, CSA C US		OIML, NTEP, CE, CSA C US	
More Information	See page 110 or www.mt.com/ICS685		See page 110 or www.mt.com/ICS465	
Requirement fulfillment scoring: ★★★★★ very good ★★★★★ good ★★★★★ fair ★★★★★ limited ★★★★★ none				

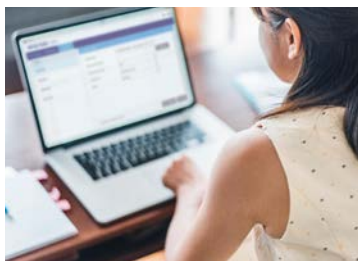


Data⁺ – Data Management Software Solution

Eliminate the need to enter data manually on a scale indicator and skip directly to entering data on a PC. By streamlining this process you save effort and increase processing speed up to 20x.

► www.mt.com/Dataplus

BBA231

Cost effective bench scale for basic applications.



ICS241

Mobile compact scale for simple applications.



- Basic weighing and checkweighing
- Counting and totalizing
- Average weighing

- Basic weighing
- Simple counting



Standard precision



Standard precision



6 capacities, 5 sizes



4 capacities, 1 size



1 standard &
1 optional interface



1 standard interface



–



Database stores up to
50 articles.



–



–

7-segment LCD display with white backlight

Graphic LCD display with white backlight

RS232, RS422/485, USB Device, Digital I/O

RS232

Approvable: 3,000e OIML Class III Recommended (max.): $\leq 15,000d$

Approvable: 3,000e OIML Class III Recommended (max.): $\leq 30,000d$

6 kg up to 300 kg

3 kg up to 30 kg

240 x 300 up to 600 x 800

230 x 306

IP54

–

OIML, NTEP, CE, UL

OIML, CE, UL

See page 114 or www.mt.com/BBA231

See page 116 or www.mt.com/ICS241

ICS Bench Scale Series

When Productivity and Flexibility Counts

The ICS685, ICS465, ICS445, ICS435 and ICS425 bench and compact scales series can be used for a variety of applications including counting, over/under checkweighing, classifying, filling and kitting. The rugged design makes these scales suited for dry and dust-contaminated environments in a variety of industries, such as metal fabrication, plastic molding and electronics.

► www.mt.com/dry-bench-scales

When verifying inventory, packaging or production quantities, every part or piece is important. The ICS685 and ICS4_5 scale family provides solutions to make parts-counting applications fast, accurate and cost-effective. ICS685 provides intuitive guidance for packing and ensures kit completeness on the first pick.




colorWeight® Speeds Up Production

Save time and money with the smart colored display that makes weighing applications faster and less error-prone.



Mobile Operation for Flexible Processes

An optional WLAN interface and long lasting Li-Ion battery pack allows flexible operation anywhere in the facility.

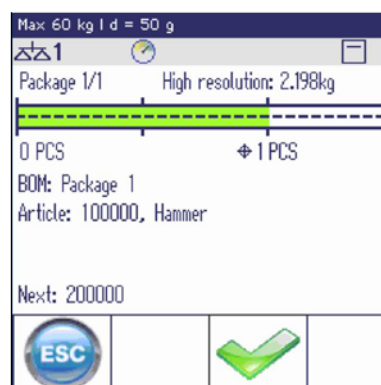

Pick&Pack™ and SpeedWeigh™ Ensure Kit Completeness

The Pick&Pack™ application guides the operator intuitively through an error-free picking process. Pair with SpeedWeigh™ to increase speed by up to 50%.



The Right Solution Tailored to Your Specific Needs

The ICS685, ICS465, ICS445, ICS435 and ICS425 product family is a highly modular product range consisting of a large variety of scale indicators and platforms to best fulfill your specific requirements. From simple weighing to integrated solutions with multiple components including third-party devices, a wide range of configurations are possible.

Connect your scale via Ethernet, WLAN or USB for easy data-transfer. Add a barcode reader or other peripheral for secure material identification.








ICS Bench Scale Series

Configurations for Dry Environments

ICS685, ICS465, ICS445, ICS435 and ICS425 compact scales are the perfect fit for your applications in dry or dusty environments. Whether you need a scale for simple weighing, advanced counting or quality control applications, you will find the perfect solution for your specific needs.

► www.mt.com/dry-bench-scales

1 Choose an application / scale indicator

					
Model	ICS425	ICS435	ICS445	ICS465	ICS685
Applications	• Basic Weighing	• Basic Weighing	• Basic Weighing • Counting	• Basic Weighing • Counting • Over/Under Checkweighing	• Basic Weighing • Counting • Over/Under Checkweighing • Filling/Dosing • Classifying • Formulation • SpeedWeigh • Pick&Pack
Color TFT Display					•
colorWeight®				•	•
Configurable Soft Keys			•	•	•
Numeric (n) / Alphanumeric (a) Keypad		n		n	a
Additional Interface Options	1	1	1	1	3
Attachable Platforms	1	1	2	2	4*

* Maximum 2 analog, or 2 IDNet platforms respectively 1 analog plus 1 IDNet

General specifications

Resolution for Analog Platforms**	300,000d; 7,500e, OIML/10,000d, NTEP
Display	ICS4_5: LCD liquid crystal graphical display with backlighting ICS685: Color TFT display 320 x 240 pixels
Keypad	Tactile-touch membrane keypad (PET), scratch-resistant material
Housing	Die-cast aluminium
Protection	IP65
Power	100 – 240 VAC; optional battery 12 V/2.5 A
Standard Interfaces	1 RS232

** for digital platforms, the resolution is defined by the respective platform

2 Select interface options / accessories

Optional Data Interfaces	RS232, RS422/485, USB device/host, Ethernet, Digital I/O (4 Inputs and 4 Outputs)
Optional Scale Interfaces	digital SICSpro, digital IDNet, analog (max. 2 analog, or 2 IDNet resp. 1 analog and 1 IDNet)
Accessories	Choose from various accessories such as wall bracket, columns/stands, roller tops, printers, battery packs, relays for digital I/O, barcode scanners and much more.

3 Combine with the right platform for dry environment

PBK785		Maximum Capacity					
Platform/Load Plate Size		0.6 kg	3 kg	6 kg	6 kg	15 kg	35 kg
XS 206 x 247 (130 x 160 mm)		•	•	•			
SM 206 x 247 (200 x 240 mm)					•		
LA 247 x 357 (240 x 350 mm)						•	•
Approvable Readability		0.01 g	0.1 g	0.1 g	1 g	1 g	1 g
Recommended Readability (min.)		0.001 g	0.01 g	0.01 g	0.1 g	0.1 g	0.1 g
Frame Material		Dye-Casted aluminum					
Load Plate Material		Stainless steel AISI304					
Load Cell		Monobloc technology					
Approvable Resolution		OIML Class II, up to 60,000e					
Recommended Resolution (max.)		up to 610,000d					
Ingress Protection		IP65					



PBD555		Maximum Capacity			
Platform/Load Plate Size		3 kg	6 kg	15 kg	35 kg
SM 206 x 247 (200 x 240 mm)		•	•		
LA 247 x 357 (240 x 350 mm)				•	•
Approvable Readability		0.5 g	1 g	2 g	5 g
Recommended Readability (min.)		0.05 g	0.1 g	0.2 g	0.5 g
Frame Material		Dye-Casted aluminum			
Load Plate Material		Stainless steel AISI304			
Load Cell		Digital aluminum potted			
Approvable Resolution		OIML Class III, up to 7,500e			
Recommended Resolution (max.)		up to 75,000d			
Ingress Protection		IP65			



PBD655		Maximum Capacity						
Platform Size		6 kg	12 kg	30 kg	60 kg	120 kg	300 kg	600 kg
A 240 x 300 mm		•	•					
BB 300 x 400 mm				•	•			
B 400 x 500 mm					•	•		
BC 500 x 650 mm					•	•	•	
CC 600 x 800 mm					•	•	•	•
Approvable Readability		1 g	2 g	5 g	10 g	20 g	50 g	100/200 g
Recommended Readability (min.)		0.1 g	0.2 g	0.5 g	1 g	2 g	5 g	10 g
Frame Material		Powder coated, carbon steel						
Load Plate Material		Stainless steel AISI304						
Load Cell		Digital aluminum potted						
Approvable Resolution		OIML Class III, 6,000e						
Recommended Resolution (max.)		60,000d						
Ingress Protection		IP65						
More Information		www.mt.com/PBD655						



BBA231 Bench Scale Series

Fast – Versatile – Economical

The BBA231 bench scale is a cost-effective, easy-to-operate one-for-all solution and a perfect fit for basic applications in dry and dust-contaminated environments. The user-friendly scale indicator with its highly visible display promotes quick operation and can measurably improve production efficiency.

► www.mt.com/BBA231

In addition to five tactile and responsive standard keys, the scale features two free definable function keys. This allows fast and easy switching between functions and ensures quick set-up and easy use.



Highly Visible Display

For excellent readability under any light condition, the BBA231 scale features a large, 60 mm high LCD display with an adjustable white backlight.



Versatile Usage

The scale includes an RS232 interface which allows communication with a printer or PC. Its plastic enclosure is both stylish and functional.



Robust Construction

The rugged platform construction ensures durability and accurate weighing results. Overload stop protects the load cell from damage.



BBA231 Bench Scale

For a Variety of Applications

Display	7-segment LCD Display					
Material	Load plate: AISI304					
Power Supply	85 – 264 VAC, 6AA Batteries					
Data Interfaces	RS232					
	Maximum Capacity					
Platform / Load Plate Size	6 kg	15 kg	35 kg	60 kg	150 kg	300 kg
A 240 x 300 mm	•	•				
BB 300 x 400 mm			•	•		
B 400 x 500 mm				•	•	
BC 500 x 650 mm				•	•	•
CC 600 x 800 mm				•	•	•
Approvable Readability	2 g	5 g	10 g	20 g	50 g	100 g
Recommended Readability (min.)	0.5 g	1 g	2 g	5 g	10 g	20 g
Approvable Resolution	OIML Class III, 3,000e					
Recommended Resolution (max.)	15,000d					
More Information	www.mt.com/BBA231					



ICS241 Compact Scale Series

Convenient – Smart – Efficient

The ICS241 is a versatile counting and simple-weighing scale for various industrial environments, including production, warehouse & logistics, packaging and quality control. It offers an easy-to-use interface with an intuitive LCD display and alphanumeric keypad for easy, fast operation.

► www.mt.com/ICS241

The ICS241 offers configurable soft keys for fast access to key functions, such as sampling and counting. The numeric keypad allows for fast input of tare or sample weights.




Smart Database Management

The transaction database can save each counting/weighing result and up to 30,000 entries via SD card for traceability.



Batteries for Mobile Operation

The ICS241 features an easily accessible battery compartment with six D-size dry or rechargeable batteries for self-contained operation.

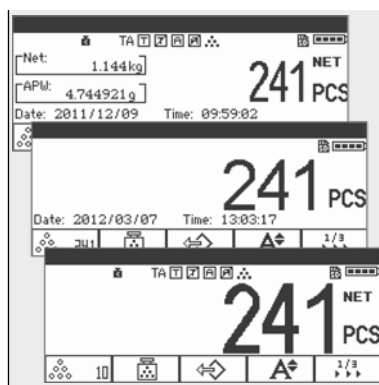

Intuitive LCD Display

The large graphic LCD display shows text and graphics for excellent operator guidance. All relevant information is shown on one screen.



ICS241 Counting Scales

For Simple Counting

Display	Graphic LCD display, with white backlight			
Material	Scale: plastic			
Power Supply	6D size batteries or 100 – 240 VAC over adapter			
Data Interfaces	RS232			
	Maximum Capacity			
Platform / Load Plate Size	3 kg	6 kg	15 kg	30 kg
228 x 228 mm	•	•	•	•
Approvable Readability	1 g	2 g	5 g	10 g
Recommended Readability (min.)	0.1 g	0.2 g	0.5 g	1 g
Approvable Resolution	OIML Class III, 3,000e			
Recommended Resolution (max.)	30,000d			
More Information	www.mt.com/ICS241			








Bench Platforms

For Dry and Dusty Environments

Weighing platforms designed for your most demanding weighing tasks in dry and dust- contaminated environments.

► www.mt.com/ind-platforms

	PBK9(x) Premium platform for best-in-class performance.  		PBA757 Robust and rugged platform that gives you fast and precise results.  	
Applications	<ul style="list-style-type: none">• Precision weighing and counting• Automated weight determination• Net content control		<ul style="list-style-type: none">• Dynamic weighing and counting• Shipping and manifesting• Net content control	
Accuracy	★★★★★	Highest precision	★★★★☆	Advanced precision
Versatility	★★★★☆	9 capacities, 5 sizes	★★★☆☆	3 capacities, 2 sizes
Process Integration	★★★★★	Connects to scale indicators or direct to PLC	★★★☆☆	Optional digital scale interface
Compliance Support	★★★★★	Hazardous-area approved.	★★★☆☆	Hazardous-area approved.
Resolution	Approvable: up to 30,000e OIML Class II Recommended (max.): 750,000d		Approvable: 6,000e OIML Class II Recommended (max.): </=60,000d	
Capacity Range	60 kg up to 300 kg		60 up to 300 kg	
Platform Sizes (mm)	400 x 500 up to 600 x 800		400 x 500 and 600 x 800	
Ingress Protection	IIP66 / IP68		IP65	
Weighing Platform Material	Frame: powder coated carbon steel Load plate: stainless steel AISI304/316		Frame: powder coated mild steel Load plate: stainless steel AISI304	
Load Cell	Monobloc technology in stainless steel housing		Analog aluminum load cell, optional digital interface	
Approvals, other certificates	OIML, NTEP		OIML, NTEP	
Hazardous Area Approvals 	IECEX/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)		ATEX (Zone 2/22)	
More Information	See page 120 or www.mt.com/PBK9		See Page 122 or www.mt.com/PBA757	
Requirement fulfillment scoring: ★★★★★ very good ★★★★★ good ★★★★★ fair ★★★★★ limited ★★★★★ none				



High Precision in Action

Watch the video to learn how the platform design enables the highest precision in production environments and how this can help you improve your weighing processes to ensure consistent quality, increase productivity and meet regulations.

► www.mt.com/PBK9

PBD655

Digital platform for advanced applications.



PBA655(x)

Analogue platform for standard applications.



PBA220

Analogue platform for basic applications.



- In-process quality control
- Automated weight determination
- Net content control

- Sorting and tracking
- Shipping and manifesting

- Sorting and tracking
- Shipping and manifesting



Advanced precision



Advanced precision



Standard precision



7 capacities, 5 sizes



7 capacities, 5 sizes



6 capacities, 9 sizes



Connects to scale indicators or direct to PLC



—



—



—



Hazardous-area approved.



—

Approvable: 6,000e OIML Class III
Recommended (max.): $\leq 60,000d$

Approvable: 6,000e OIML Class III
Recommended (max.): $\leq 60,000d$

Approvable: 3,000e OIML Class III
Recommended (max.): $\leq 15,000d$

6 kg up to 600 kg

6 kg up to 600 kg

6 kg up to 300 kg

240 x 300 up to 600 x 800

240 x 300 up to 600 x 800

240 x 300 up to 600 x 800

IP65

IP65

IP65

Frame: powder coated carbon steel
Load plate: stainless steel AISI304

Frame: powder coated carbon steel
Load plate: stainless steel AISI304

Frame: powder coated carbon steel
Load plate: stainless steel AISI304/316

Aluminum, potted

Aluminum, potted

Aluminum, potted

OIML, NTEP

OIML, NTEP

OIML, NTEP

n/a

NEC (Zone 0, Zone 2); NEC (Div. 1 or Div 2)

n/a

See page 124 or www.mt.com/PBD655

See page 124 or www.mt.com/PBA655

www.mt.com/PBA220

PBK987 Bench Platform Series

For Precision in Dry Environments

For applications that require high reliability with industry-leading metrological performance, PBK987 high-precision bench platforms, with resolutions of up to 750,000 divisions, are the right choice. Their unique construction makes them suitable for a variety of challenging environments, including heavily dust-contaminated areas.

► www.mt.com/PBK9

The Monobloc load cell at the core of the PBK9 weighing platform guarantees the highest precision and reliability. The robust load-cell housing features integrated overload protection and durable mechanical interfaces for many years of intensive use.



Increased Throughput for Fast Processes

Industry-leading stabilization times make the platforms suitable for high-speed weighing processes.



Accurate Counting

Instead of using a separate reference scale for counting applications, one PBK9 with a fitting scale indicator (e.g. ICS685) can be used for the entire process.



Direct Connectivity for Automation

PBK9 APW weighing platforms can be directly connected via the ACT350 transmitter or IND360 indicator.



PBK9 High-Precision Bench Platforms For Outstanding Accuracy

Frame Material	Stainless steel AISI304			
Load Plate Material	Stainless steel AISI304/316			
Load Cell	Monobloc technology in stainless steel housing			
	Maximum Capacity			
Platform / Load Plate Size	60 kg	120 kg	150 kg	300 kg
B 400 x 500 mm	•	•		
CC 600 x 800 mm			•	•
Approvable Readability	2 g	5 g	5 g	10 g
Recommended Readability (min.)	0.1 g	0.2 g	0.2 g	0.5 g
Approvable Resolution	OIML Class II, up to 30,000e			
Recommended Resolution (max.)	up to 750,000d			
More Information	www.mt.com/PBK9			



PBA757 Bench Platforms

Designed for Dynamic and Static Use

The robust and reliable lever system grants excellent corner- and side-load stability, which makes this platform an excellent solution for many dynamic and static conveyor applications. Furthermore, it is the best choice for a multitude of counting and simple weighing tasks. The approvable readability is as high as 6,000e. In non-legal-for-trade applications, stable resolutions of up to 60,000d can be achieved.

► www.mt.com/PBA757

The PBA757 analog platform is suitable for many purposes, such as conveyor systems, counting, filling and self-check-out applications. It stands for fast, precise and stable operation in dynamic and rugged manual applications thanks to its rigid corner- and side-load characteristics.



Fast Dynamic Weighing

The unique mechanical design of the PBA757 platform series allows for stable weighing results even in fast dynamic conveyor applications. It facilitates high throughput and faster processes.



Reliable Weighing

The robust and highly reliable lever system together with multiple shock-absorbing protections facilitates excellent corner- and side-load stability.



Safe in Hazardous Areas

The platforms are approved for use in the presence of flammable gases and dusts in Zone 2/22.



PBA757 Bench Platforms

Highly Accurate and Rigid

Frame Material	Mild steel powder coated		
Load Plate Material	Stainless steel AISI304; AISI316 for dynamic load plate (as option)		
Load Cell Material	Aluminium		
Scale Interface	Analog, SICSPRO (as option), IDNet (as option)		
	Maximum Capacity		
Platform Size	60 kg	120 kg	300 kg
B 240 x 300 mm	•	•	
CC 300 x 400 mm		•	•
Approvable Readability			
Class III, 6,000e Single Range	10 g	20 g *	50 g
Min. Capacity (certified platforms only)	200 g	400 g	1000 g

* For B120 model, 6000e is only available with SICSPRO interface.



PBD655 and PBA655(x) Bench Platforms

For Reliability in Dry Environments

The digital PBD655 and analog PBA655(x) bench-scale platform-series are designed for durability and reliability. They are the perfect choice for dry and dust-contaminated environments, such as receiving, inspection, manufacturing and warehousing. The platforms feature resolutions of up to 60,000 divisions.

► www.mt.com/PBD655

The PBD655 platform series is a rugged digital device designed for simplicity and dependability. It features an approvable resolution of OIML 6,000e. This provides optimal accuracy while still being cost-effective.




Ready to Operate in Seconds

The PBD655 platform is a true digital, pre-calibrated device designed for simplicity. Plug the platform into a suitable scale indicator and start weighing.



High Durability

The extremely robust platform design features an approvable resolution of OIML 6,000e for optimal weighing and counting precision.

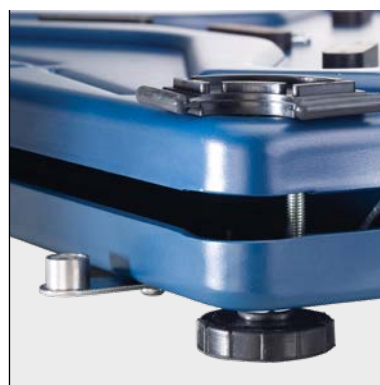

Damage Protected

The PBA655 platform features several overload stops to ensure the best possible load cell protection and long life.



PBD655 and PBA655(x) Bench Platforms


For Out-of-the-Box Weighing

Frame Material	Powder-coated carbon steel						
Load Plate Material	Stainless steel AISI304						
Load Cell	Digital or analog aluminum						
	Maximum Capacity						
Platform Size	6 kg	12 kg	30 kg	60 kg	120 kg	300 kg	600 kg
A 240 x 300 mm	•	•					
BB 300 x 400 mm			•	•			
B 400 x 500 mm				•	•		
BC 500 x 650 mm				•	•	•	
CC 600 x 800 mm				•	•	•	•
Approvable Readability	1 g	2 g	5 g	10 g	20 g	50 g	100 / 200 g
Recommended Readability (min.)	0.1 g	0.2 g	0.5 g	1 g	2 g	5 g	10 g
Approvable Resolution	OIML Class III, 6,000e						
Recommended Resolution (max.)	60,000d						
More Information	www.mt.com/PBD655						





Our Solutions For Your Production

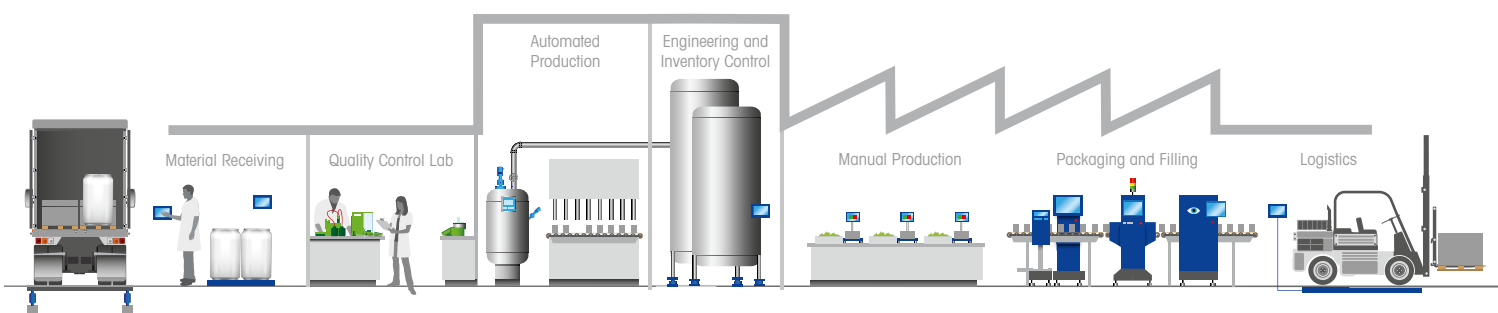

Floor, Low-Profile and Platform Scales

4

Floor Scales and Platforms

For Dry, Wet and Harsh Environments	128
-------------------------------------	-----

Rugged, Lift and Versatile Platforms – Compare the Models	130
------------------------------------------------------------------	-----

High Capacity, Heavy Duty Platforms – Compare the Models	132
-----------------------------------------------------------------	-----

PFK989/PFK988 – Precise Weighing in Any Environment	134
------------------------------------------------------------	-----

PowerDeck™ PFD7_ Floor Platforms – Maximize Productivity and Yields	136
----------------------------------------------------------------------------	-----

PFA579(x)lift/PFA779lift – Designed for Hygienic Demands	138
-----------------------------------------------------------------	-----

PFA575(x)/PFA579(x) – Rugged for Durable, Reliable Weighing	140
--------------------------------------------------------------------	-----

PFA584(x)/PFA589(x) – Globally Configurable Solutions	142
--------------------------------------------------------------	-----

BFA231/BFA236 – Simple, Reliable Weighing Performance	144
--------------------------------------------------------------	-----

Low-Profile, Lift and Mobile Scales – Compare the Models	146
-----------------------------------------------------------------	-----

PUA574/PUA579(x) – Easy Loading and Space Saving	148
---------------------------------------------------------	-----

PUA579(x)lift – Excellent Hygiene and Thorough Cleaning	150
----------------------------------------------------------------	-----

PUA579(x) – Maximum Flexibility, Mobile Use	152
----------------------------------------------------	-----

BUA231/BUA236 – Simple and Easy to Use	154
-----------------------------------------------	-----

ACW520 – Cable-Free Weighing for Safety and Mobility	156
-------------------------------------------------------------	-----

► Pallet Scales and Pallet Truck Scales – For More Information, See Page	160
---------------------------------------------------------------------------------	-----

► For Compatible Scale Indicators – See Our Scale Indicator Portfolio on Page	20
--------------------------------------------------------------------------------------	----


Floor Scales and Platforms

For Dry, Wet and Harsh Environments

Our versatile floor and platform scales provide you with the highest precision, reliability and durability for a variety of heavy-duty applications in industrial environments. Easy to clean and move, they can be configured for ground or pit weighing.

► www.mt.com/floor-scales

METTLER TOLEDO floor and platform scales are durable and reliable in industrial settings thanks to rocker-foot suspension and an installation frame that transfers vertical load. Their hygienic design includes a lift deck, making these scales extremely easy to clean, while a low profile and wheel set enables easy handling and flexibility.

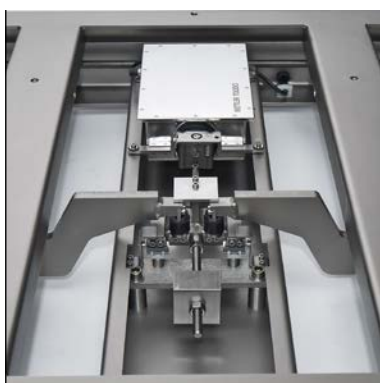

Advanced Technology

A MonoBloc load cell and hybrid platform allow high-precision weighing with resolutions up to 30,000e and capacities from 300 kg to 30,000 kg.



Hygienic Design

These scales are ideal for hygienic applications and quick wash-down due to smooth surfaces, washout areas, a lift deck and an IP69k rating.



Low-Profile Lift Deck

Easy to load, lift and clean, these scales enable mobile weighing for greater flexibility and productivity.



Built for Your Specific Applications

Our versatile platform structures are a great fit for applications that require easy cleaning, moving and loading. They are designed for heavy-duty, high-precision weighing in food, pharma, chemical and manufacturing settings.

- Models in stainless and painted mild steel
- Smooth and patterned surface options
- Rocker-foot suspension
- Low profile lift deck; optional wheels for mobility
- Hermetically sealed load cell rated IP68 / IP69k
- Hygienic design
- MonoBloc weighing cell and hybrid leveling system
- Also available as pallet and pallet truck scales

IP68

IP65






GMP

Rugged, Lift and Versatile Platforms

Precise, Durable, Easy Clean and Hygienic

Our rugged, versatile weighing platforms are designed for your highest precision in an easy-to-clean format, whether they are installed above ground or using a pit. They offer you repeatable weighing in dry, wet, hygienic and harsh environments.

► www.mt.com/floor-scales

	PFK989(x)/PFK988(x) Stainless and mild steel platform fit for dry, wet and wash-down environments. <div>  </div>		PFD774/PFD779 Fully sealed stainless and mild steel platforms fit for dry, wet, heavy wash-down and heavy duty environments. <div>  </div>	
Applications	<ul style="list-style-type: none"> Precision weighing Automated weight determination Chemical and pharma processes 		<ul style="list-style-type: none"> Process weighing Filling and formulation Chemical, pharma, and food processes 	
Accuracy	★★★★★	Highest precision weighing	★★★★★	Lowest profile scale for process tolerances
Versatility	★★★★★	4 capacities, 4 sizes	★★★★★	6 capacities, 7 sizes, optional free sizes
Process Integration	★★★★★	Digital interface for fast system integration	★★★★★	Digital interface for fast system integration
Compliance Support	★★★★☆	GMP; hazardous-area approved.	★★★★☆	Hazardous-area approved.
Resolution	Approvable: up to 30,000e OIML Class II, 3 x 10,000e multi interval, OIML Class III Recommended (max.): 750,000d		Approvable: 2 x 10,000e, 2 x 6000e multi range, 6,000e OIML Class III; 10,000e CMC; 10,000d NTEP; Recommended (max.): 50,000d	
Capacity Range	300 kg up to 3,000 kg		300 kg up to 12,000 kg	
Platform Size (mm)¹	800 x 1,000 up to 1,500 x 1,500		800 x 800 up to 2,500 x 2,000	
Ingress Protection	IP66/IP68		IP68	
Weighing Platform Material	Frame: Stainless steel AISI304 / mild steel Load plate: Stainless steel AISI304 / 316 / mild steel		Stainless Steel AISI 304 or 316 option / carbon steel	
Load Cell	Stainless steel (AISI304), brushed, e-polished, Electromagnetic Force Restoration		Stainless steel, hermetically sealed POWERCELL® SLB615D	
Approvals, other certificates	OIML, NTEP, GMP		OIML, NTEP	
Special Features	Lift deck or removable deck plate		Sealed sandwich design structure Lowest profile on market	
Hazardous Area Approvals 	IECEx/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)		IECEx/ATEX (Zone 2/22), NEC (Div 2; Zone 2)	
More Information	www.mt.com/PFK9		www.mt.com/Powerdeck	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ☆☆☆☆☆ none

¹ Some options are not globally available, please refer to the local data sheet



High Precision in Action

Watch the video to learn how METTLER TOLEDO's platform design enables the highest precision in production environments, and how it can help you improve your weighing processes to ensure consistent quality, better productivity and regulatory compliance.

► www.mt.com/PFK9

PFA779lift/PFA579(x)lift

Stainless platform with lift device fit for wet, wash-down, hygienic and hazardous environments. Easy to load and clean.



- Filling and formulation
- Bulk material handling
- Wet and hygienic material weighing



Reliable weighing; improved weighing consistency



4 capacities, 4 sizes, optional free sizes



Analog or digital interface for fast system integration



Hygienic design; GMP; hazardous area approved.

Approvable: 2 or 3 x 3,000e multi range, 2 x 3,000e multi interval, 6,000e OIML Class III Recommended (max.): 30,000d

300 kg up to 3,000 kg

1,000 x 1,000 up to 1,500 x 1,500

IP68

Stainless steel AISI 304 or 316 option

Stainless steel, hermetically sealed, strain gage

OIML, NTEP

Lift deck

ATEX (Zone 1/21 or Zone 2/22)

www.mt.com/PFA579lift
www.mt.com/PFA779lift





High Capacity, Heavy Duty Platforms

Accurate and Reliable Weighing

Rugged and high capacity weighing platforms are built for heavy industrial use. A variety of floor platforms/options are available to match your application's requirements.

► www.mt.com/floor-scales

	PFA575/PFA579(x)		PFA584/PFA589(x)	
	Stainless and mild steel platform fit for dry, wet and wash-down environments.		Stainless and mild steel platform fit for dry, wet and wash-down environments.	
	 		 	
Applications	<ul style="list-style-type: none"> Industrial weighing Filling and formulation Bulk material handling 		<ul style="list-style-type: none"> Industrial weighing Filling and formulation Bulk material handling 	
Accuracy	★★★★☆	Reliable weighing; improved weighing consistency	★★★★☆	Reliable weighing; improved weighing consistency
Versatility	★★★★☆	4 capacities, 5 sizes, optional free sizes	★★★★★	7 capacities, 7 sizes, optional free sizes
Process Integration	★★★★☆	Analog or digital interface for fast system integration	★★★★☆	Analog or digital interface for fast system integration
Compliance Support	★★★★☆	GMP; hazardous area approved.	★★★★☆	Hazardous-area approved.
Resolution	Approvable: 2 or 3 x 3,000e multi range, 2 x 3,000e multi interval, 6,000e OIML Class III; Recommended (max.): 30,000d		Approvable: 2 or 3 x 3,000e multi range, 2 x 3,000e multi interval, 6,000e OIML Class III; Recommended (max.): 30,000d	
Capacity Range	300 kg up to 3,000 kg		300 kg up to 12,000 kg	
Platform Size (mm)¹	1,000 x 1,000 up to 2,000 x 1,500		800 x 800 up to 2,000 x 2,000	
Ingress Protection	IP65/IP68		IP68	
Weighing Platform Material	Stainless steel AISI 304 or 316 option / carbon steel		Stainless steel AISI 304 or 316 option / carbon steel	
Load Cell	Stainless steel, hermetically sealed, strain gage		Stainless steel, hermetically sealed, strain gage	
Approvals, other certificates	OIML, NTEP, GMP		OIML	
Special Features	Removable deck plate		Lowest profile on market	
Hazardous Area Approvals 	ATEX (Zone 1/21 or Zone 2/22)		IECEx/ATEX (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)	
More Information	www.mt.com/PFA575 / www.mt.com/PFA579x		www.mt.com/PFA584 / www.mt.com/PFA589	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★★★★ limited ☆☆☆☆☆ none

¹ Some options are not globally available, please refer to the local data sheet



Why Elephants Prefer Cable-Free

No matter where your weighing needs take you, the Cable-Free floor scale offers the flexibility you need to get there. Watch the video to see a unique application!

► www.mt.com/ind-cable-free-floor-scale

BFA236/BFA231

Stainless and mild steel. Low profile fit for dry areas. Easy to load and clean.



- Basic weighing
- Bulk material handling
- Inventory control



Reliable weighing



2 capacities, 2 sizes



RS232 system integration via scale indicator



—

Approvable: 3,000e, OIML Class III
Recommended (max.): 15,000d

1,500 kg up to 3,000 kg

1,250 x 1,250 and 1,500 x 1,500

IP67

Stainless steel AISI 304 / carbon steel

Alloy steel, hermetically sealed

OIML

Scale indicator is connected with platform

n/a

www.mt.com/BFA231-236



PFK989/PFK988 Floor Scales

Precise Weighing in Any Environment

Accurate weighing helps you to manage raw materials, ensure compliance with regulations and improve your product quality. For floor scale applications that require reliability with the best accuracy available, PFK9 weighing platforms provide industry-leading performance. The wide range of platforms with 4 capacities from 300 to 3,000 kilograms in 4 sizes makes them suitable for a variety of applications and industries.

► www.mt.com/PFK9

A Monobloc-technology load cell sits at the core of PFK9 weighing platforms to guarantee the highest precision and reliability. A robust load-cell housing features integrated overload protection and durable mechanical interfaces for many years of intensive use.



Functional Design

Pit installation allows easy loading and unloading on the ground level. Pit frames, available as accessories for all floor scales, offer a short installation time and easy positioning/leveling.



Direct Connectivity

PFK9 APW weighing platforms can be directly connected via plug-in cables to many process-control systems for safe, easy integration.



Safe in Hazardous Environments

When working in a hazardous environment, safety is critical. PFK9 weighing platforms are approved for use in hazardous areas classified Category 3, Division 2 for top performance in gaseous and dusty environments.



PFK9 Floor Platforms

Accurate – Reliable – Robust – Versatile

Platform Size	Maximum Capacity			
	300 kg	600 kg	1,500 kg	3,000 kg
C 1,000 x 800 mm	•	•		
D 1,250 x 1,000 mm		•	•	
E 1,500 x 1,250 mm			•	•
ES 1,500 x 1,500 mm			•	•
Approvable Readability (15 000e, class II)	20 g	50 g	100 g	200 g
Recommended Readability (min.)	0.5 g	1 g	2 g	5 g
Approvable Resolution	3 x 10,000eMI (class III), 15,000e (class II)			
On Request	30,000e (class II)			
Recommended Resolution (max.)	750,000d			
More Information	www.mt.com/PFK9			




PowerDeck™ PFD7_ Floor Platforms

Maximize Productivity and Yields

Only PowerDeck™ continuously monitors every component and overall status of the scale. Operators are immediately alerted to any deviations, meaning your critical measurements will be true every time. PowerDeck™ offers an increased level of Performance that allows you greater confidence in your production process knowing that your scale is verifying every measurement every time.

► www.mt.com/PowerDeck

PowerDeck™ provides lasting precision even in the harshest industrial applications. It's monitoring capabilities, real-time alerts, and operator guidance ensure accurate results with very few adjustments.

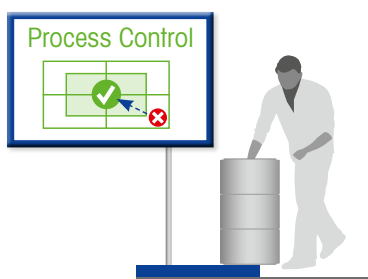

Real-Time Operator Guidance

Avoid off-center placement errors. Quick verification of properly placed goods eliminates weighing errors. It alerts the operator in real-time.



Multiple Batch Sizes

With new accuracy classes (6,000e/10,000e) self-monitoring smart load cells continually monitor and compensate for measurement deviations. Weigh with tighter tolerances to improve profitability.



Safe in Hazardous Environments

When working in a hazardous environment, safety is a requirement. PFD7_ weighing platforms are approved for Zone 2/22, Division 2.



PowerDeck™

PFD774/PFD779 Floor Platforms

Platform Sizes	Maximum Capacity								
	300 kg	600 kg	1,200 kg	1,500 kg	3,000 kg	6,000 kg	3,000 kg	6,000 kg	12,000 kg
1.0 x 1.0 m	•	•	•	•	•				
1.25 x 1.00 m	•	•	•	•	•				
1.5 x 1.25 m	•	•	•	•	•	•			
1.5 x 1.5 m	•	•	•	•	•	•	•	•	•
2.0 x 1.5 m	•	•	•	•	•	•	•	•	•
2.0 x 2.0 m							•	•	•
2.5 x 2.0 m							•	•	•
Height	78 mm	78 mm	78 mm	78 mm	78 mm	78 mm	102 mm	102 mm	102 mm
Approved Accuracy Class III									
3000e [g]	100	200		500	1,000	2,000	1,000	2,000	5,000
6000e [g]	50	100	200		500	1,000	500	1,000	2,000
2 x 10,000e [kg/g]	200/20 300/50	500/50 600/100		1,000/100 1,500/200	2,000/200 3,000/500	5,000/500 6,000/100			



PFA579(x)lift/PFA779lift Floor Scales

Designed for Hygienic Demands

Excellent metrology combined with high reliability and easy handling makes these platforms ideal for sanitary situations. Easy-raise lift decks allow quick cleaning around and beneath the platform, meeting your demands for hygiene as well as accuracy.

► www.mt.com/PFA579lift

► www.mt.com/PFA779lift

For optimum corrosion prevention, the entire platform is made out of high-grade stainless steel, type AISI304. The surface of the load plate can be optionally improved to a roughness of $<1\mu\text{m}$. For more aggressive environments, the platform material can be switched to AISI316 stainless steel.



Hygienic Details

The PFA779lift has no hidden crevices and is designed to withstand the most thorough cleaning.



Sophisticated Design

All hinges and moving parts are sealed with special washers. In the design of PFA779lift, load cell cables are laid in the hermetically sealed section tubes for added protection.



One-Handed Operation

Lifting the deck for cleaning requires a minimum amount of strength and uses just one hand while the operator stands next to the platform.



PFA579(x)lift/PFA779lift Platforms

Robust Design

Platform Size	Maximum Capacity			
	300 kg	600 kg	1,500 kg	3,000 kg
DS 1,000 x 1,000 mm	•	•	•	
D 1,250 x 1,000 mm	•	•	•	•
E 1,500 x 1,250 mm	•	•	•	•
ES 1,500 x 1,500 mm	•	•	•	•
Free Sizes				
FL 800 x 800 – 1,000 x 1,000 mm	•	•	•	
FM 1,000 x 1,000 – 1,500 x 1,500 mm	•	•	•	•
Approvable Readability	50 g / 100 g	100 g / 200 g	200 g / 500 g	500 g / 1,000 g
Recommended Readability (min.)	10 g	20 g	50 g	100 g
Approvable Resolution	2 x 3,000e multi range, 3 x 3,000e multi range, 2 x 3,000e multi interval, 1 x 6,000e single range			
Recommended Resolution (max.)	30,000d			
More Information	www.mt.com/PFA579lift			



PFA575(x)/PFA579(x) Floor Scales


Rugged for Durable, Reliable Weighing

Our rugged floor platforms are a reliable partner for your weighing applications. Mounted directly on adjustable feet, these platforms can be placed on the floor or installed into prepared pit frames. A wide range of options and accessories results in a highly flexible, versatile product range that fits your requirements.

► www.mt.com/PFA579x

► www.mt.com/PFA575

The PFA57_ platform series is designed for harsh industrial daily work. High-grade materials and state-of-the-art manufacturing processes makes the various platforms reliable for many applications. For special requirements beyond our versatile portfolio, please contact your local METTLER TOLEDO market organization. We can customize specialized platforms according to your needs.

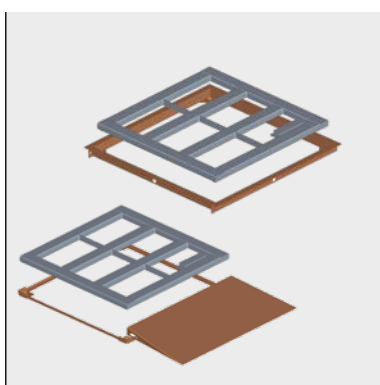

Quick Installation and Easy Maintenance

A movable deck plate, quick pit and pit frame makes this scale suitable for and easy to integrate into many types of industrial environments.



Adaptable to Your Needs

Change the size, capacity, resolution, material or surface structure to meet your individual application needs.



Reliable and Robust

The rocker-foot design is self-aligning and self-centering. It balances side shocks and transmits force vertically into load cell, promoting accuracy and durability.



PFA575(x)/PFA579(x) Platforms

Robust Design

Platform Size	Maximum Capacity			
	300 kg	600 kg	1,500 kg	3,000 kg
DS 1,000 x 1,000 mm	•	•	•	
D 1,250 x 1,000 mm	•	•	•	•
E 1,500 x 1,250 mm	•	•	•	•
ES 1,500 x 1,500 mm	•	•	•	•
G 2,000 x 1,500 mm	•	•	•	•
Free Sizes				
FL 700 x 400 – 1,000 x 1,000 mm	•	•	•	
FM 1,000 x 1,000 – 1,500 x 1,500 mm	•	•	•	•
FH 1,500 x 1,500 – 2,000 x 1,500 mm	•	•	•	•
Approvable Readability	50 g / 100 g	100 g / 200 g	200 g / 500 g	500 g / 1,000 g
Recommended Readability (min.)	10 g	20 g	50 g	100 g
Approvable Resolution (optional)	2 x 3,000e multi range, 3 x 3,000e multi range, 2 x 3,000e multi interval, 1 x 6,000e single range			
Recommended Resolution (max.)	30,000d			
More Information	www.mt.com/PFA574 / www.mt.com/PFA579x			





PFA584(x)/PFA589(x) Floor Scales

Globally Configurable Solutions

We know the needs of every industry are different, which is why the PFA5 is not a one-size-fits-all solution. We have taken the pain out of the floor scale configuration process by creating an easy-to-order, globally standardized set of components that can easily be mixed-and-matched to formulate your ideal scale.

- ▶ www.mt.com/PFA584
- ▶ www.mt.com/PFA589

Significantly ease the ordering and scale up process with flexible customization and expert METTLER TOLEDO consultancy. It's easy to see why this solution is ideal for multinational companies, because it eliminates the need to order different configurations country-by-country.

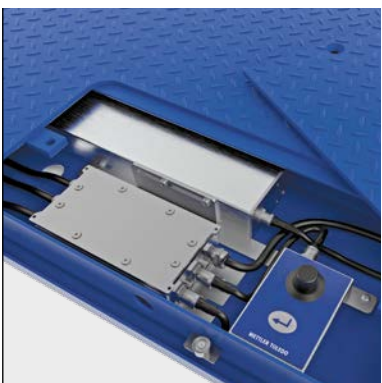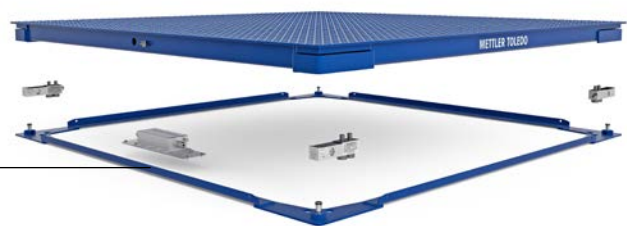


Accurate Out-of-the-Box
By storing the factory calibration values within the scale, you get out-of-the-box accuracy and easy setup.



Faster Scale-Up
The ability to mix-and-match from a set of globally approved components significantly eases the ordering and scale-up process.



Global Approvals for Consistency
Metrology: OIML, NTEP, CPA Wireless: FCC, CE/RED, SRRC Safety: UN38.3, IEC/EN61010, Ex: IECEx, ATEX, FM approved for Hazardous Areas Zone 1/21, 2/22 and Div 1/Div 2

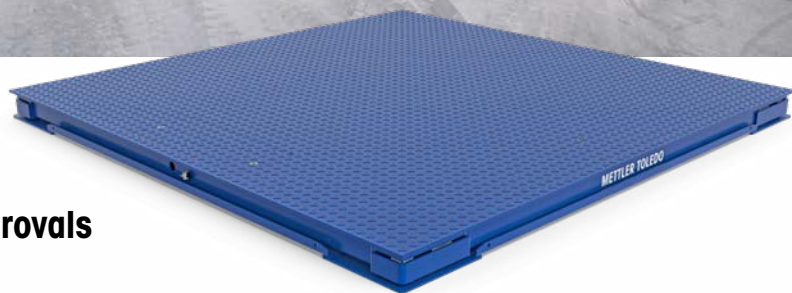

Premium Components with Global Approvals

Mix and Match Your Ideal Configuration

Model		PFA584	PFA589
Platform Material	Mild steel powder coated/painted, blue	•	
	Stainless steel AISI304		•
	Stainless steel AISI316L		•
Top Deck Plate	Smooth		•
	Pattern	•	
Sizes		From 0.8 x 0.8 m to 2.0 x 2.0 m	
Capacities		From 300 kg to 12,000 kg	
Compliance	Metrology	OIML Class III, NTEP Class III, CPA Class III	
	EMC	10 V/m	
Hazardous Area Approvals	ATEX	No	3G / 3D or 2G / 2D
	IECEx	No	Gb / Db or Gc /Dc
	FM US	NI/I, II, III/2/ABCDG/T6 Ta=55 °C	
	FM Canada	NI/I, II/2/ABCDG/T6 Ta=55 °C / DIP/III/2/T6 ta=55 °C	
Load Cell		SLB415 / 0745A, IP68/IP69K	
Scale Interfaces		Analog, SICSPRO, Cable-Free	



BFA231/BFA236 Floor Scales

Simple, Reliable Weighing Performance

These scales' rocker-foot load-cell suspension enables reliable basic-weighing accuracy in dry and wet environments. Simple designs in stainless or mild steel use easy-loading ramps and above-ground installation.

► www.mt.com/BFA231-236

Rocker-foot suspension is self-aligning and self-centering. It balances side shocks and transmits force vertically into the load cell. Because only vertical forces are transmitted, it eliminates side load and bump impact for better accuracy and longevity in industrial environments. The ramp configuration allows drive-on or drive-through weighing.



Quick Start-Up

These scale indicators and platforms are connected and calibrated in our plant so they are ready to commission and operate when they reach yours.



Easy, Flexible Installation

The rocker foot can be installed with or without anchor plate to allow material handling with or without side load.



Increase operation speed

The simple and convenient menu configuration and intuitive setup makes the BFA231/BFA236 easy to use. It requires minimal operator training and measurably improves production efficiency.



BFA231 and BFA236

Basic and Reliable Weighing

Display	40 mm 7 digits LCD display with backlighting	
Material	Scale indicator housing: painted mild steel or stainless steel depending on platform selection	
Power Supply	AC: 85–264VAC; 50Hz–60Hz	
Data Interfaces	RS232	
	Maximum Capacity	
Platform Size	1,500 kg	3,000 kg
E 1,500 x 1,250 mm	•	•
ES 1,500 x 1,500 mm	•	•
Approvable Readability	500 g	1,000 g
Recommended Readability (min.)	200 g	200 g
Approvable Resolution	OIML Class III, 3,000e	
Recommended Resolution (max.)	15,000d	
More Information	www.mt.com/BFA231-236	


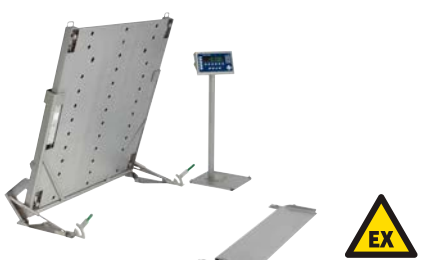



Low-Profile, Lift and Mobile Scales

Easy Loading, Lifting, Moving and Cleaning

Our low profile weighing platforms are designed for easy loading and cleaning in a space-saving construction with no pit required. They offer reliable weighing performance in dry, wet/wash-down and hygienic environments depending on platform structures, materials and finishes.

► www.mt.com/PUA579

	PUA579(x)/PUA574 Low profile for your dry, wet, hygienic or hazardous environment. Easy loading. 		PUA579(x)lift Liffable low profile for wet, hygienic or hazardous environments. Easy loading and cleaning. 	
Applications	<ul style="list-style-type: none"> • Basic and precision weighing • Filling and formulation • Bulk material handling 		<ul style="list-style-type: none"> • Filling and formulation • Bulk material handling • Wet and hygienic material weighing 	
Accuracy	★★★★☆	Reliable weighing; improved weighing consistency	★★★★☆	Reliable weighing; improved weighing consistency
Versatility	★★★★☆	3 capacities, 2 sizes, optional free sizes	★★★★☆	3 capacities, 2 sizes, optional free sizes
Process Integration	★★★★☆	Analog or digital interface for fast system integration	★★★★☆	Analog or digital interface for fast system integration
Compliance Support	★★★★★	Hygienic design; GMP; hazardous area approved.	★★★★★	Hazardous area approved.
Resolution	Approvable: 2 or 3 x 3,000e multi range, 2 x 3,000e multi interval, 6,000e OIML Class III Recommended (max.): 30,000d		Approvable: 2 or 3 x 3,000e multi range, 2 x 3,000e multi interval, 6,000e OIML Class III; Recommended (max.): 30,000d	
Capacity Range	300 kg up to 1,500 kg		300 kg up to 1,500 kg	
Platform Size (mm)	850 x 850 up to 1,500 x 1,500		850 x 850 up to 1,500 x 1,250	
Ingress Protection	IP68 / IP65		IP68	
Weighing Platform Material	Stainless steel AISI 304 or 316 option / carbon steel		Stainless steel AISI 304 or 316 option	
Load Cell	Stainless steel, hermetically sealed, strain gage		Stainless steel, hermetically sealed, strain gage	
Approvals, other certificates	OIML, GMP		OIML, GMP	
Special Features	Many options		Lift deck	
Hazardous Area Approvals 	ATEX (Zone 1/21 or Zone 2/22)		ATEX (Zone 1/21 or Zone 2/22)	
More Information	www.mt.com/PUA574 / www.mt.com/PUA579		www.mt.com/PUA579	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★★★★ limited ★★★★★ none


PUA579(x)mobile

Movable low profile for dry, wet or hazardous environments. Easy loading and cleaning.



BUA231/BUA236

Stainless and mild steel low profile fit for dry areas. Easy loading and cleaning.

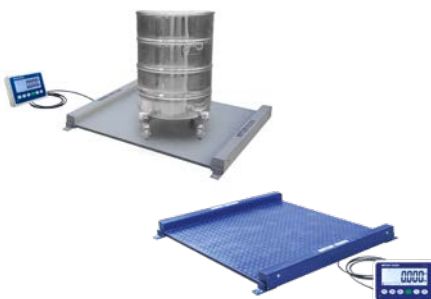

- Filling and formulation
- Bulk material handling
- Movable weighing

- Basic weighing
- Bulk material handling
- Inventory control



Reliable weighing



Good weighing performance



3 capacities, 2 sizes, optional free sizes



2 capacities, 2 sizes



Analog or digital interface for fast system integration



RS23 system integration via scale indicator



Hygienic design; hazardous area approved.



–

Approvable: 2 x 3,000e multi range, OIML Class III
Recommended (max.): 30,000d

Approvable: 3,000e, OIML Class III;
Recommended (max.): 15,000d

300 kg up to 1,500 kg

600 kg up to 1,500 kg

850 x 850 up to 1,500 x 1,250

1,000 x 1,000 up to 1,250 x 1,250

IP68

IP67

Stainless steel AISI 304

Stainless steel AISI 304 / carbon steel

Stainless steel, hermetically sealed, strain gage

Alloy, hermetically sealed, strain gage

OIML, GMP

OIML

Mobile

Platform and scale indicator combined

ATEX (Zone 1/21 or Zone 2/22)

n/a

www.mt.com/PUA579

www.mt.com/BUA231-236

PUA574/PUA579(x) Low-Profile Scales

Easy Loading and Space Saving

When passage height is low and simple cleaning is required, our low-profile platform is the easy answer. PUA57_ range platforms offer versatility through different materials, surface treatments and a wide range of sizes and capacities to fit your application.

- ▶ www.mt.com/PUA579x
- ▶ www.mt.com/PUA574

PUA574/579(x) low-profile scales offer the highest flexibility for individual needs by allowing you to configure and adapt the platforms to your individual application.




Reliable, Durable Accuracy
Self-aligning and self-centering rocker-foot suspension balances side shocks and transmits force vertically into the load cell to eliminate side load and bump impact.



Easy Loading
The 35mm-height platform using one or two short ramps requires a minimum of effort to load.



Effective, Efficient Cleaning
The scale's low-profile is characterized by an easy-to-clean, GMP-compliant design to prevent potential contamination sources.

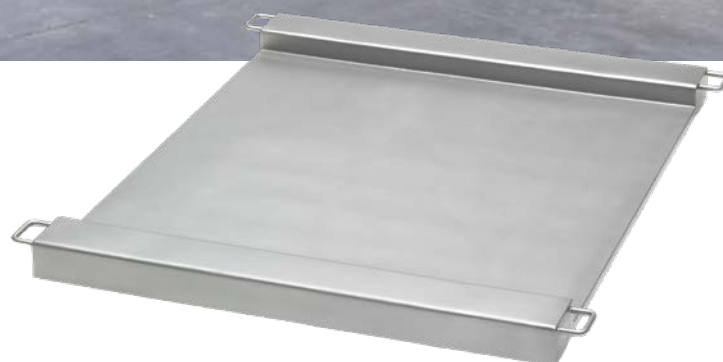

PUA574/PUA579(x) Low-Profile Platforms

Ergonomic Designs

Platform Size	Maximum Capacity		
	300 kg	600 kg	1,500 kg
CS 850 x 850 mm	•	•	
E 1,500 x 1,250 mm; height: 35 mm	•	•	•
Free Size			
Height 35 mm / 45 mm	750 x 400...1,500 x 1,500 (length x inner width)		
Approvable Readability	50 g / 100 g	100 g / 200 g	200 g / 500 g
Recommended Readability (min.)	10 g	20 g	50 g
Approvable Resolution	2 x 3,000e multi range, 3 x 3,000e multi range, 2 x 3,000e multi interval, 1 x 6,000e single range, up to 30,000d		
Recommended Resolution (max.)	30,000d		
More Information	www.mt.com/PUA574 / www.mt.com/PUA579x		



GMP

PUA579(x)lift Low-Profile Scales

Excellent Hygiene and Thorough Cleaning

Is systematic cleaning a key factor in your manufacturing process? You can move the PUA579(x) platform into an upright position for thorough cleaning with only a few hand movements and a minimum amount of physical effort to solve your cleaning and safety issues.

► www.mt.com/PUA579

PUA579(x)lift reduces downtime required for cleaning, increasing productivity. Its ergonomic design helps to guarantee the safety of your staff through an ergonomic, efficient design.



Thorough Cleaning

The open platform can be easily moved to an upright position for cleaning. A detachable ramp and sealed parts add to cleaning ease.



Easy Operation

Gas springs make the platform easy to open and close.



Operator Safety

Two-handed operation of the lifting device from a side orientation creates maximum operator safety.



PUA579(x) Low-Profile Platforms with Lifting Device

Ergonomic Designs

Platform Size	Maximum Capacity		
	300 kg	600 kg	1,500 kg
CS 850 x 850 mm; height: 35 mm	•	•	
E 1,500 x 1,250 mm; height: 35 mm	•	•	•
Free Size			
Height: 35 mm	750 x 400...1,500 x 1,250 (length x inner width)		
Approvable Readability	50 g / 100 g	100 g / 200 g	200 g / 500 g
Recommended Readability (min.)	10 g	20 g	50 g
Approvable Resolution	2 x 3,000e multi range, 3 x 3,000e multi range, 2 x 3,000e multi interval, 1 x 6,000e single range		
Recommended Resolution (max.)	30,000d		
More Information	www.mt.com/PUA579		



PUA579(x) Mobile Low-Profile Scales

Maximum Flexibility, Mobile Use

Our mobile low-profile scales allow weighing throughout your facility to improve productivity. These easy-to-move scales also enhance your ability to clean your workspace, saving effort and optimizing floor use.

► www.mt.com/PUA579

The PUA579(x) is a five-star weighing platform. It optimizes space-use in your facility because it can be pushed aside whenever it is not needed. Easy mobility also offers cost- and inventory-reduction because it can be used in different locations.



Safety First

Safe two-hand operation avoids user risks. Wheels are set into drive position manually for secure weighing in place.



Always in the Right Position

The installation frame helps the operator to always place the platform in the same way, offering an excellent solution for repetitive weighing processes.



Move It All at Once

The scale indicator can be connected directly to the platform, allowing you to move the whole weighing system to a new location.



PUA579(x) Low-Profile Platforms for Mobile Use

Ergonomic Designs

Platform Size	Maximum Capacity		
	300 kg	600 kg	1,500 kg
CS 850 x 850 mm; height: 35 mm	•	•	
E 1,500 x 1,250 mm; height: 35 mm	•	•	
Free Size			
Height: 35 mm	750 x 400...1,500 x 1,250 (length x inner width)		
Approvable Readability	50 g / 100 g	100 g / 200 g	200 g / 500 g
Recommended Readability (min.)	10 g	20 g	50 g
Approvable Resolution	2 x 3,000e multi range		
Recommended Resolution (max.)	30,000d		
More Information	www.mt.com/PUA579		



BUA231/BUA236 Low-Profile Scales

Simple and Easy to Use

These scales' rocker-foot load-cell suspension enables reliable basic weighing in dry and wet environments. A simple design in stainless or mild steel uses easy-loading ramps and above-ground installation.

► www.mt.com/BUA231-236

Self-aligning, self-centering rocker-foot suspension balances side shocks and transmits force vertically into the load cell, eliminating side load and bump impact. Scale height allows use of shorter ramps for better space use while still allowing drive-on / drive-through weighing.



Quick Commissioning and Start-Up

Scale indicator and platform are connected and calibrated in our plant so they are ready to commission and use in yours.



Easy, Flexible Installation

Wheels in the fork end and a handle on the frame make the platform fit for flexible use. Rocker-foot suspension ensures accurate and reliable weighing.



One Scale for Many Applications

The versatile IND231/236 scale indicator includes applications for simple weighing, check-weighing, counting and accumulation.



BUA231 and BUA236

Designed for Basic and Reliable Weighing

Display	40 mm 7-digit LCD display with backlighting	
Material	Scale indicator housing: painted mild steel or stainless steel depending on platform selection	
Power Supply	AC: 85 – 264VAC; 50Hz – 60Hz	
Data Interfaces	RS232	
	Maximum Capacity	
Platform Size	600 kg	1,500 kg
DS 1,000 x 1,000 mm	•	•
EES 1,250 x 1,250 mm	•	•
Approvable Readability	200 g	500 g
Recommended Readability (min.)	50 g	100 g
Approvable Resolution	OIML Class III, 3,000e	
Recommended Resolution (max.)	15,000d	
More Information	www.mt.com/BUA231-236	



Cable-Free Floor Scale

Complete Freedom from Cables

From day-one installation to moving throughout your production line, the Cable-Free floor scale is designed with simplicity in mind. Set the scale exactly where you need it, weigh with pre-calibrated accuracy and benefit from 100 percent elimination of cable headaches. Our Cable-Free floor scale offers you the freedom to upgrade your facility for maximum flexibility.

► www.mt.com/ind-cable-free-floor-scale

The Cable-Free floor scale eliminates home run cable, offers a two-year battery life without charging, and a digital platform with factory calibration to break away from traditional floor scales that tie you down.



Place and Weigh

Cable-free and pre-calibrated, this floor scale allows you to place and weigh same-day.



Flexibility to Move Anywhere

The Cable-Free floor scale offers you the flexibility to place your scale and accessories exactly where you need them.



Support for Lean Manufacturing

The Cable-Free floor scale is not tied down like a traditional floor scale, making it ideal for environments requiring lean manufacturing.

No Cables... No Troubles



Cable-Free is Ideal for:

- Hygienically sensitive environments requiring frequent cleaning
- High-traffic areas where tripping hazards should be avoided
- Facilities with reduced manufacturing floor space, especially clean rooms
- Reducing construction on site for easy installation
- Facilities with frequent station changes


Global Compliance

- Metrology: OIML, NTEP, CPA
- Wireless: FCC, CE/RED, SRRC
- EMC: FCC, CE
- Bluetooth: SIG
- Safety: UN38.3/Battery transportation, IEC/EN61010, UL





Our Solutions For Your Production

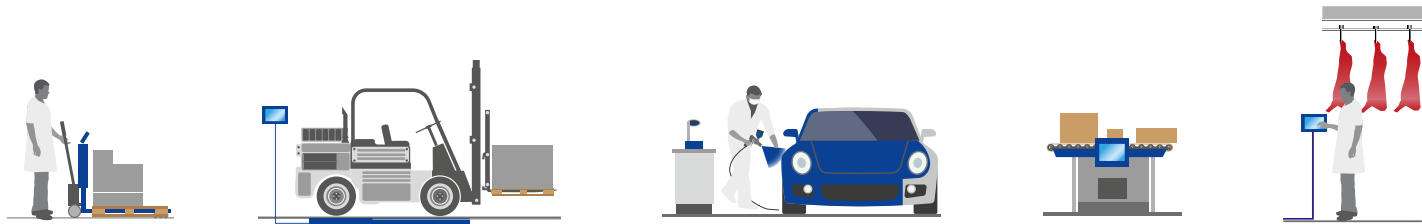

Pallet Scales and Pallet Truck Scales

Efficient, Mobile Pallet Weighing – Compare the Models	160
PTA455/PTA459(x) – Movable Weighing with Easy Loading	162
PJA434/PJA439 – For High-Productivity Mobile Weighing	164
BSA231/BSA236 – Movable and Easy-to-Use	166
BTA231 – Mobile Weighing for Improved Productivity	168

TLF820/VFS120 Forklift Scales

Unbeatably Robust	170
-------------------	-----

Paint Scales

A Fast, Easy Route to the Right Color	172
RPA345 – Simplified and Flexible Paint Mixing	172
RPA455 – For Consistent Paint Mix Quality	174
ADI856 – The Right Color at Your Fingertips	176
SmartShelf Weighing Pads – Remote Inventory Management	178

Postal Scales

Efficient Shipping Solutions	180
BC Scale Family – Perfect for Letters and Parcels	180
BC Scales Model Overview – Optimized for Accuracy and Simplicity	182

Overhead Rail and Wall Scales






Processing Beef, Pork or Lamb	184
-------------------------------	-----

Pallet Scales and Pallet Truck Scales

Efficient, Mobile Pallet Weighing

METTLER TOLEDO's easy-to-clean mobile weighing solutions are designed to integrate easily into your processes for more efficient filling, packing, formulation, inventory, load management and counting to raise throughput, productivity and process flexibility.

► www.mt.com/ind-pallet-truck-scales

	PTA459(x) and PTA455 Reliable, easy-to-move weighing accuracy.  		PJA334/PJA434/PJA439 Improved flexibility. Easy to lift and move.  	
Applications	<ul style="list-style-type: none"> • Movable weighing • Filling and formulation • Material handling on pallet 		<ul style="list-style-type: none"> • Filling and formulation • Material handling on pallet • Load management and inventory control 	
Accuracy	★★★★☆	Reliable weighing; improved weighing consistency	★★★★☆	Reliable weighing; Good weighing consistency
Versatility	★★★★☆	4 capacities, 1 size, optional free size	★★★★★	6 capacities, 6 size
Process Integration	★★★★☆	Analog or digital interface for fast system integration	★★★★☆	RS232 system integration offline, Wifi system integration online
Compliance Support	★★★★☆	Designed for easy cleaning; GMP certified; hazardous approved.	★★★★☆	Hazardous-area approved.
Resolution	Approvable: 2 or 3 x 3,000e multi range, 2 x 3,000e multi interval, 6,000e OIML Class III Recommended (max.): 30,000d		Approvable: 2 x 3000e multi range, OIML III Recommended (max): 10,000d	
Capacity Range	300 kg up to 3,000 kg		600 kg up to 3,000 kg	
Platform Size (mm x mm)	Space between 2 forks 600 x 1,060		Fork length 1,150/950/1,400; Fork outside width 550/690	
Ingress Protection	IP68 / IP65		IP65	
Weighing Platform Material	Stainless steel AISI 304 or 316 option / carbon steel galvanized		Stainless steel AISI 304 / carbon steel	
Load Cell	Stainless steel, hermetically sealed, strain gage		Stainless steel, hermetically sealed, strain gage	
Approvals, other certificates	OIML, GMP		OIML	
Special Features	Movable		Mobile (platform and scale indicator combined)	
Hazardous Area Approvals 	ATEX (Zone 1/21 or Zone 2/22)		ATEX (Zone 1/21)	
More Information	www.mt.com/PTA455 / www.mt.com/PTA459		www.mt.com/PJA	

Requirement fulfillment scoring: ★★★★★ very good ★★★★★ good ★★★★★ fair ★★★★★ limited ★★★★★ none

BSA231/BSA236

Basic weighing, good accuracy.
Easy to move.

**BTA231**

Basic, dry-environment weighing.
Easy to lift and move.



- Basic movable weighing
- Bulk material handling on pallet
- Inventory control

- Basic mobile weighing
- Material handling on pallet
- Load management and inventory control



Reliable weighing



Good weighing performance



2 capacities, 1 size



1 capacities, 2 size



RS232 system integration
via scale indicator



RS232 system integration offline



–



–

Approvable: 3,000e, OIML Class III
Recommended (max.): 6,000d

Division: 2,000d

600 kg up to 1,500 kg

2,000 kg

Space between 2 forks 600 x 1,060

Fork length 1,220;
Fork outside width 555/690

IP67

IP54

Stainless steel AISI 304 / carbon steel

Stainless steel AISI 304 / carbon steel

Stainless steel, hermetically sealed, strain gage

Alloy, hermetically sealed, strain gage

OIML

Movable (platform and scale indicator combined)

Mobile (platform and scale indicator combined)

n/a

n/a

www.mt.com/BSA231-236

www.mt.com/BTA231

PTA455/PTA459(x) Pallet Scales

Movable Weighing with Easy Loading

PTA455/PTA459 – the pallet scales for goods shipping and receiving, manufacturing and packaging. These rugged, reliable pallet scales are made of hot-galvanized mild steel or stainless steel. A wide range of options and accessories help these versatile scales to meet your requirements. Let us find the right solution for your application.

► www.mt.com/PTA455

► www.mt.com/PTA459

PTA pallet scales come with wheels and a handle so you can weigh wherever it is most convenient for you (product option / accessory). PTA455 comes in galvanized mild steel for dry and light-wet applications, while the PTA459(x) stainless-steel version allows use in wet applications in both safe and hazardous areas.



Open Design for Efficient Cleaning

The frame design with its open tubes makes it easy for you to clean and flush out.



Adaptable to Your Needs

A variety of options and accessories make the platform highly flexible. Choose different materials, surface treatments, wheels, handles and resolutions.



EU Standard Pallets and Beyond

PTA scales are designed to fit the most common EU pallet size. Other dimensions or a tailored mechanical design are available on request.



PTA455/PTA459(x) Pallet Platforms

Ergonomic Designs

Platform Size	Maximum Capacity			
	300 kg	600 kg	1,500 kg	3,000 kg
1 200 x 600 mm	•	•	•	•
Free Sizes				
500 x 450 – 1 260 x 1 000 mm	•	•	•	•
Approvable Readability	50 g / 100 g	100 g / 200 g	500 g / 1,500 g	500 g / 1,000 g
Recommended Readability (min.)	10 g	20 g	50 g	100 g
Approvable Resolution	2 x 3,000e multi range, 3 x 3,000e multi range, 2 x 3,000e multi interval, 1 x 6,000e single range			
Recommended Resolution (max.)	30,000d			
More Information	www.mt.com/PTA455 / www.mt.com/PTA459			



GMP

PJA434/PJA439 Pallet Truck Scales

For High-Productivity Mobile Weighing

Our pallet truck scales are designed to integrate easily into filling, inventory, load management or counting applications anywhere in your workplace. Basic mobile weighing can help increase your throughput and process flexibility.

► www.mt.com/PJA

Four load cells embedded into the forks of a standard pallet truck make this mobile solution a fully functional scale capable of lifting, weighing, and moving items anywhere in your work area. Unique FlexBolt load-cell fixation eliminates the potential negative influence of stress on the chassis caused by the load, ensuring superb accuracy and repeatability.



Boost Time and Cost Savings

Weigh and move at the same time – no independent material load-in time added.



Fit to Your Processes

Different wheel options help you work anywhere on any floor condition. The ICS4x9 scale indicator lets you perform multiple weighing functions.



Save Space and Clean Freely

Because it requires no pit construction, your workspace retains maximum flexibility. Easy movement also means easy floor cleaning!



Designed for Seamless Integration

PJA434/PJA439 Pallet Truck Scales

Display	LCD liquid crystal graphical display with backlighting				
Material	Scale indicator: Stainless steel 1.4301, AISI 304 Platform: Painted mild steel, stainless steel				
Power Supply	Battery 12V / 7Ah				
Data Interfaces	RS232				
	Maximum Capacity				
Platform Size	600 kg	1,000 kg	1,500 kg	2,000 kg	2,500 kg
PJA434/PJA439 Painted steel 1,150/950/1,400 x 550/690 fork length x over-fork width	•	•	•	•	•
PJA434/PJA439 Stainless steel 1,150/950/1,400 x 550/690 fork length x over-fork width	•	•	•	•	•
Approvable Readability (optional)	0.2 kg	n/a	0.2/0.5 kg	0.5/1 kg	0.5/1 kg
Recommended Readability (min.)	0.1/0.2 kg	0.1 kg	0.2/0.5 kg	0.5/1 kg	0.5/1 kg
Approvable Resolution (optional)	OOIML Klasse III, 2x3 000e Mehrbereich				
Recommended Resolution (max.)	10,000d				
More Information	www.mt.com/PJA				



BSA231/BSA236 Pallet Scales

Movable and Easy-to-Use

Our U-shaped platform scales are specially designed for weighing pallets. These simple-to-configure platforms in stainless or mild steel offer you high productivity in dry and wet environments.

► www.mt.com/BSA231-236

Rocker-foot suspension is self-aligning and self-centering. It balances side shocks and transmits force vertically into the load cell. With only vertical forces transmitted, side load and bump impact are eliminated for better accuracy and scale longevity. Wheels in the fork end and a handle on the frame make the platform easy-to-move for flexible use.



Quick Commissioning and Start-Up

Scale indicator and platform are connected and calibrated in our plant so they are ready to commission and use in yours.



Easy, Flexible Installation

Wheels in the fork end and a handle on the frame make the platform fit for flexible use. Rocker-foot suspension ensures accurate and reliable weighing.



One Scale for Many Applications

The versatile IND231/236 scale indicator includes applications for simple weighing, check-weighing, counting and accumulation.



BSA231 and BSA236

Designed for Basic and Reliable Weighing

Display	40 mm 7-digit LCD display with backlighting	
Material	Scale indicator housing: painted mild steel or stainless steel depending on platform selection	
Power Supply	AC: 85–264VAC; 50Hz–60Hz	
Data Interfaces	RS232	
	Maximum Capacity	
Platform Size	600 kg	1,500 kg
1 260 x 840mm	•	•
Approvable Readability	200 g	500 g
Recommended Readability (min.)	50 g	100 g
Approvable Resolution	OIML Class III, 3,000e	
Recommended Resolution (max.)	15,000d	
More Information	www.mt.com/BSA231-236	



BTA231 Pallet Truck Scales

Mobile Weighing for Improved Productivity

Our pallet truck scales are designed to integrate easily into filling, inventory, load management or counting applications anywhere in your workplace. Basic mobile weighing can help increase your throughput and process flexibility.

► www.mt.com/BTA231

A 40 mm-high, 7-digit LCD display with backlight is easy to read in all lighting conditions. Four load cells embedded into the forks of a standard pallet truck make this mobile solution a fully functional scale capable of lifting, weighing, and moving items anywhere in your work area.



Boost Cost and Time Savings

Thanks to the ergonomic, full-function handle, you can move and weigh at the same time – no extra material loading time for an independent weighing application is added.



Fit to Your Rugged Processes

High quality wheels in the truck design allow easy movement over uneven surfaces.



Save Space and Clean Freely

Because it requires no pit construction, your workspace retains maximum flexibility. Easy movement also means easy floor cleaning!



BTA231 Pallet Truck Scale

Designed for Seamless Integration

Display	40 mm 7-digit LCD display with backlighting
Material	Scale indicator housing: painted mild steel; platform: painted mild steel
Power Supply	Battery 6V / 10Ah
Data Interfaces	No
Maximum Capacity	2,000 kg
Platform Size	1,220 x 555/690 mm fork length x over-fork width
Approvable Readability	None approved
Recommended Readability (min.)	1 kg
Approvable Resolution	None approved
Recommended Resolution (max.)	2,000d
More Information	www.mt.com/BTA231



TLF820/VFS120 Forklift Scales

Unbeatably Robust

Designed for tough industrial environments, METTLER TOLEDO forklift scales set the standard for reliability, safety and accuracy in heavy-use applications. Whether your business is freight logistics, shipping or warehousing, on-board weighing can significantly speed up your processes.

► www.mt.com/forkliftscales

Cut maintenance costs in half with a forklift scale that requires no shimming and infrequent calibration thanks to patented three-point suspension.



Easy, Seamless Integration

Weight data is transmitted seamlessly from an embedded smart PC. Preconfigured workflows offer step-by-step guidance, reducing effort and human error.




Long Life, Doesn't Break Down

The heavy-use scale carriage enables you to keep working when other scales break down. Minimal maintenance and a long lifespan ensure low cost of ownership.



Reduce Risk of Accidents

The scale has a high-visibility window, making it easy for the forklift operator to see loads, position forks for lifting and avoid accidents.

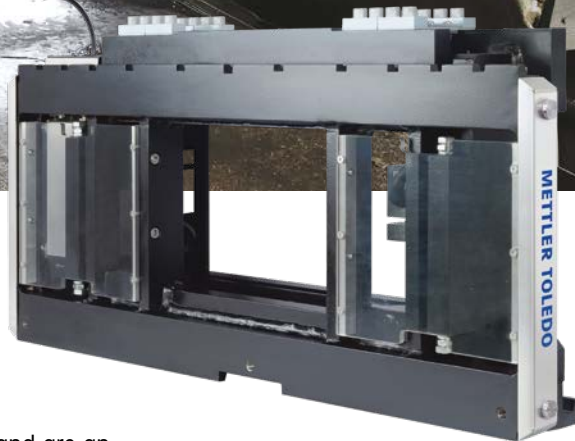

Onboard Pallet Weighing

VFS120/TLF820 Forklift Scales

Our forklift scales can be installed on any Class II or III forklift truck and are an ISO-approved accessory compatible with any other ISO-approved accessories.

	VFS120 – Basic Connectivity	TLF820 – Advanced Connectivity
Description	Forklift weighing for simple applications with limited data integration.	Forklift weighing with advanced connectivity and data integration.
Data Interface	IND236 for forklifts	Smart PC
Data Interface Connection	Cable	Bluetooth
Data Transmission	Bluetooth (optional)	Bluetooth, WiFi

Data Management Requirements

Simple Weighing with Manual Processing	•	
Automatic Data Transfer to Third Party Devices		•
Fully Integrated Data Management via Smart PC		•
Full Operator Guidance Displayed on Smart PC		•
Onboard Data Merging		•

Technical Specifications

Capacity	1,500 / 2,000 / 3,000 / 5,000 kg 3,000 / 5,000 / 7,500 / 10,000 lbs
Resolution	1,000 ~ 1,500e
Stable Weighing Time	1 – 2 seconds
Angular Compensation Range	Pitch $\pm 5^\circ$, Roll $\pm 3^\circ$
Overload	Safe overload: 150% / limited overload: 300%
Capacity Loss	~15% of forklift capacity
IP Protection	IP65 for electric parts
More Information	www.mt.com/VFS120 www.mt.com/TLF820

RPA345 Economic Paint Scale

Simplified and Flexible Paint Mixing

The RPA345 from METTLER TOLEDO is an economical, flexible paint mixing scale designed for the automotive refinish market. The high-resolution display, tilt-enabled screen and simple connectivity allow for more efficient and easy operation in body shops. Built-in formulation software with guided steps simplifies processing and ensures high quality output every time.

► www.mt.com/ind-paint-mixing-scale

Your Formulas at Your Fingertips
Leverage the Bluetooth module and send a formula or job from your mobile device directly to the scale. This eliminates cumbersome paper recipes and speeds up the time required to obtain the formula so that you can simply start weighing.



Boost Productivity

A large high-resolution graphical display enables operators to read measurements and prompts effortlessly, which makes the process easy to follow and reduces mixing time and errors.



Increase Mix Quality

RPA345 manages formulas and jobs automatically, so operators can focus on mixing. Automatic recalculation enables quick adjustment to complete accurate batches and prevent costly waste.



Maximize User Ergonomics

The easily adjustable screen maximizes ergonomic operation. Duplicate buttons for zero and tare simplify right- and left-handed use so that all users have a clear view of the screen during the process.



RPA345 Technical Specifications

Metrological Data

Capacity	7500 g / 999.95 g
Readability	0.1 g / 0.05 g
Tare Range	-7500 g
Ambient Temperature Range	0 ~ 40 / 32 ~ 104
Power-on Zero Range	± 750 g

Dimensions / Weight

Weighing Platter	234 mm
Housing (WxDxH)	234 x 309 x 365 mm
Scale Net Weight	Approximately 3.3 kg

Display / Language

Display (Keyboard)	Mono LCD graphic display / Membrane keypad
Language	English, Chinese, Portuguese

Power Supply

Power Supply	USB 2.0 or higher or AC adapter PSAI05R-050QL6
Input Voltage Power Consumption	5 VDC / 5 W

Interface Connectivity

Connectivity Options	USB or Bluetooth
-----------------------------	------------------

IP / Overvoltage / Pollution

IP Protection	IP40 in accordance with EN 60529/IEC 60529
Overvoltage Degree	IP40 in accordance with EN 60529/IEC 60529
Pollution Degree	IP40 in accordance with EN 60529/IEC 60529


RPA455 Smart Paint Scale

For Consistent Paint Mix Quality

The RPA455 is a family of smart paint scales are designed for the automotive refinish market. This solution brings a new level of comfort and functionality into the automotive body shop. Its intuitive and easy-to-use interface helps to increase productivity and reduce processing time, and it offers USB and Ethernet compatibility for flexible and fast connectivity.

► www.mt.com/ind-paint-mixing-scale

Integrated Formula Management – 4 Simple Steps to Mix Your Paints:

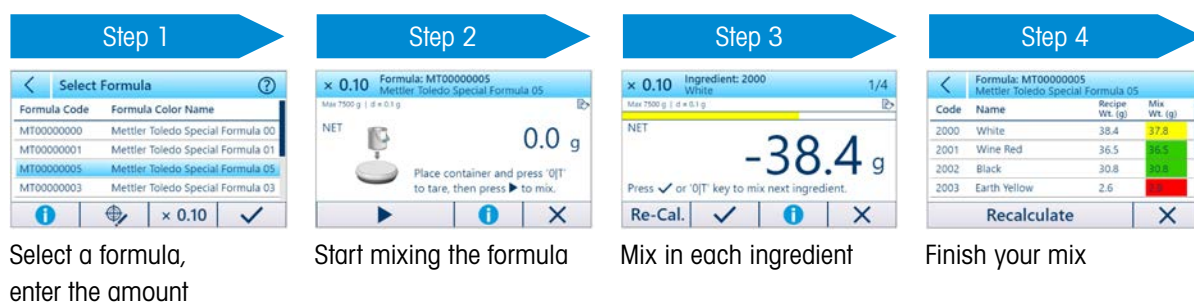

Intuitive User Interface

The user-friendly interface offers a bigger display with TFT color touchscreen for easy viewing of mix information and alerts. This allows customers to manage formulas with guided processes, eliminating potential errors.



Modular and Adaptable

Modular design provides complete flexibility to build the ideal configuration. Select required components to benefit from flexible placement, resulting in reduced cost to setup solutions.



Flexible Connectivity

The standard USB communication port can easily be upgraded to Ethernet, enabling communication to the network or cloud server for painless data transfer.



RPA455 Technical Specifications

Metrological Data

Capacity	7500 g / 999.95 g
Readability	0.1 g / 0.05 g
Tare Range	-7500 g
Ambient Temperature Range	0 ~ 40 / 32 ~ 104
Power-on Zero Range	± 750 g

Dimensions / Weight

Weighing Platter	234 mm
Housing (WxDxH)	234 x 309 x 365 mm
Scale Net Weight	Approximately 3.3 kg

Display / Language

Display (Keyboard)	Colorful TFT LCD Capacitive Touch Screen
Language	English, Chinese, German, French, Spanish, Portuguese

Models / Application Area / Hazardous Area Approvals

RPA455	Non-Hazardous Area		
RPA455x	EX Zone 1 / Class I, Div. 1	EICEx	Ex ib IIB T4 Gb
		ATEX	II 2G Ex ib IIB T4 Gb
		FM (USA / Canada)	IS CL I, Div 1, GP C, D T4 CL I, Zone 1, AEx / Ex ib IIB T4 Gb
RPA455xx	Ex Zone 2	IECEx	Ex ic IIB T4 Gc
		ATEX	II 3G Ex ic IIB T4 Gc

Power Supply

Power Supply	USB 2.0 or higher or AC adapter PSAIO5R-05OQL6
Input Voltage	5 VDC /
Power Consumption	5 W
USB Power and Data Barrier	Energy limiting unit included

Interface Connection

USB Standard and Ethernet optional

IP / Overvoltage / Pollution

IP Protection	IP40 in accordance with EN 60529/IEC 60529
Overvoltage Degree	IP40 in accordance with EN 60529/IEC 60529
Pollution Degree	IP40 in accordance with EN 60529/IEC 60529




ADI856 HD Touchscreen System

The Right Color at Your Fingertips

With a large HD color touchscreen display, ADI856 gives you the ability to mix paint using your PC more easily than ever before. You can control the entire process from the solvent-resistant touchscreen display. The touchscreen display comes standard in an easy-clean, stainless-steel housing. ADI856 works with all standard PCs and is compatible with all paint and office-software packages.

► www.mt.com/ADI856

In the refinishing industry, obtaining the perfect color match for the job is critical. Even the smallest drop can make a difference. The ADI856 HD touch-sensitive display mirrors the information from your remote PC, allowing you to control the formulation software from the mixing room. This provides quick and accurate results.

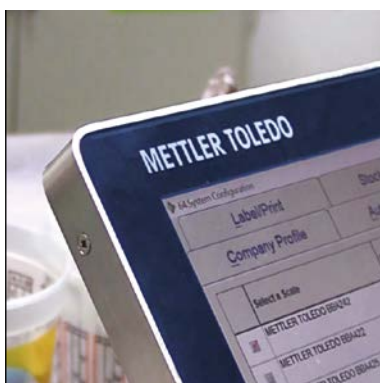

Large HD Touchscreen Display

The 15.6" HD color display is easy to read and can be adjusted to avoid glare. The bright color display allows you to easily select the right formula for your job.



True Industrial Design

ADI856 is simple to install and works with all standard PCs. It has been developed for the ruggedness of the automotive body-shop environment.

CUSTOM FORMULA			
A743 CF - 128 OUNCES PAINT FORMULA			
Product No	Product Description	Non Accum Amount	
1531	RED		
1542	LEAFREE YELLOW	1,853.7	
1548	ORANGE	1,226.2	
1549	WHITE	424.3	
1552	BLACK	293.0	
		4.7	

Direct Scale Integration

Our intrinsically safe BBA242 paint scales can be connected directly to the ADI856, providing complete control of the scale and paint-mixing software.



Safe to Use

ADI856 Touch Screen Scale Indicator

The ADI856 is fully approved for use in hazardous areas classified Class I Division 1.

ADI856 Display Unit

Screen Size	15.6"
Resolution (Pixels)	1,920 x 10,080 (Full HD), 1,366 x 765, 800 x 600
Approvals	FM Class I, Division 1, Group C, D The METTLER TOLEDO ADI856 Touch Display System has been tested and certified by FM Approvals LLC for IntecPC LTD, Poynton, SK12 1 PQ, UK
Atmospheric Humidity	Max. 80%
Temperature Range	Operation: 32–110 °F (0–40 °C) Storage: 0–120 °F (-20–50 °C)
Connectivity	Local connection to METTLER TOLEDO scales BBA242 and Panda 7
Weight	20lbs (8.5 kg)

ADI856 Interface

Interface Cable	15 m
Temperature	Operation: 14 – 110 °F (-10 – 40 °C) Storage: 0 – 120 °F (-20 – 50 °C)
Atmospheric Humidity	Max. 80%
Weight	4lbs (2 Kg)

Power Supply

Operating Voltage	90VAC – 264VAC @50 – 60Hz
Power Consumption	25W typ
Power Cable	Grounding-type plug with neutral conductor



SmartShelf Weighing Pads


Remote Inventory Management

Weighing sensors are the perfect tool to remotely monitor inventory levels. They can be integrated into shelves, racks, industrial vending machines or jobsite containers. All weighing electronics have digital connectivity for easy integration into your existing network, and remote computer access allows you to check stock and analyze usage trends for easy supply-chain optimization anywhere, anytime.

► www.mt.com/SmartShelf

Make Your Inventory Shelf Talk

With the direct integration of A/D converters close to the weighing point, you get stable and easy-to-use digital communication of stock levels. This simple integration ensures you never run out of stock for smoother processing and happier customers.

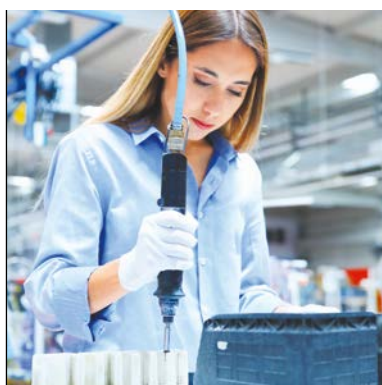

Track Your Valuables

Weighing is very useful for tracking all material types that cannot be dispensed or controlled in traditional ways. Vending machines offer full accountability, saving valuable assets from excessive use.



Eliminate Wait-Time

Digital communication allows you to set inventory levels, which enables automatic replenishment, keeping operations stable and reducing or eliminating wait-time for parts and components.










Reduce Picking Errors

Use SmartShelf to determine the correct extraction of parts by weight to ensure that every kit contains the correct items and quantities. This allows you to implement an error-free process.



The SmartShelf portfolio offers maximum flexibility.

	Complete Shelves	Capacity	Resolution
	6 Pads SmartShelf	6 x 8 kg or 6 x 25 lb	0.002 kg or 0.01 lb
	4 Pads SmartShelf	4 x 20 kg or 4 x 50 lb	0.01 kg or 0.2 lb
	1 Pad SmartShelf	100 kg or 250 lb	0.05 kg or 0.1 lb
	Bench Scale	600 kg	0.5 kg
	Floor Scale	1000 kg	0.5 kg

	SmartShelf Weighing Pads	Capacity	Resolution
	Weighing Pad	2 kg / 8 kg / 25 kg or 5 lb / 25 lb / 50 lb	0.001 kg / 0.005 kg / 0.01 kg or 0.002 lb / 0.01 lb / 0.02 lb
	High Resolution Weighing Pad	8 kg / 15 kg or 15 lb / 30 lb	0.1 g / 0.5 g or 0.0002 lb / 0.001 lb

BC Scale Family

Perfect for Letters and Parcels

BC scales are designed to provide postal, carrier and express applications with faster processing, better accuracy and easier set-up. BC scales feature analog and digital load cells with advanced compensation and multi-interval capabilities. They are simple to set up and operate thanks to USB connectivity, an intuitive display menu and an easy-to-use boot-up wizard. The wizard facilitates initial installation by prompting for required parameters.


► www.mt.com/ind-bc-scale

The BC scale is a true global platform for postal and shipping applications. The large graphical display provides easy customization and flexibility for the scale to meet local requirements.



Communications to Meet Connectivity Requirements

BC scale supports Carrier serial protocols, plug and play USB, OPOS drivers, Ethernet for cloud or server based applications and Bluetooth for wireless mobility communication.

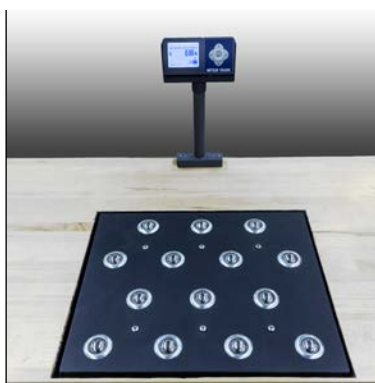

Flexible Configuration

Scales are adaptable with special capacity and increment sizes, multiple display options and special platter designs to allow faster parcel processing.



Processing Letters and Parcels in One Self-service Kiosk Scale

Kiosk scales are utilized with no display or a remote mounted display. All functions including calibration can be done through the scale communications.



Courtesy of precision warehouse design



Rugged and Reliable Design

BC scales offer high durability and long life due to all-metallic frames and heavy-duty overload protection. A single scale can weigh light envelopes with high precision, while robust overload protection allows the same scale to handle the shock of heavy parcels.



The solid frame of a
METTLER TOLEDO BC scale



**Measurement
Canada**
An Agency of
Industry Canada




**Mesures
Canada**
Un organisme
d'Industrie Canada

BC Scales Model Overview

Optimized for Accuracy and Simplicity

METTLER TOLEDO offers a broad range of scales for postal, carrier and express environments for faster processing, better accuracy, and easier set-up.

► www.mt.com/ind-bc-scale

	BC-15U	BE-30, BC-3L	BC-6LU
			
Applications	<ul style="list-style-type: none"> • Basic weighing • Tare • Bulk mail counting 		<ul style="list-style-type: none"> • Differential weighing of letters from a bin • Display weight and price
Key Feature	Provides high resolution required for shipping via Global Posts & USPS		
Attributes	Simple set-up and operation, high accuracy, functional durability, flexible communication, flexible configuration		
Capacity	30 lb / 15 kg	70 lb / 35 kg	150 lb / 60 kg
Readability	0–15 lb x 0.1 oz 15–30 lb x 0.2 oz, or 30 x 0.01 lb	0–7 lb x 0.1 oz 7–70 lb x 0.2 oz	0–10 lb x 0.1 oz 0–70 lb x 0.2 oz 0–149 lb x 0.5 oz
	0–3 kg x 0.001 kg 3–15 kg x 0.005 kg	0–3 kg x 0.001 kg 3–6 kg x 0.002 kg 6–35 kg x 0.01 kg	0–15 kg x 0.005 kg 0–30 kg x 0.01 kg 0–60 kg x 0.02 kg
Frame	Steel plate	Die cast aluminum	Die cast aluminum
Platter Construction	ABS plastic (dished), stainless steel	ABS plastic (dished), stainless steel	ABS plastic (dished), stainless steel, ball top
Dimensions (Flat Top)	10.9 x 11.6 in 270 x 290 mm	11.8 x 13.8 in 300 x 350 mm	11.8 x 13.8 in 300 x 350 mm
Approvals	EC / OIML, NTEP / MC	EC / OIML, NTEP / MC	EC / OIML, NTEP / MC
Alibi Memory	Alibi	Alibi	Alibi
Standard PC Communication	USB, RS232, virtual serial, keyboard wedge		
Optional Communication	Bluetooth, Ethernet (as special)	Bluetooth, Ethernet	Bluetooth, Ethernet
More Information	www.mt.com/ind-bc-scale		



Robust and Flexible for Shipping and Mail Operations

A balance of performance and value through accuracy, durability, ease of use, and versatile communications.

► www.mt.com/ind-bc-scale-brochure

BC-30U



BC-60U



BC-150U



- Counting of small parts for packing stations
- Product verification for packing stations
- Label offset to compensate for packing lists / Label applied after final weighing

Superb reliability for retail stores, mail rooms, warehouse packing stations and shipping departments

Simple set-up and operation, high accuracy, functional durability, flexible communication, flexible configuration

70 lb / 30 kg

150 lb / 60 kg

150 / 300 lb / 60 / 150 kg

0.05 lb
0.01 kg

0.05 lb
0.02 kg

0–150 x 0.05 lb
0–300 x 0.1 lb

0–60 x 0.02 kg
0–150 x 0.05 kg

Die cast aluminum

Die cast aluminum

Tubular steel frame

ABS plastic (dished),
stainless steel

ABS plastic (dished), stainless
steel, ball top, roller top

Stainless steel, ball top,
roller top

12.3 x 13.9 in
300 x 350 mm

12.3 x 13.9 in
300 x 350 mm

16.5 x 20.5 in
400 x 500 mm
650 x 550 mm (Special)
800 x 600 mm (Special)

EC / OIML, NTEP / MC

EC / OIML, NTEP / MC

EC / OIML, NTEP / MC

Alibi

Alibi

Alibi

USB, RS232, virtual serial, keyboard wedge

Bluetooth, Ethernet

Bluetooth, Ethernet

Bluetooth, Ethernet

www.mt.com/ind-bc-scale



BC-60U: Rotate parcels easily with BC ball top platter to allow faster scanning of barcodes.



BC-150U: BC roller top scale with conveyor Drop-in kit for easy mounting in a roller conveyor.



Pre-fabricated stainless steel mounting kit provides for easy installation in counter tops with minimal engineering. The remote tower display has enhanced visibility with large font – 20 mm.

Overhead Rail and Wall Scales

Processing Beef, Pork or Lamb

Overhead rail scales for loads from 150 to 1,200 kg can be integrated easily into various types of conveyor systems to facilitate precise, rapid carcass weighing.

- www.mt.com/wall-scale
- www.mt.com/overhead-monorail

Watch the video to learn how platform design enables the highest precision – and how this can help you improve your weighing, ensure consistent quality, increase productivity and meet regulations.



DSO

Overhead Monorail Scale



DSO scales can be easily integrated regardless of the type of rail system used, as both versions offer a universal adaption plate that can be installed above and around the rail.

Resolution	Approved: 1 x 3,000e single range Non-approved: up to 15,000d (depending on the application/vibrations)
Capacity (kg) / Readability Approved (g)	150 / 50 300/100
Dimensions (mm)	Weighing rail insert length: 200, 300, 400; Flexible adaptation plate
Scale Material	Hot galvanized
Protection	IP65
Interfaces	Scale interface: analog
Accessories	–
Suitable Scale Indicators	ICS4_9, ICS6_9, IND570, IND780, IND930, IND970 and more

DO

Overhead Monorail Scale



The DO300 overhead rail scale is equipped with two strain-gauge weighing cells and is designed for weighing up to 300 kg. The rugged and torsionally rigid unit is fixed below the mounting support.

MO

Overhead Monorail Scale



A hybrid digital strain-gauge weighing cell and lever-arm system means rail inserts can be detached so vibrations do not affect results. The standard rail insert support is suitable for conventional tubular systems, while the universal support and adaption plate ensure easy integration into many rail-system types.

DW

Wall Scale




A space-saving, compact wall scale is ideal for weighing partial loads or half-carasses. The unit's stainless-steel hinged plate, casing and gallows hook ensure compliance with stringent hygiene regulations. Depending on the installation, mounting kits are available. A bench stand is also available and an optional meat hook can be secured vertically in two positions.

	Approved: 1 x 3,000e single range Non-approved: up to 15,000d (depending on the application/vibrations)	Approved: 3 x 3,000e multi interval (available Q3/2017); Non-approved: up to 30,000d (depending on the application/vibrations)	Approved: 1 x 3,000e single range
	300 / 100	600 / 200, 300 / 100, 150 / 50 1,200 / 500, 600 / 200, 300 / 100	150 / 50
	Weighing rail insert length: 600, 800, 1,000	Weighing rail insert length: 800, 1,000 Flexible adaptation plate	Plate size: 600 x 400
	Hot galvanized	Hot galvanized (Powder-coated lever arms)	Finish on visible surfaces: Stainless steel (AISI 304); Finish hinged plate support/internal frame: Hot galvanized
	IP65	IP67	IP67
	Scale interface: analog or digital	Scale interface: digital	Scale interface: analog / digital
	–	Adaption plate; Standard weighing rail insert support; Universal rail insert support; Weighing rail inserts; Tubular track adapters; Elbows small / large	Dowel installation kit; Screw-through mounting kit; Gallows with meat hook; Bench stand
	ICS4_9, ICS6_9, IND570, IND780, IND930, IND970 and more	ICS4_9, ICS6_9, IND570, IND780, IND930, IND970 and more	ICS4_9, ICS6_9, IND570, IND780, IND930, IND970 and more



Our Solutions For Your Production

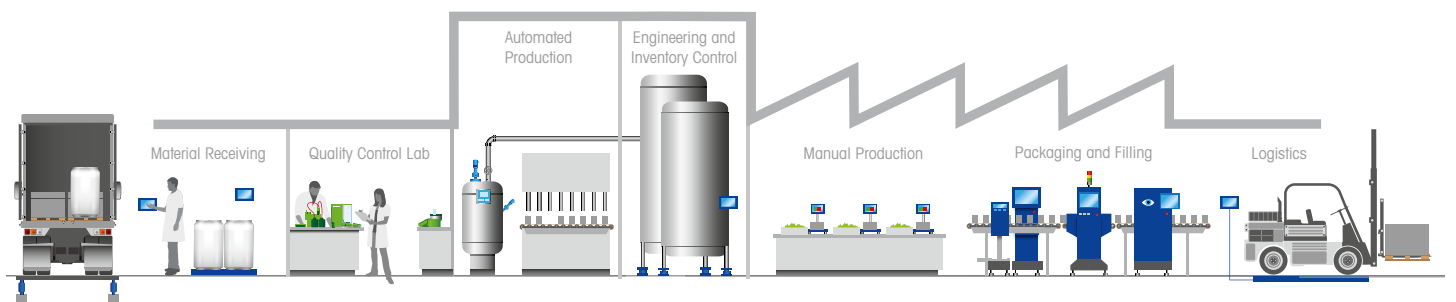

Barriers and Converters Connecting

Completing Your Solution

188

Reliable Printing Solution

For Industrial Weighing Applications

190

ACM360 Bluetooth Adaptor

Fast and Flexible Peripheral Connectivity

192



► **Weights** – For More Information, See Page

290

Barrier and Converter Connections

Completing Your Solution

Expanding weighing system connectivity may require a METTLER TOLEDO accessory designed for the purpose. These easy-to-integrate add-ons enable creation of a custom solution that fits your process needs.

	A100 Provides 4–20 ma signal based on continuous weight output from a scale indicator. 	ARM100 Remote I/O module for use with compatible METTLER TOLEDO scale indicators. 
	<ul style="list-style-type: none"> • Flexible usage 4–20 ma output plus setpoint outputs with HI and LO LEDs • Suitable for installation to Din rail or on wall/column Optional IP65 stainless-steel enclosure, material #64053670 	<ul style="list-style-type: none"> • 4 inputs / 6 outputs Optically isolated inputs, 5–24 VDC Dry contact relay outputs, 250 VAC 1A • Suitable for installation to Din rail or on wall/column Optional IP65 stainless-steel enclosure, material #64053670
Compatible With	METTLER TOLEDO scale indicators with continuous weight output or SICS level 0 communication	IND560, IND570, IND780, IND930, IND970
Operating Voltage	24VDC	24VDC
Data Communication	RS-232, RS-485, or 20 mA current loop or fiber optic	RS485
Dimensions	74 x 100 x 57 mm (W x H x D)	74 x 100 x 57 mm (W x H x D)
IP Rating	IP20 (IP65 / Type 4 with optional 64053670 stainless-steel enclosure)	IP20 (IP65 / Type 4 with optional 64053670 stainless-steel enclosure)

ISB05/ISB05x

Hazardous-area barrier for use with scale indicators having 5V load cell excitation.



DIN Rail version

Ex flameproof housing

- **Global regulatory approvals**
Enables scale indicators to provide a safe power level to scales in a hazardous area
- **Models for installation in Non-hazardous (ISB05) or Hazardous (ISB05x) area**
Cast aluminum Ex flameproof enclosure for use in Zone 1/21 or Div 1 area

+1 to +5 VDC analog load cell excitation circuit

Powered from scale indicator

-

110 x 115 x 35 mm

IP20

ISB15/ISB15x

Hazardous area barrier for use with scale indicators having up to 15V load cell excitation.



DIN Rail version

Ex flameproof housing

- **Global regulatory approvals**
Enables scale indicators to provide a safe power level to scales in a hazardous area
- **Models for installation in Non-hazardous (ISB15) or Hazardous (ISB15x) area**
Cast aluminum Ex flameproof enclosure for use in Zone 1/21 or Div 1 area

+5 to +15 VDC analog load cell excitation circuit

Powered from scale indicator

-

110 x 115 x 35 mm

IP20

150 x 195 x 140 mm

IP66

150 x 195 x 140 mm

IP66

Reliable Printing Solution

For Industrial Weighing Applications

Ticket and label printers allow you to reliably capture weighing and process data for easy documentation. Simple integration with your weighing systems makes installation and use effortless. Optimize your printer and peripherals with METTLER TOLEDO software to design labels and store custom templates to printers and indicators.

► www.mt.com/industrial-printers

APR320

Smart, slim ticket printer



- **Easy Plug-and-Print setup**

Do not waste time with complicated setup requirements. It seamlessly integrates with most METTLER TOLEDO weighing indicators using a variety of modern connection options.

- **Save time, reduce contamination**

Lightning-fast printing, simplified paper replacement and proactive maintenance alerts keep your operation running at maximum efficiency.

APR331

Safe, convenient label printer



- **Save time, reduce contamination**

This unit's stainless-steel housing and optional rubber gasket for closing the paper opening facilitate fast, thorough and easy cleaning.

- **Flexibility for easy use**

The simple design allows this printer to be placed near a wall, under a desk or wherever it fits best in your individual workplace.

Printing Technology	Dot Matrix	Direct Thermal
Display	1.6 in LCD	No
Standard interface	USB-B2.0, RS232, Ethernet	RS232
Resolution	42 columns (7 × 9)	203 dpi
Media types	Paper Roll	Paper Roll, Labels
Media width	Min. 44 mm – Max. 76.2 mm (1.8 – 3.0 in)	50.8 mm (2.0 in)
Media thickness	Min. 0.06 mm – Max. 0.085 mm (0.002 – 0.003 in)	Min. 0.076 mm – Max. 0.20 mm (0.003 – 0.008 in)
Printer command languages	ASCII, ESC/POS	ASCII
Printer Software	Ticket+	No
Dimensions (L × W × H)	205 mm × 140 mm × 83.5 mm	192 mm x 156 mm x 91 mm
More Information	www.mt.com/APR320	www.mt.com/APR331



Print and Record Your Weighing Result

Make your printing accurate, simple and smart.

► www.mt.com/industrial-printers

APR430

Compact, durable label printer



APR530

Intelligent, high-speed label printer



• Simple Plug-and-Print setup

MT Mode and Automatic Baud rate match allows the APR430 to be plugged into any METTLER TOLEDO indicator out of the box.

• Application versatility

The APR430 is a thermal transfer printer that can be used in direct thermal mode. This means that you have the choice of using high quality labels for long term storage or low cost direct thermal labels for short term use.

• Easy label customization

Quickly switch between the resident 15 MT formats using the printer touchscreen or with MT Label+, the free label creation tool from METTLER TOLEDO. If the standard printout doesn't work, use Label+ to quickly create MT mode labels for a fully customized printout.

• Remote print capability

This printer is designed with a remote print soft key allowing you to print in a safe room or operator's booth away from the indicator.

Direct Thermal or Thermal Transfer

No

USB-B2.0, RS232, Ethernet

203 dpi

Paper Roll, Labels

Min. 25.4 mm – Max. 118 mm (1 – 4.64 in)

Min. 0.076 mm – Max. 0.20 mm (0.003 – 0.008 in)

ASCII, EZPL, GEPL, GZPL, GDPL auto switch

Label+

251 mm x 200 mm x 164 mm (9.88 in x 6.46 in x 7.87 in)

www.mt.com/APR430

Direct Thermal or Thermal Transfer

3.2 in LCD touch screen

USB-B2.0, RS232, Ethernet, Parallel Port

300dpi

Paper Roll, Labels

Min. 20.0 mm – Max. 118 mm (0.79 – 4.64 in)

Min. 0.076 mm – Max. 0.20 mm (0.003 – 0.008 inch)

ASCII, EZPL, GEPL, GZPL, GDPL auto switch

Label+

280 mm x 210 mm x 195 mm (11.0 in x 8.3 in x 7.7 in)

www.mt.com/APR530

ACM360 Bluetooth Adaptor

Fast and Flexible Peripheral Connectivity

The ACM360 is an industrial solution to connect peripherals such as printers or other Bluetooth 4.x Android smart devices to any METTLER TOLEDO scale indicator in a fast and convenient way. In addition to establishing indicator-to-indicator communication, the ACM360 is designed to provide an undisturbed wireless connection in rough environments.

► www.mt.com/ACM360-M1

► www.mt.com/ACM360-D1

Easy Installation and Pairing

Installing the ACM360 Bluetooth adaptor is simple. Just press the multifunction key sequentially or use the PC tool to pair and configure it and you are ready to go. An included mounting bracket allows the adaptor to be positioned almost anywhere. This makes the ACM360 a truly versatile wireless solution.




Low Power Consumption

The ACM360 is Bluetooth version 4.1 and it is powered directly via the scale indicator's RS232 interface. No additional power supply is needed.



Flexible Label Printing

The adaptor stores up to 10 different label templates. This feature is a practical solution for easy printing, especially for our economic scale indicators.



Intelligent LED Interfacing

The LED scale indicator changes colors depending on the status of the device. Press the multifunction key for immediate status feedback.



Multiple applications overview

Versatile Wireless Solution


ACM360 Bluetooth Adaptor

Fast and Convenient Wireless Connection

Bluetooth Version	Bluetooth version 4.1 (only compatible with Bluetooth version 4.x device)
Average Power Consumption	10 mA; ~50 mW
Standard Communication Distance	~10 m (powered via RS232 signal)
Baud Rate	4,800, 9,600, 19,200, 38,400, 57,600, 115,200 bps
Work Mode	SPP or Label Template (ZPL)
Housing	ABS
Ingress Protection	IP54 (DB9 version), IP65 (M12 version)
Power Supply	RS232 signal or 5 ~ 9 VDC from RS232 Pin 9



Our Solutions For Your Production

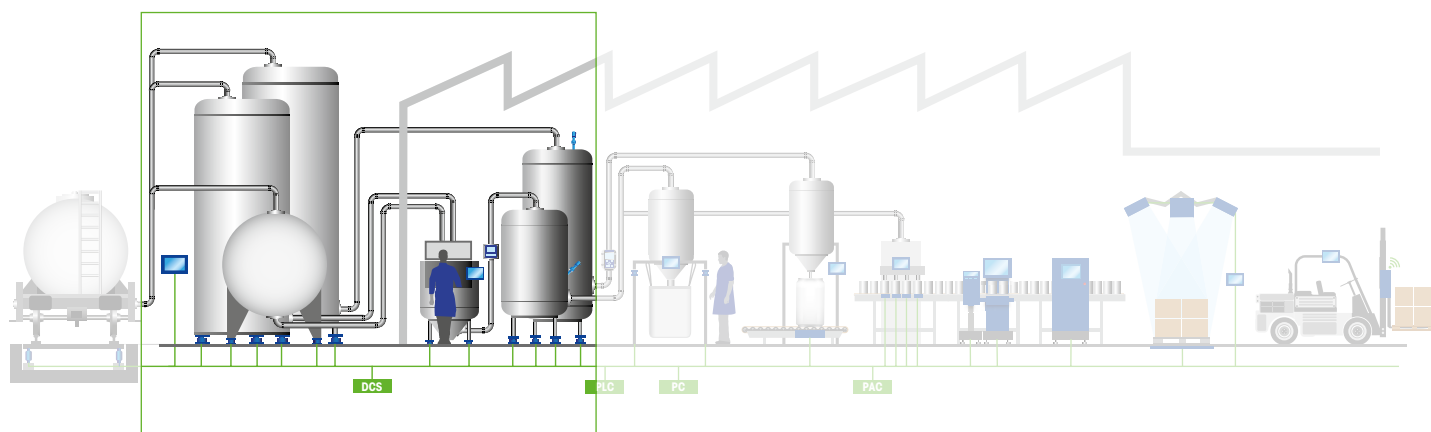

Weigh Modules and Load Cells

7

Weigh Modules

Tank Weighing Made Easy	196
Multi-Purpose Weigh Modules – Right the First Time	196
PowerMount Weigh Modules – Know What's Ahead	200
Specific-Purpose Weigh Modules – Cope with Extremes	204
Weigh Modules Accessories – Match the Application	208

Load Cells

High Quality and Technology	210
Load Cells – When Accuracy Matters	210
Single-Beam Load Cells – Convert Structures to Scales	212
Load Cell Accessories – Easy Integration	214
Canister/Ring Load Cells – Robustness for Harsh Environments	216
S-Beam Load Cells – Scales for Suspended Structures	218
Single-Point Load Cells – Easy System Integration	220

▶ Scale Indicators for Tank- and Hopper-Scales – For More Information, See Page	22
▶ Transmitters – For More Information, See Page	44

Multi-Purpose Weigh Modules

Right the First Time

Tank weighing made easy. SWB505 MultitMount and SWC515 PinMount weigh modules are designed to fulfill broad application requirements for process tanks, storage silos and conveyor weighing. Suitable for high-precision requirements, they are available in resolutions up to OIML C6/NTEP 10,000 d. Three material selections allow use in various environments.

► www.mt.com/compression-wm

360-degree checking is a key for superior safety. Independent of weigh module orientation, maximum safety ratings are achieved.



Superior Safety

High mechanical safety, 360° checking, drop down protection and lift-off protection keep the tank in place.



Easy Integration

Safelock avoids load-cell overload during shipping and installation.



Helpful Accessories

Agitators, hot tanks, vibration and shock loading, the right accessories are available for even extreme cases.



Fully Specified Safety Ratings

Silo and tank scales are critical in terms of safety. Tipping can lead to human injury, product loss and financial damage. To support mechanical safety calculations, METTLER TOLEDO weigh modules are fully specified to normal, yield and ultimate limits. All values are verified by real physical testing (picture). Yield limits are typically used for dimensioning against infrequent events such as heavy-wind loads, while ultimate limits are used for one-off events such as severe earthquakes.



Check Out RapidCal™
New Tank Scale Calibration

More information on page 284
► www.mt.com/ind-rapidcal



Multi-Purpose Weigh Modules

Right the First Time

SWB505 MultiMount and SWC515 PinMount provide broad application capabilities for silo, tank, hopper and conveyor scales. With the right accessories, they cope with agitators, hot contents, vibrations and shock loading.

► www.mt.com/compression-wm

SWB505 5 kg – 300 kg




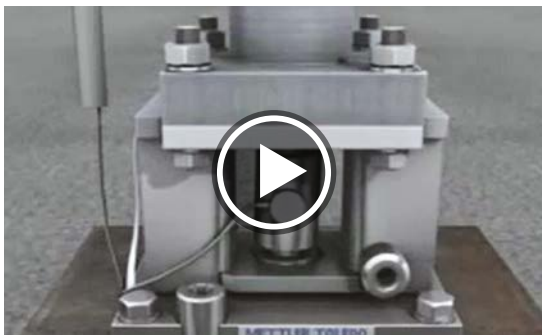
- **Reliable**
IP68/IP69K load cell for best possible reliability
- **Easy operation**
Safelock supports the installation process and makes it impossible to overload the load cell

SWB505 110 kg – 4,400 kg



- **High accuracy available**
OIML C6, NTEP III M10 version for high accuracy
- **Easy operation**
Safelock supports the installation process and makes it impossible to overload the load cell

Applications	Low capacity process weighing, pharma CIPs	Regular to high performance process tank weighing
Accuracy	OIML C3, C6, NTEP 5,000	OIML C3, C6; NTEP 5,000, 10,000
Hazardous Area Approvals 	ATEX, FM, IECEx, Nepsi	ATEX, FM, IECEx, Nepsi
Material	Zinc plated, 304 stainless, 316 stainless	Zinc plated, 304 stainless, 316 stainless
360° Checking	Yes	Yes
Safe Lock	Yes	Yes
Accessories	Agitators, hot tanks, vibration/shock, dummy applications	Agitators, hot tanks, vibration/shock, dummy applications
Protection	IP68 / IP69K	IP68 / IP69K
More Information	www.mt.com/compression-wm	www.mt.com/compression-wm



Watch the Video

Learn the key values of multi-purpose weigh modules:

- Easy installation
- Safety features
- Stabilization
- Upgrade to PowerCell

► www.mt.com/ind-wm-values-video

SWC515 7.5 t – 50 t



- **Low profile**

PinMount provides low profile to easy integration and retrofit

- **Easy operation**

Safelock supports the installation process and makes it impossible to overload the load cell

Large process tanks, silos

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Zinc plated, 304 stainless, 316 stainless

Yes

Yes

Agitators, hot tanks, vibration/shock, dummy applications

IP68 / IP69K

www.mt.com/compression-wm

SWC515 100 t – 300 t



- **Compact and strong**

Although very compact the load ratings are extremely high for superior safety

- **Easy to integrate**

Safelock supports the installation process and makes it impossible to overload the load cell

Storage silos

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Zinc plated, 304 stainless

Yes

Yes

Agitators, hot tanks, vibration/shock, dummy applications

IP68 / IP69K

www.mt.com/compression-wm

PowerMount Weigh Modules

Know What's Ahead

PowerMount Weigh Modules use POWERCELL technology for its superior performance and condition monitoring features. Each POWERCELL reports its condition and an alarm is created when problems occur. This makes manufacturing more reliable by making sure failures do not go unrecognized and cause out of specific production.

► www.mt.com/ind-powermount

RunFlat

In the rare case of load cell failure, Run-Flat allows simulation of the faulty load cell. Operation can continue until the problem is solved. This reduces downtime as much as possible.




Superior Safety

High mechanical safety, 360° checking, drop down protection and lift-off protection keep the tank in place.



No Junction Box

PowerMount uses a daisy-chain network and thus does not need junction boxes, which is a great improvement in terms of reliability.

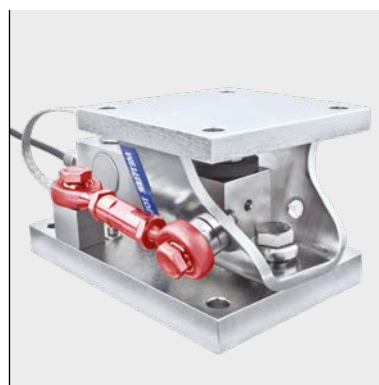

Helpful Accessories

Agitators, hot tanks, vibration and shock loading, the right accessories are available for even extreme cases.



OIML C10 Accuracy

When accuracy really matters, PowerMount Weigh Modules are available in C10 accuracies three times better than usual. This is possible because POWERCELL load cell errors are actively adjusted to the correct value by an inbuilt microprocessor. Electromagnetic impacts are also under control with PowerMount.



Check Out RapidCal™
New Tank Scale Calibration

More information on page 284
► www.mt.com/ind-rapidcal






PowerMount Weigh Modules

Know What's Ahead

SWB605 and SWC615 PowerMount weigh modules allow you to control processes and predict potential trouble before serious costs occur. They are available in superior accuracy up to OIML C10, NTEP 10,000 d. CalFree™Plus provides the most accurate calibration method without the use of test weights.

► www.mt.com/ind-powermount

	SWB605 220 kg – 4,400 kg	SWC615 7.5 t – 50 t
		
	<ul style="list-style-type: none"> • Predictive maintenance Monitors load cell conditions; alarms in case of failure • Superior accuracy Due to in-built digital error compensation PowerMount achieves exceptional accuracy 	<ul style="list-style-type: none"> • Predictive maintenance Monitors load cell conditions; alarms in case of failure • Superior accuracy Due to in-built digital error compensation, PowerMount achieves exceptional accuracy
Applications	High-performance process weighing	High-performance process weighing
Accuracy	OIML C3, C6, C10; NTEP 5,000, 10,000	OIML C3; NTEP 5,000
Hazardous Area Approvals 	ATEX, FM, IECEx, Nepsi	ATEX, FM, IECEx, Nepsi
Material	Zinc plated, 304 stainless, 316 stainless	Zinc plated, 304 stainless, 316 stainless
360° Checking	Yes	Yes
Safe Lock	Yes	Yes
CalFree-Plus, Push-Button Calibration	Yes	Yes
Accessories	Agitators, hot tanks, vibration/shock, dummy applications	Agitators, hot tanks, vibration/shock, dummy applications
Protection	IP68 / IP69K	IP68 / IP69K
More Information	www.mt.com/compression-wm	www.mt.com/compression-wm



Watch the Video

Learn the key values of PowerMount Weigh Modules:

- Predictive maintenance
- Superior accuracy
- Easy integration

► www.mt.com/ind-powermount-video

SWC615 90 t – 300 t



- **Extended predictive maintenance**

Monitors load cell voltage, temperature, breach and alarms in case of failure

- **Superior accuracy**

Due to in-built digital error compensation PowerMount achieves exceptional accuracy

High-performance silo weighing
OIML C3; NTEP 5,000
ATEX, FM, IECEx, Nepsi
Zinc plated, 304 stainless
Yes
Yes
Yes
Agitators, hot tanks, vibration/shock, dummy applications
IP68 / IP69K
www.mt.com/compression-wm



Specific-Purpose Weigh Modules

Cope with Extremes

When standard weigh modules are not suitable, these special products provide solutions. Hygienic design, low-profile, ultra-high capacity, redundant weighing or suspended hoppers – they cover them all. METTLER TOLEDO sales experts can help you find the best solution to your individual situation. Professional installation and calibration is provided by our service team.

► www.mt.com/weigh-modules

Hygienic Weigh Module

For food and pharmaceutical applications where contamination risk shall be minimized. All surfaces are mirror polished and self draining, open metal-to-metal contact is avoided. Weigh module is NSF and GMP certified.



Low Profile

These modules' 60–100 mm (2.3–4 inch) height can be integrated even when space is tight.



Tension Weigh Module

These modules convert suspended hoppers into reliable weighing devices, with all necessary features for easy implementation and accuracy.



Heavy Capacity


For storage silos beyond 200 t, METTLER TOLEDO supports design and integration with heavy capacity weigh modules.



Weigh Module Systems Handbook

Selecting the right weigh module requires know-how and experience. The METTLER TOLEDO Weigh Module Systems Handbook for engineers deals with all aspects of designing safe and accurate tanks scales. Get a free copy:

► www.mt.com/ind-system-handbook

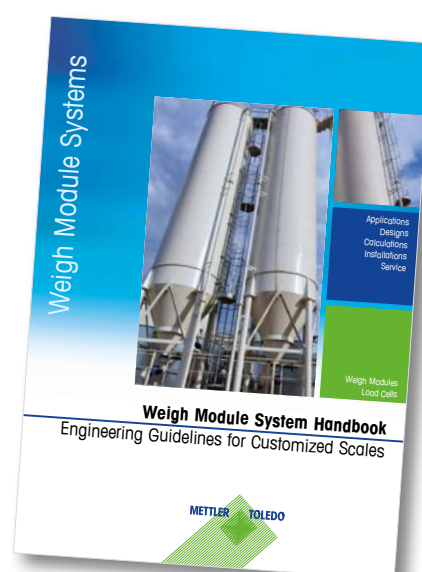


Specific-Purpose Weigh Modules

Cope with Extremes

Hygienic MultiMount, ultraflat RingMount, redundant RingMount, heavy capacity Gage-mount and SWS310 TensionMount cope with more extreme weigh module requirements. Despite their highly specialized natures, they are easy to integrate.

► www.mt.com/compression-wm

	SWB805 Hygienic MultiMount 110 kg – 4.4 t	0970 RingMount 250 kg – 10 t
		
	<ul style="list-style-type: none"> • No contamination Designed to avoid contamination as much as possible • Certified design NSF and GMP certification for peace of mind usage 	<ul style="list-style-type: none"> • Reliable 58,4 / 99,5 mm height for easy integration, IP68/IP69K load cell for best possible reliability • Chemical resistance Using 316 stainless steel and polished surfaces for best corrosion resistance
Applications	Food process tanks, clean pharma CIPs	Process tanks, pharma CIPs
Accuracy	OIML C3, NTEP 5,000	OIML C3, C6; NTEP 5,000, 10,000
Hazardous Area Approvals 	ATEX, FM, Nepsi	ATEX, FM, Nepsi
Material	304 or 316 stainless steel	316 stainless steel
360° Checking	Yes	Yes
Safe Lock	No	Yes
Accessories	Agitators, Top and bottom mounting plates, hygienic sealing kits	Hot tanks, vibration/shock
Protection	IP68 / IP69K	IP68 / IP69K
More Information	www.mt.com/ind-swb805	www.mt.com/ind-ringmount



Watch Video

Learn more about Hygienic MultiMount Weigh Module

- NSF and GMP certified
- Meets EHEDG design criteria
- Dries faster than other Weigh Modules
- Mirror polished surface for low contamination risk

► www.mt.com/ind-video-sanitary-wm

0970 Redundant RingMount 250 kg – 10 t



- **Redundant**
Two independent load cells allow online double-checking of weighing results
- **Compact**
Despite two load cells, the weigh module is very compact

High risk weighing

OIML C3, C6; NTEP 5,000, 10,000

ATEX, FM, Nepsi

316 stainless steel

Yes

Yes

Hot tanks, vibration/shock

IP68 / IP69K

www.mt.com/compression-wm

SWC515/615 PinMount/PowerMount 200 t – 300 t



- **High-capacity**
For heavy capacity silos
- **Accuracy**
Column-type load cells for best accuracy and compact dimensions

Large storage silos

OIML C1, NTEP 1.600

ATEX, FM, Nepsi, IECEx

Carbon steel

Yes

Yes

n/a

IP68 / IP69K

www.mt.com/compression-wm

SWS310 TensionMount 50 kg – 10 t



- **Suspended hoppers**
This weigh module makes weighing suspended containers as simple as possible
- **All on board**
All features to get the best accuracy and reliability from S-type load cells

Batching hoppers

OIML C3, NTEP 5,000

ATEX, FM, Nepsi

Zinc plated steel

n/a

n/a

n/a

IP67



www.mt.com/tension-wm

Weigh Module Accessories

Match the Application

We have the right accessories to match weigh modules to tanks that require mixers, high temperatures or strong vibration/shock loading. Dead stands allow use of passive legs for economic level-control solutions. Precision junction boxes connect analog load cells as accurately as possible.

► www.mt.com/weigh-modules

	Stabilizers 	Thermal Pads Vibration/Shock Pads 
	<ul style="list-style-type: none"> • Mixers, conveyors Stabilizers calm tanks and create stable weighing results • Retrofit Stabilizers can be applied anytime later if required 	<ul style="list-style-type: none"> • Hot tanks Insulate load cells from conductive heat to improve load cell accuracy and lifetime • Vibration Insulate the load cells from mechanical peaks to improve load cell lifetime
Applications	Mixers, agitators, conveyors	Extreme mechanical and temperature conditions
Material	Carbon steel, 304 stainless steel, 316 stainless steel	Acetal up to 82 °C PEI up to 170 °C Fabric plastic shock pads
Suitable for	SWB505, SWB605, SWC515, SWC615	SWB505, SWB605, SWC515, SWC615, 0970 Ring-Mount, Redundant RingMount
Retrofit	Yes	No
Dimension	No extra space required	Add. 25.4 mm height
More Information	www.mt.com/compression-wm	www.mt.com/compression-wm



White Paper

Load Cell and Weigh Module accessories:

- Function
- Application
- Accuracy

► www.mt.com/ind-downloads-loadcell

Dead Stands Spacer Plates



• Level control systems

For passive legs - typically used when liquids level-control with reduced accuracy is required

• Easy load cell replacement

Spacer plates allow load cell replacement without lifting the tank

Large storage silos

Carbon steel, 304 stainless steel

SWB505, SWB605, SWC515, SWC615

No

See datasheet

www.mt.com/compression-wm

Precision Junction Boxes



• Precise connection

Connect analog load cells the most accurate way possible

• No trim-pots

Boxes provide corner adjustment with discrete resistors which avoids unstable trim-pots

Multiple load-cell systems

304 stainless steel, 316 stainless steel

All analog weigh modules. ATEX and IECEx approved versions available.

n/a

Small, mid, large

www.mt.com/junctionbox

Load Cells

When Accuracy Matters

METTLER TOLEDO load cells are made with the most modern equipment according to global quality standards. Our internal teams work closely together to help ensure that you are always able to access the highest quality load cell technology available.

► www.mt.com/loadcell

Fully Approved

METTLER TOLEDO load cells are fully approved to global standards. Hazardous approvals come standard with load cells, so there is no need to order options, greatly simplifying logistics.



Superior Accuracy

Accuracy up to OIML C6, NTEP 10,000d allows you to build the most accurate scale for your needs and keep processes under control.



Stainless Steel

Many load cells are made from stainless steel and laser welded for highest reliability even in harsh environments.



Accessories

The right load-cell accessory is crucial for achieving the highest possible load-cell accuracy and lifetime.



ISO 9001 Development/Manufacturing

METTLER TOLEDO's load cell manufacturing facility has been ISO 9001-certified. Load-cell development follows strict standards. All load cells must pass an 11-step testing procedure that includes reviews for metrology, IP-rating and shock absorption. During manufacture, full data collection allows optimization for product reliability and accuracy.

► www.mt.com/ind-system-handbook







Single-Beam Load Cells

Convert Structures to Scales

Beam load cells are used in multiples in floor scales, belt weighers, weighing systems, pallet scales, conveyor scales, and more. Most METTLER TOLEDO beam load cells are fully approved to OIML, NTEP, FM and ATEX as a standard so they can be used in legal weighing systems globally.

► www.mt.com/singlebeam-lc

	MTB 5 kg – 300 kg	0745A 110 kg – 4,400 kg
		
	<ul style="list-style-type: none"> • High accuracy available OIML C6, NTEP III M10 version for high accuracy • Fully approved No need to order options, all approvals in the standard product 	<ul style="list-style-type: none"> • High accuracy available OIML C6, NTEP III M10 version for high accuracy • Fully approved No need to order options, all approvals in the standard product
Applications	Low capacity process weighing, pharma CIPs	Regular for high-performance process weighing in food and pharma
Accuracy	OIML C3, C6; NTEP 5,000, 10,000	OIML C3, C6; NTEP 5,000, 10,000
Hazardous Area Approvals 	ATEX, FM, IECEx, Nepsi	ATEX, FM, IECEx, Nepsi
Material	Stainless steel	Stainless steel
Protection	IP68 / IP69K	IP68 / IP69K
Accessories	Load introduction, load foot, base plates	Load introduction, load foot, base plates
More Information	www.mt.com/singlebeam-lc	www.mt.com/singlebeam-lc



Filling, Dosing and Dispensing

See publications on how to build accurate scales:

- Application notes
- White papers
- Guides
- Brochures

► www.mt.com/filling

SLB515 110 kg – 4,400 kg



- **Threaded load introduction**

Easy to integrate due to threaded load hole

- **Fully approved**

No need to order options, all approvals in the standard product

Process weighing tanks in food and pharma

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Stainless steel

IP68 / IP69K

Load introduction, load foot, base plates

www.mt.com/singlebeam-lc

SLB415 110 kg – 4,400 kg



- **Blind hole load introduction**

For allowing thermal expansion in conjunction with best accuracy

- **Economic welded design**

Nickel-plated steel and hermetically sealing combines best reliability and economics

Weighing in transport, logistics

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Nickel-plated tool steel

IP67

Load introduction, load foot, base plates

www.mt.com/singlebeam-lc

SLB215 220 kg – 4,400 kg



- **Threaded load introduction**

Easy to integrate due to threaded load hole

- **Economic welded design**

Nickel-plated steel and hermetically sealing combines best reliability and economics

Weighing in transport, logistics

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Nickel-plated tool steel

IP67

Load introduction, load foot, base plates

www.mt.com/singlebeam-lc

Load Cell Accessories

Easy Integration

Load cell accessories support easy and correct load cell integration. They provide thermal expansion and cope with uneven supports. Some also provide a damping function to reduce peak loading.

► www.mt.com/loadcell

	Expansion Kit	Expansion and Vibration Kit
		
	<ul style="list-style-type: none"> • Easy integration Kit allows for correct load introduction to maintain high accuracy • Accurate load introduction Rocker pin load introduction for best accuracy 	<ul style="list-style-type: none"> • Rigid load introduction Rubber cushion for coping with expansion and vibration • Damping Rubber layer provides damping function for reducing peak loads
Applications	Accurate weighing	Industrial tank weighing, filling, batching, conveyors
Material	Stainless steel	Stainless steel, NRB rubber
Suitable for	MTB, 0745A, SLB515, SLB215, SLB415	MTB, 0745A, SLB515, SLB215, SLB415
More Information	www.mt.com/loadcell	www.mt.com/loadcell



White Paper

Load Cell and Weigh Module accessories:

- Function
- Application
- Accuracy

► www.mt.com/ind-downloads-loadcell

Foot Kit



- **Floor scales**

Joint and rubber foot to cope with uneven floors and expansion

- **Removable rubber**

For clean areas, the rubber foot can be removed

Floor scales

Stainless steel, NRB rubber

MTB, 0745A, SLB515, SLB215, SLB415

www.mt.com/loadcell

Base Plate Kit



- **Concrete floor**

Install load cells on concrete floor

- **Complete kit**

Delivered with load cell mounting bolts and spacer

Tank weighing, conveyors

Zinc plated steel, 304 stainless steel

MTB, 0745A, SLB515, SLB215, SLB415

www.mt.com/loadcell

Precision Junction Boxes



- **Precise connection**

Connect analog load cells the most accurate way possible

- **No trim-pots**

Boxes provide corner adjustment with discrete resistors which avoids unstable trim-pots

Multiple load cell systems

ATEX, IECEx versions available

304 stainless steel, 316 stainless steel

All analog weigh modules

www.mt.com/junctionbox

Canister/Ring Load Cells

Robustness for Harsh Environments

Ring load cells and canister load cells are used in tank scales, vessel weighing, silo scales, truck weighing, vehicle scales and rail scales. We offer digital and analog load cells with OIML and NTEP approvals which are also suitable for hazardous-area use.

► www.mt.com/loadcell

	SLC820 POWERCELL PDX 20 t – 300 t	SLC611D POWERCELL 7.5 t – 22.5 t
		
	<ul style="list-style-type: none"> • Reliable High IP protection and in-built lightning protection • Predictive diagnostics Onboard monitoring of voltage, temperature and breach 	<ul style="list-style-type: none"> • Reliable High IP protection, fully stainless steel • Predictive diagnostics Onboard monitoring for voltage and temperature
Applications	Vehicle weighing, tank scales	Tank scales
Accuracy	OIML C1, C3, C4; NTEP 1,600, 10,000	OIML C3, NTEP 5,000
Hazardous Area Approvals 	ATEX, UL, IECEx, Nepsi	ATEX, FM, IECEx, Nepsi
Material	Stainless steel, laser welded	Stainless steel, laser welded
Protection	IP68 / IP69K	IP68 / IP69K
Interface	POWERCELL	POWERCELL
Junction Box	Not required	Not required
More Information	www.mt.com/loadcell	www.mt.com/loadcell



Watch the Video

PowerCell PDX – how it's made:

- CNC manufacturing
- Laser welding
- Testing

► www.mt.com/ind-powercell-how-it-is-made-video

0782 20 t – 300 t



- **Reliable**
Hermetically sealed stainless-steel design
- **Fully approved**
No need to order options, all approvals in standard product

Heavy capacity tank weighing, vehicle scales

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Stainless steel, laser welded

IP68 / IP69K

Analog

Required

www.mt.com/loadcell

SLC611 7.5 t – 22.5 t



- **Reliable**
Hermetically sealed stainless-steel design
- **Fully approved**
No need to order options, all approvals in standard product

Process-weighing tanks in food and pharma

OIML C3, NTEP 5,000

ATEX, FM, IECEx, Nepsi

Stainless steel, laser welded

IP68 / IP69K

Analog

Required

www.mt.com/loadcell

RLC 250 kg – 10 t



- **Low Profile**
Easy to integrate due to ultra-low profile
- **Accuracy**
Available in OIML C6/NTEP 10,000 when accuracy counts

Process-weighing tanks in food and pharma

OIML C3, C6; NTEP 5,000, 10,000

ATEX, FM, IECEx, Nepsi

Stainless steel, laser welded

IP68 / IP69K

Analog

Required




www.mt.com/loadcell

S-Beam Load Cells

Scales for Suspended Structures

S-beam tension load cells are designed for use with suspended tanks, dosing hoppers and other devices that are suspended from a support structure. METTLER TOLEDO offers a wide range of load cell capacities to meet the needs of a variety of weighing applications.

www.mt.com/sbeam-lc

	SLS410 50 kg – 7.5 t	SLS510 50 kg – 10 t
		
	<ul style="list-style-type: none">• Easy integration Tension load cells are relatively easy to integrate if a suspended base is available• Economic solution Basic tension load cell for industrial weighing	<ul style="list-style-type: none">• Easy integration Tension load cells are relatively easy to integrate if a suspended base is available• Fully approved No need to order options, all approvals in standard product
Applications	Suspended hoppers in dry environments	Suspended hoppers in harsh environments
Accuracy	Accuracy 0.03%	OIML C3, NTEP 5,000
Hazardous Area Approvals 	No	ATEX, FM
Material	Nickle plated tool steel, potted	Stainless steel, potted
Protection	IP65	IP67
Accessories	Knuckle eye	Knuckle eye
More Information	www.mt.com/sbeam-lc	www.mt.com/sbeam-lc



Guideline for Accurate Filling Results

Successful integration of weighing:

- Filling methods
- Filling accuracy
- Weighing components

► www.mt.com/ind-large-volume-filling-guideline

Accessories S-Beam Load Cells



- **Threaded load introduction**
Easy to integrate due to threaded load hole
- **Rod end**
Cope with expansion and angle deflection

Correct load introduction

n/a

n/a

Stainless steel, potted

n/a

n/a

www.mt.com/sbeam-lc

Precision Junction Boxes



- **Precise connection**
Connects analog load cells the most accurate way possible
- **All on board**
All elements to fine trim scales are present

Multiple load cell systems
Hazardous versions available

Accuracy 0.01%

ATEX, IECEx

304 stainless steel, 316 stainless steel

IP67, IP69K

n/a

www.mt.com/junctionbox


Single-Point Load Cells

Easy System Integration

Single-point load cells are used individually in scales, hopper scales, process control systems, conveyor weighing, packaging machines and check-weighing systems. Moment-insensitive single-point load cells allow for eccentric loads and simplify weighing system design, as the load cell copes with all occurring forces and moments without losing performance.

► www.mt.com/singlepoint-lc

	<div>MT1022, 1041, 1241, 1260 3 kg – 750 kg</div> <div></div>	<div>SLP845 15 kg – 200 kg</div> <div></div>
	<div>• Easy to integrate Due to moment insensitive design, single-points are the easiest way to build accurate scales</div> <div>• Fully approved No need to order options, hazardous approvals in the standard product</div>	<div>• Easy to integrate Tension load cells are relatively easy to integrate if a suspended base is available</div> <div>• Fully approved No need to order options, hazardous approvals in the standard product</div>
Applications	Scales, filling, batching	Food and pharma scales, filling, batching
Accuracy	OIML C3, NTEP 5,000	OIML C3, NTEP 5,000
Hazardous Area Approvals 	ATEX	ATEX, FM
Material	Aluminum, potted	Stainless steel
Protection	IP67	IP68/IP69K
Platform Size (mm)	Up to 600 x 600	Up to 500 x 400
More Information	www.mt.com/singlepoint-lc	www.mt.com/singlepoint-lc



Vessel Guideline

Successful integration of weighing into:

- Tanks
- Vessels
- Reactors

► www.mt.com/ind-vessel-guideline

SSH 50 kg – 1,000 kg



IL 150 kg – 2,000 kg



- **Easy to integrate**

Due to moment insensitive design, single-points are the easiest way to build accurate scales

- **Hermetically sealed**

Laser-welded design for best reliability even in harsh environments

Food and pharma scales, filling, batching

OIML C3, NTEP 5,000

—

Stainless steel

IP68/IP69K

Up to 800 x 1,200

www.mt.com/singlepoint-lc

- **Easy to integrate**

Due to moment insensitive design, single-points are the easiest way to build accurate scales

- **High capacity**

Scales with 2 t capacity can be built with one load cell only

Onboard weighing, filling systems

OIML C3, NTEP 5,000

—

Nickel-plated tool steel, potted


IP67

Up to 1,000 x 1,000

www.mt.com/singlepoint-lc



Our Solutions For Your Production

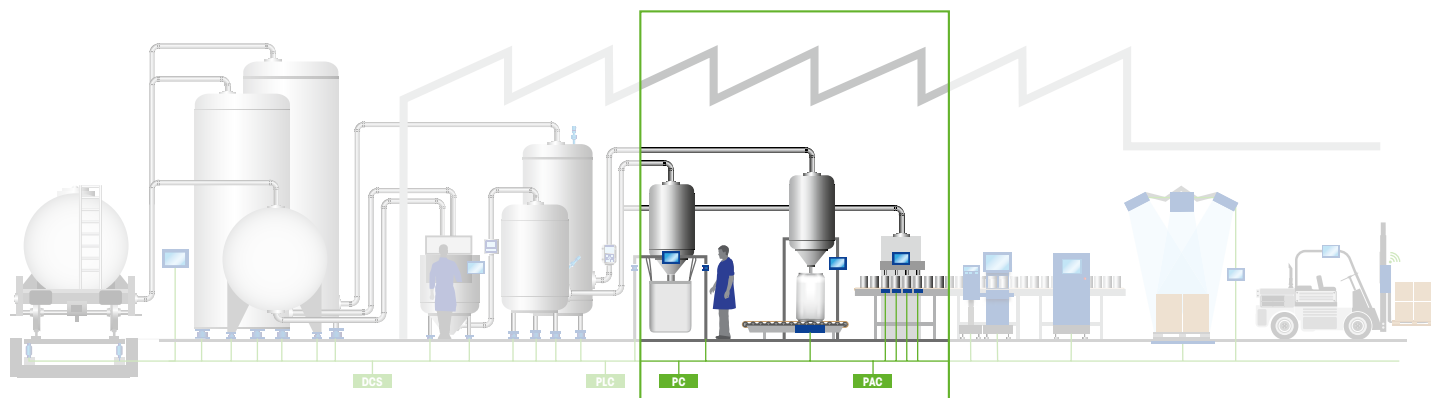

High-Precision Weigh Modules

Integrated Weighing Accuracy	224
WXS – Maximum Precision for Automation	224
SPC – The Smallest Footprint in Automation	226
WMS – Robust Precision Weighing	228
WMF – Direct Automation Interface	230
WKC – Compact Precision Weighing	232

High-Precision Weigh Platforms

Precise Weighing with High Loads	234
PBK9 – High Resolution in Harsh Environments	234
PFK9 – Maximum Precision for High Loads	236

WXS High-Precision Weigh Modules

Maximum Precision for Automation

The WXS family is designed for high-precision automated and manual weighing in instruments, machines and isolators. It features models with readabilities from 1.0 µg to 0.1 mg with weighing capacities from 22 g to 220 g. Compact design means that installation is straightforward and space-saving. The comprehensive overload protection and rugged plug-in connections are designed for use in analytical processes and production applications.

► www.mt.com/WXS

Integrated Calibration Weights

Functionality, linearity, and precision can be checked at any time with two integrated calibration weights. Customer-specific adapters on top of the weighing pan do not need to be removed for calibration if they are less than 25 percent of full load.



Adaptable Weighing Pan

The weighing pan has 3 holes to fasten customized adapters to hold vials or tubes. Adapters may weigh one-third of the capacity without restricting weighing range.



Flexible Layout and Assembly

The electronic unit can be installed separately from the weighing cell. The devices can be located up to 5 m apart. A set for optional DIN rail mounting is supplied with the modules.



Below-the-Module Weighing

An optional adapter allows weighing suspended loads below the weigh module. Overload protection is still assured in all directions.



Automated Weighing from Just 1 µg Flexibility for Complex Solutions

Rugged design, high resolution and space saving installation

Parameter		26	26DU	205	205DU	204
Maximum Capacity	nominal	22 g	22 g	220 g	220 g	220 g
Readability	nominal	0.001 mg	0.01 mg	0.01 mg	0.1 mg	0.1 mg
Maximum Capacity, Fine Range	nominal	–	11 g	–	111 g	–
Readability, Fine Range	nominal	–	0.001 mg	–	0.01 mg	–
Zero Setting Range (legal-for-trade versions)		20 g	20 g	20 g	20 g	20 g
Interfaces		RS232, Ethernet TCP / IP				
Materials		Stainless steel AISI316				
More Information		www.mt.com/WXS				



SPC High-Precision Weight Sensor

Automation with a Small Footprint

The innovative SPC weight sensor is the perfect combination of compactness and high accuracy. With its compact size, this sensor opens the door to new applications and enables flexibility in machine design.

► www.mt.com/SPC

Small in Size, High in Performance

The new SPC sensor comes with a space-saving electronic unit and integrated Ethernet connectivity. It is the perfect sensor for demanding applications where fast weighing results and installation space are critical.



Extremely Small and Compact

The ultra-compact SPC weight sensor is ideal for integration into instruments and machines. Its impressively small width of 25 mm helps to keep overall dimensions of test and filling devices smaller than ever.



Faster Weighing Speeds

The low mass of the SPC weight sensor protects against vibration. It enables very fast and accurate weighing with up to 366 filtered weight values/s sent via TCP/IP or Industrial Ethernet to the control system.



High IP Rating

With the optional washdown module, the weight sensor has an IP54 rating when weighing and an IP56 rating during wash-down. Thus, it becomes possible to weigh in a dusty environment and use a wash-down cleaning process.



The New Dimension In Automated Precision Weighing

Ultra-compact, precise and expandable

Parameter	SPC115	SPC215	SPC214
Maximum Capacity	11 g	21 g	21 g
Readability	0.01 mg	0.01 mg	0.1 mg
Dynamics			
Fast Settling Time *	0.6 s	0.7 s	0.5 s
Maximum Weight Update Rate	up to 366 values/s		
General Data			
Degree of Protection	Load cell in use: IP30 / (IP54 with wash-down module)		
	Load cell in wash-down mode: IP56 (wash-down configuration)		
	Electronic unit: IP20		
Interfaces	PROFINET, EtherNet/IP and Ethernet TCP/IP		
Materials	Stainless steel AISI316		
More Information	www.mt.com/SPC		

* Time until weighing signal is within $\pm 2 \times$ readability of end value (measured at 1/4 nominal load).



WMS High-Precision Weigh Modules



Robust Precision Weighing

The WMS family is designed for high-precision automated weighing in instruments, machines and isolators. It features models with readabilities from 0.1 mg to 10 mg with weighing capacities from 120 g to 6,200 g. The compact design means that installation is straightforward and space-saving. Rugged stainless steel housing and wash-down features make it the ideal choice for integrated weighing in analytical and production applications.

► www.mt.com/WMS

Integrated Calibration Weight

The module can be checked at any time with the internal calibration weight. Adapters on the weighing pan do not have to be removed for calibration if they weigh less than 50% of full load.

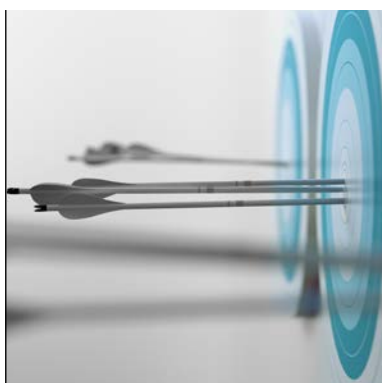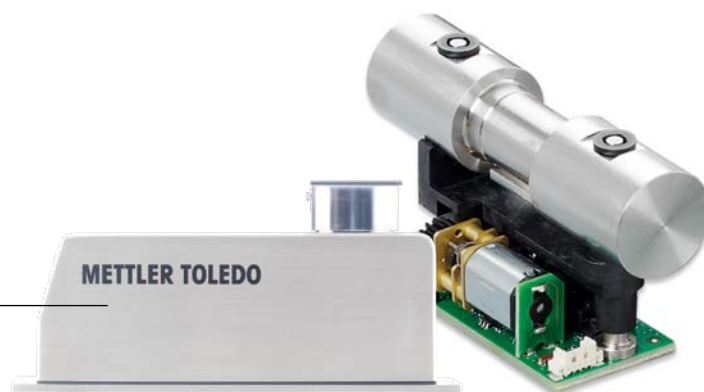

High Precision

Designed to meet the most demanding customer specifications, the WMS is a high-speed high-accuracy weigh module with readability up to 0.1 mg.




Rugged Design

The 316L (1.4404) stainless steel housing with FDA-compliant seals and a rugged industrial plug connector with IP67 protection ensure high levels of reliability.



Flexible Platforms

Customer-specific adapters can easily be fixed to the square shaped weighing platform which is rigidly connected to the weigh module by means of a patented locking device.

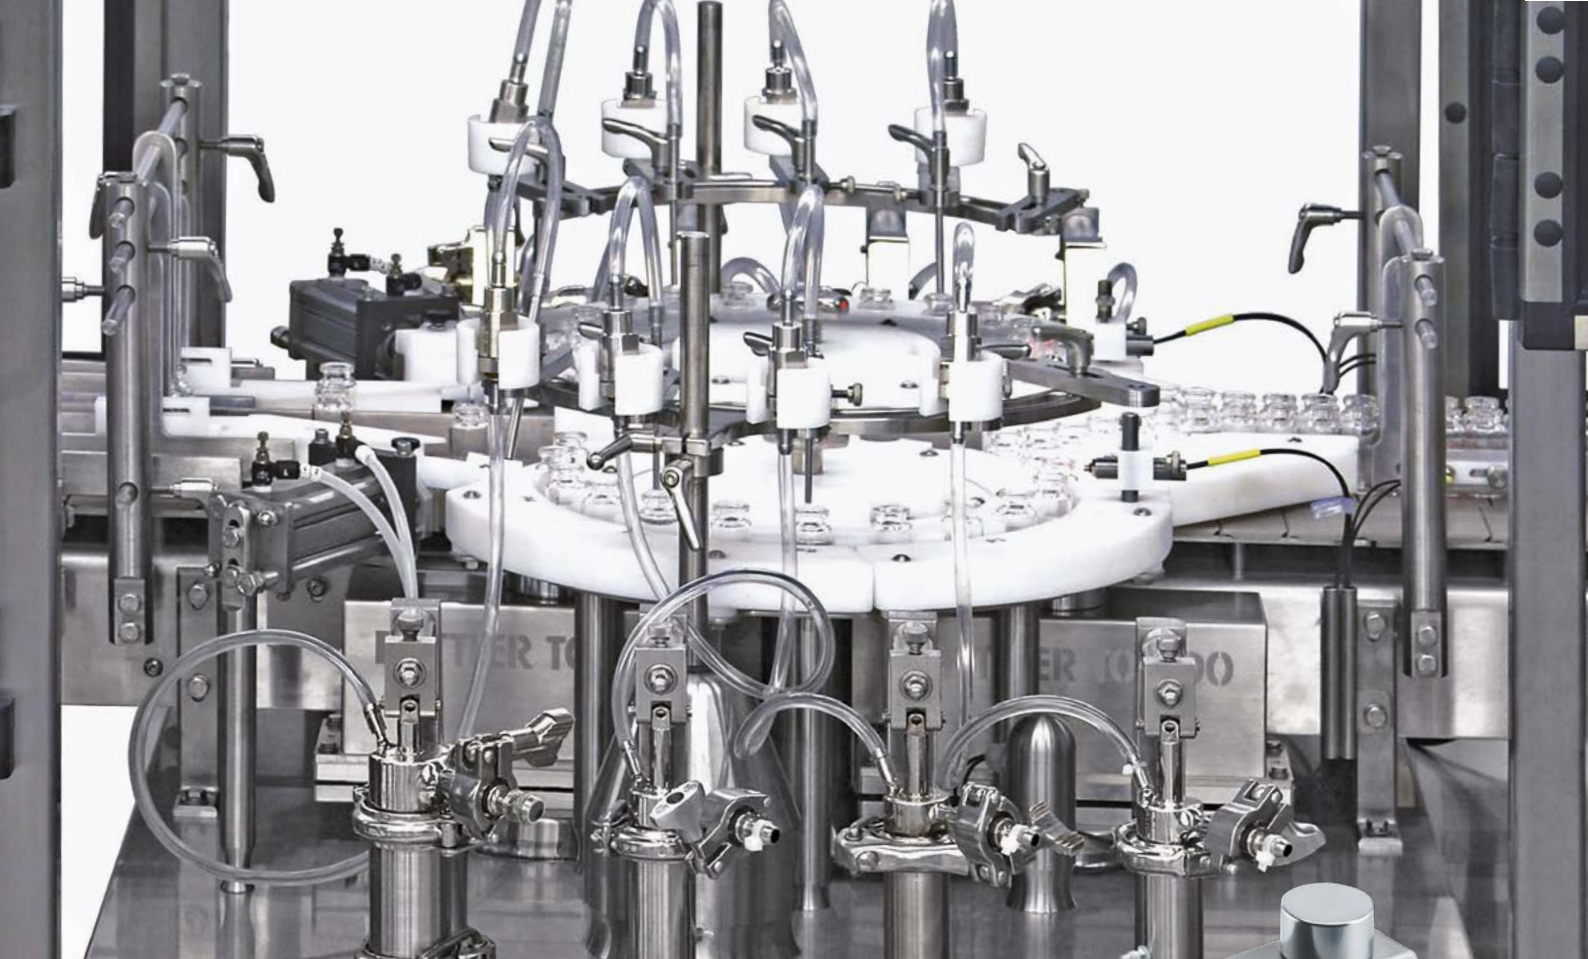

Designed for Automation

Compact Precision Weighing

High precision, rugged design, and robust

Models with internal adjustment

Parameter		WMS104C	WMS404C	WMS1203C	WMS6002C
Maximum Capacity	nominal	120 g	410 g	1,220 g	6,200 g
Readability	nominal	0.1 mg	0.1 mg	1 mg	10 mg

Models without internal adjustment

Parameter		WMS204	WMS803	WMS4002
Maximum Capacity	nominal	220 g	820 g	4,200 g
Readability	nominal	0.1 mg	1 mg	10 mg

IP Protection (in operational state with weighing plate/platform in place)

When Weighing (protected with double-labyrinth)	IP54
When Cleaning Wash-Down (seal activated with 1 bar air pressure)	IP66
Interfaces	RS232, RS422
Materials	Stainless steel AISI316
More Information	www.mt.com/WMS



WMF High-Precision Weigh Modules

Direct Automation Interface

The very high resolution of the weigh module – up to 2 million digits – enables the weighing of different container sizes on the same weigh module. The modules' very compact design includes power supply and industrial Ethernet connectivity without additional control cabinet space.

► www.mt.com/WMF

Plug and Communicate with Most Common PLC Systems

WMF is dedicated for use in automation. Connectivity via Ethernet/IP or PROFINET is incorporated in the space saving, compact unit. Certified automation interfaces with EDS, AOP and GSDML drivers plus sample code for cyclic and acyclic messaging at 92 and 366Hz.

**PROFI[®]
NET**

EtherNet/IP[™]



Comprehensive Overload Protection Assures Uptime

WMF weigh modules are designed to have a long service life because of their innovative overload protection against forces from all directions. This protects accuracy of the weigh module during normal operation but also in the event of malfunction.



Test Functionality and Accuracy at Any Time

The production process does not need to be interrupted for calibration with an external reference weight, since the module's internal weight can be used to check functionality.



Protection Allows Liquid Rinsing for Clean-in-Place

Stainless steel housing (316L), FDA compliant sealing and the optional IP65 wash-down feature allow in-place cleaning procedures with water or liquid chemicals.



Designed for Automation

Tailored for Multi-Line Weighing

Compact size, integrated electronics, protected against overloads

Parameter		WMF204C	WMF303C
Maximum Capacity	nominal	220 g	320 g
Readability	nominal	0.1 mg	1 mg
Dynamics			
Maximum Weight Update Rate		92 values/s and 366 values / s *	92 values/s and 366 values / s *
Settling Time (under good conditions)	typical	< 0.4 s	< 0.4 s
IP Protection			
When Weighing		IP44	
When Cleaning, Wash-Down (seal activated with 0.6 bar air pressure)		IP65	
Interfaces		PROFINET IO RT, EtherNet / IP, Ethernet TCP / IP	
Materials		Stainless steel AISI316	
More Information		www.mt.com/WMF	

* Fast weight update channel



WKC High-Precision Weigh Modules


Compact Precision Weighing

WKC weigh modules offer a compact and cost-effective solution for on-board weighing in automated applications where high resolution is needed. Standard M12 connectors and fully integrated electronics minimize integration efforts and enable quick and easy installation.

► www.mt.com/WKC

Compact Design

Fully integrated electronics help to save space in the machine/instrument design. No additional unit is needed for communication. Weigh modules can be integrated in machines/instruments with tight space requirements.



Easy Configuration

A computer-based software for parameterization, diagnostics, and data backup makes getting started easy. This allows the WKC weigh module to be customized for virtually any application.




Robust

Stainless steel housing and coated connection cable protect the weigh module against external physical and electromagnetic influences. This ensures reliability of weight values and extends product life.



Quick Functionality Test

Thanks to the internal weight, it is possible to check correct functioning of the weigh module at any time, even with preloads. This saves calibration time and reduces down-time.

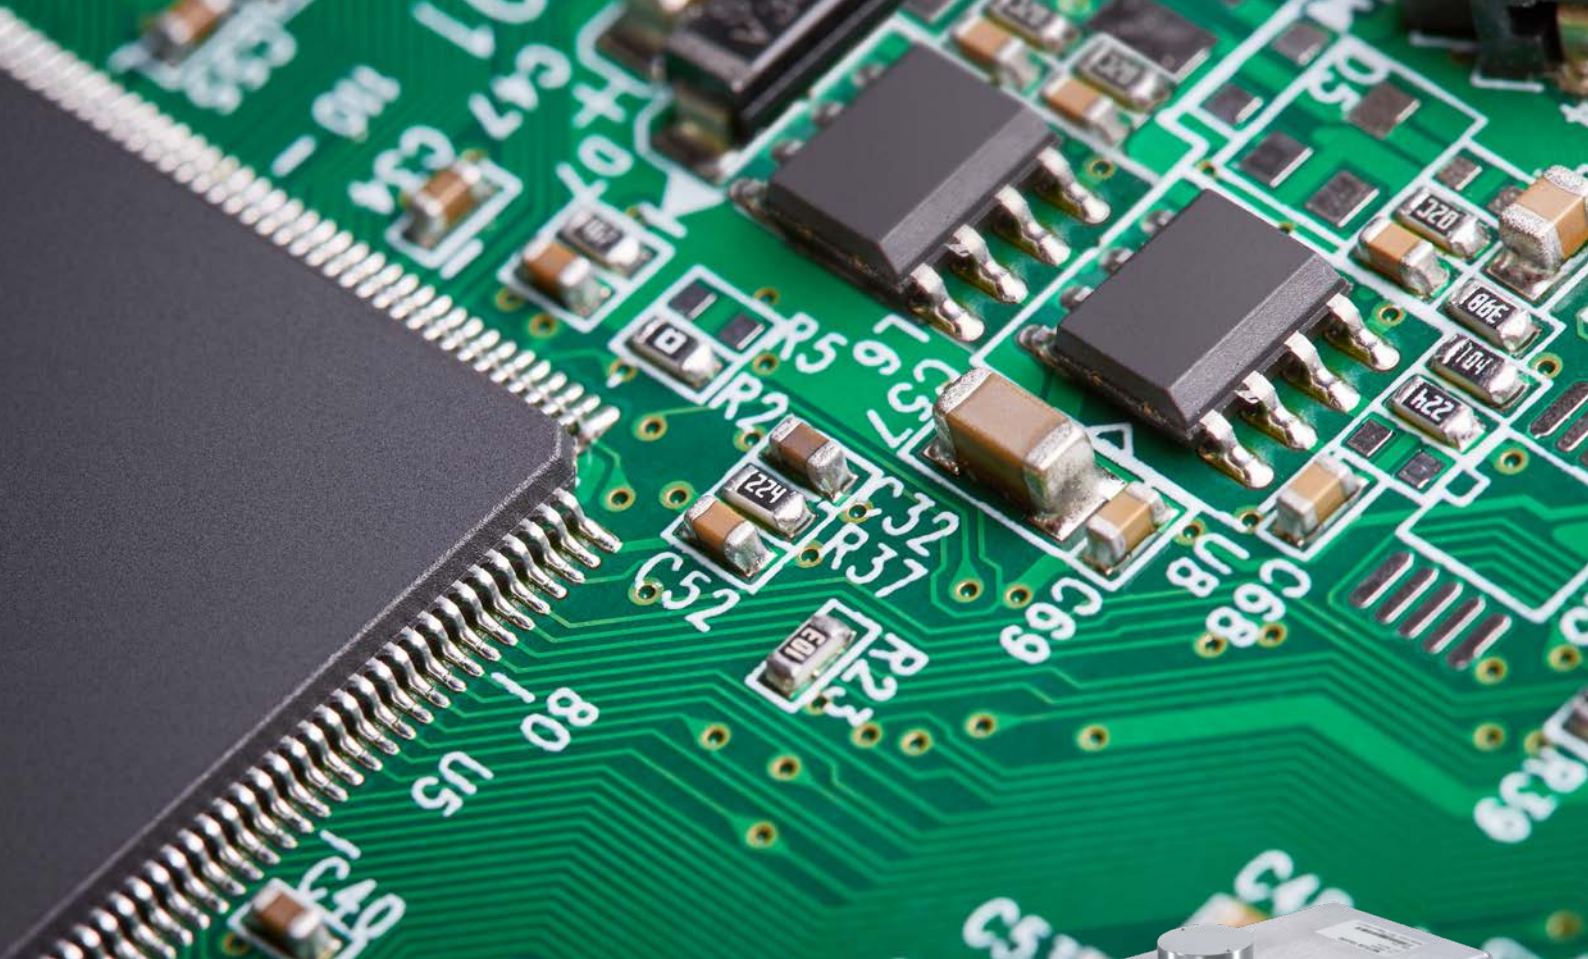

Designed for Automation

Compact Precision Weighing

High precision, rugged design, and robust

Parameter		WKC204C	WKC603C	WKC6002C
Maximum Capacity	nominal	220 g	620 g	6,200 g
Readability	nominal	0.1 mg	1 mg	10 mg
Interfaces				
Interfaces		RS422, RS232		
Maximum Weight Update Rate		92 values / s		
Connector		M12, 12 p, male, A-coded		
Materials				
Housing, Base Plate		Stainless steel (EN 1.4307 / 304L)		
Weighing Pan		Stainless steel (EN 1.4307 / 304L)		
More Information		www.mt.com/WKC		



PBK9 Weighing Platforms

High Resolution in Harsh Environments

Accurate weighing helps you manage raw materials, ensure compliance with regulations and improve your product quality. For bench and floor scale applications that require reliability with the best accuracy available, PBK9 Weighing Platforms provide outstanding performance. A range of platforms with capacities from 0.6 to 300 kilograms and resolutions of up to 750,000 divisions are useful for many applications.

► www.mt.com/PBK9

Outstanding Accuracy

Thanks to its innovative measuring technology, PBK9 Weighing Platforms ensure industry-leading metrological performance. With a resolution of up to 750,000 divisions, the weighing platform is ideally suited for all weighing processes in which quality is critical and tolerances need to be minimized.



Smart Load-Cell Technology

The Monobloc technology load cell is at the core of PBK9 Weighing Platforms. Advanced technology guarantees the highest precision and reliability.



Reliable Process

PBK9 sensors always deliver reliable and exact results – even in the most difficult environments. This ensures you are always on the safe side when running formula, dosing and quality check applications.



Direct Connectivity

PBK9-APW weighing platforms can be directly connected to any automation system via RS422 or RS485 and serviced with an additional RS232 interface.



Accurate Weighing

From Ultra-Light to Heavy-Weight

High-precision weighing, reliable in harsh conditions, fast weighing processes

Platform Type	A3	A6	AB15	AB30	AB60	B60	B120	CC150	CC300
Capacity	3 kg	6 kg	15 kg	30 kg	60 kg	60 kg	120 kg	150 kg	300 kg
Readability	0.005 g	0.01 g	0.02 g	0.05 g	0.1 g	0.1 g	0.2 g	0.2 g	0.5 g
Platform Dimensions	275 x 345 mm		280 x 350 mm			402 x 503 mm		600 x 800 mm	
Interfaces	RS232, RS422 / RS485								
Maximum Weight Update Rate	92 values / s								
IP Rating	IP66 / IP68								
Load Plate Material	Stainless steel AISI304 as standard, stainless steel AISI316 available as option								
Hazardous Area Approvals 	IECEx/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)								
More Information	www.mt.com/PBK9								



PFK9 Weighing Platforms

Maximum Precision for High Loads

Accurate weighing helps you manage raw materials, ensure compliance with regulations and improve your product quality. For bench and floor scale applications that require reliability with the best accuracy available, PFK9 Weighing Platforms provide outstanding performance. A range of platforms with capacities from 300 to 3,000 kilograms and resolutions of up to 750,000 divisions are useful for many applications.

► www.mt.com/PFK9

Outstanding Accuracy

Thanks to its innovative measuring technology, PFK9 Weighing Platforms ensure industry-leading metrological performance. With a resolution of up to 750,000 divisions, the weighing platform is ideally suited for all weighing processes in which quality is critical and tolerances need to be minimized.



Smart Load-Cell Technology

Monobloc technology load cells are at the core of PFK9 Weighing Platforms. Advanced technology guarantees the highest precision and reliability.



Safe Processes

The PFK9 Weighing Platforms (1.5 to 3 tons) are available with a lift option. Hinged load plates are supported by pneumatic springs. These features guarantee safe opening and closing and provide fast service access.



Direct Connectivity

PFK9-APW weighing platforms can be directly connected to any automation system via RS422 or RS485 and serviced with an additional RS232 interface.



Accurate Weighing

From Ultra-Light to Heavy-Weight

High-precision weighing, reliable in harsh conditions, fast weighing processes


Platform Type	C300	C600	D600	D1500	E1500	E3000	ES1500	ES3000
Capacity	300 kg	600 kg	600 kg	1,500 kg	1,500 kg	3,000 kg	1,500 kg	3,000 kg
Readability	0.5 g	1 g	1 g	2 g	2 g	5 g	2 g	5 g
Platform Dimensions	800 x 1,000 mm		1,000 x 1,250 mm		1,250 x 1,500 mm		1,500 x 1,500 mm	
Interfaces	RS232, RS422 / RS485							
Maximum Weight Update Rate	92 values / s							
IP Rating	IP66 / IP68							
Load Plate Material	Stainless steel AISI304 as standard, stainless steel AISI316 available as option							
Hazardous Area Approvals 	IECEx/ATEX/NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 or Div. 2)							
More Information	www.mt.com/PFK9							





Vehicle Scales

To Fit Any Operation

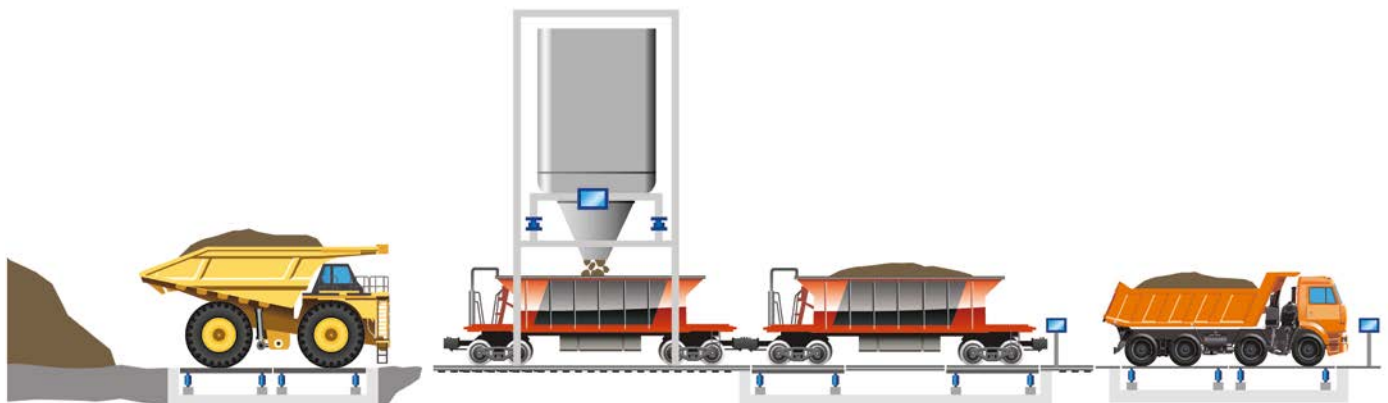

Vehicle Scale Variety

Designed for Your Business

240

Truck and Rail Scale Models

Durability You Can Trust

242

POWERCELL® Load Cells

Protect Your Profits

244

In-Motion Weighing

Process Vehicles Quickly and Safely

248

Scale-Management Solution

Designed to Fit Your Business

250

Unattended Weighing

Process Vehicles in a Fraction of the Time

252


Vehicle Scale Variety

Designed for Your Business

METTLER TOLEDO protects your business by supplying you with accurate and reliable truck and rail scale solutions designed to thrive in any work environment. Whether your concern is a high volume of traffic, hazardous area, extreme weather, or all of the above, we offer the right fit based on your needs.

► www.mt.com/vehicle

Our comprehensive design, analysis and testing program enables us to deliver scales proven to meet the demands of your weighing application. No other company tests weighbridges this thoroughly.

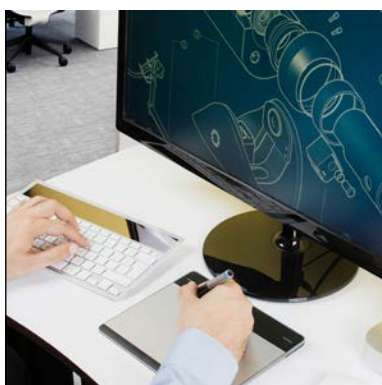


Design

Throughout more than 20 years of CAD modeling, we have refined our designs to offer the best weighbridges available. Our engineers continue to innovate and build on the success of previous designs.



Testing

METTLER TOLEDO is the only manufacturer that performs true lifecycle testing on all weighbridge models. Our unique Module Masher applies 20 years of traffic in 6 to 8 weeks.

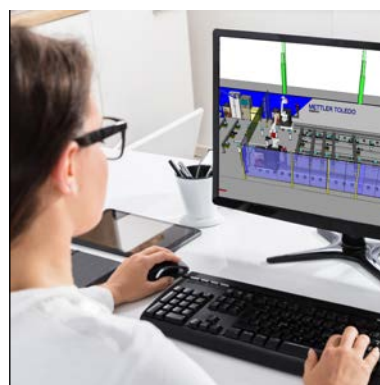

Analysis

Finite-element analysis shows how a weighbridge design should perform under various loading conditions. Analyzing all areas of the weighbridge allows for improvements in design.



Keep Your Business Moving

A vehicle scale will have a long-term impact on your operation. In many cases, it is vital to your ongoing productivity and profitability. With a full range of weighbridges/truck scales and railroad scales, METTLER TOLEDO can work with you to find the right weighing solution to keep your business moving.

With industry-leading load-cell technology, software, and services – METTLER TOLEDO is your one stop shop for all things vehicle scale.



Learn More: Quality Built into Every Step

Get an inside look into our heavy capacity production facility and see how we build quality into every step.

► www.mt.com/INDPlantVisit

Truck and Rail Scale Models

Durability You Can Trust

METTLER TOLEDO vehicle scales are manufactured to the highest quality by a team of skilled engineers and welders, and then subjected to true lifecycle testing. The resulting scales are ruggedly dependable weighing machines that are made to perform.

► www.mt.com/vehicle

Steel Deck Truck Scales

Sleek yet durable, steel deck truck scales offer unsurpassed versatility



- **Quick-install**
With no wait time for concrete curing, turn around time to a working scale can be as short as one day
- **Water tight bridge**
Continuous welds and superior paint specifications deter corrosion
- **Sturdy design**
Orthotropic ribs distribute weight from heavy loads to the strongest part of the scale

Concrete Deck Truck Scales

Rugged and dependable, concrete deck truck scales can endure the extreme



- **Slip resistant surface**
Concrete deck scales provide superior grip in slippery conditions
- **Robust design**
A concrete and steel composite structure designed to last
- **Customization available**
Metalization of the weighbridge offers additional protection from the elements

Weighbridge Types Available	Multi-module	Multi-module
Construction	Orthotropic steel ribs	Hybrid – steel deck pan, concrete deck
Scale Lengths Available	3 to 42.7 m (10 to 140 ft)	3 to 42.7 m (10 to 140 ft)
Axle Load Range	22 t (low) to 114 t (high)	22 t (low) to 40 t (high)
Foundation Compatibility	Above ground, shallow or deep pit	Above ground, shallow or deep pit
Shipping Requirements	Standard or container, per model	Standard or container, per model
Customizable	Yes	Yes
More Information	www.mt.com/vehicle	www.mt.com/vehicle



Learn More: Unmatched Validation Testing

Learn more about life-cycle testing with the module masher.

► www.mt.com/weighbridgetesting

Railroad Scales

Strength and durability Built to stand up to the massive loads of rail traffic



• Strength

Proven structural designs to stand up to the most demanding applications

• Longevity

Superior materials and manufacturing ensure long life, even with years of heavy loads and challenging environments

• Versatility

Truck and rail scale combinations meet multiple needs in one scale to save space and money

Multi-module

Steel or concrete deck, welded steel beams

3.8 to 22.8 m (12 to 75 ft)

85 t per axle set

Shallow pit

Standard

Yes

www.mt.com/rail-scales



Remote Displays

For Weight Results from a Distance

Remote displays allow truck drivers and other personnel to see weights at locations other than where the scale indicator is mounted. The bright LED display is easy to read day and night. Three sizes are available with viewing distances of up to 80 m. Options include a built-in red/green traffic light and wireless communication between the display and the scale indicator. A durable aluminum enclosure makes the remote displays suitable for indoor and outdoor use.

POWERCELL® Load Cells

Protect Your Profits

POWERCELL® load cells have revolutionized vehicle weighing. With their unique design and patented digital signal processing – they bring a new level of performance to your vehicle weighing applications. Available in two models, POWERCELL® GDD® and POWERCELL® PDX® – you are sure to find the right fit for your operation.


► www.mt.com/NoJunctionBoxes

All POWERCELL® load cells are constructed with 100% stainless steel components and are hermetically sealed and vacuum tested to ensure a long life.



True Accuracy

Digital signal processing enables our patented POWERCELL® technology to weigh as close as possible to the "true weight" of the load, so you can be confident in your results every time.

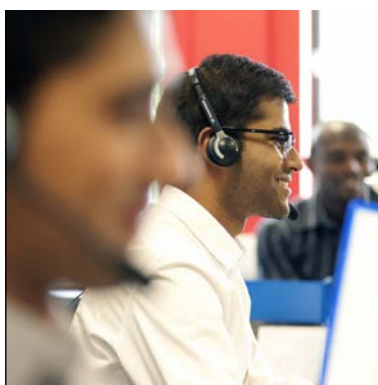

Advanced Diagnostics

A built-in diagnostics system gives you real-time data about the condition of each load cell, including weighing errors, environmental conditions, overloading, network health and voltages.




Environmental Protection

Truck scales operate in some of the harshest conditions possible. POWERCELL® offers advanced protection against water ingress and lightning strikes – common causes of scale downtime.



Simplified Network of POWERCELL® PDX®

POWERCELL® PDX® load cells connect to one another in a simple network that transmits individual load cell signals to the scale indicator, eliminating the need for a junction box. This enables outstanding reliability and simplified service.

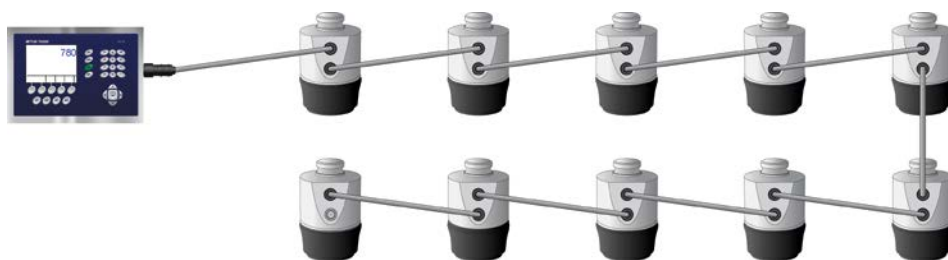

POWERCELL® Load Cells

Reliability You Can Count On

POWERCELL® load cells protect your business by ensuring that your vehicle scale weighs accurately day in and day out. This revolutionary technology cuts your operating costs by minimizing errors, reducing downtime, and simplifying service.

► www.mt.com/powercell



POWERCELL® PDX®

The highest level of accuracy and reliability



- **Simplified network**
Ease of servicing with quick-connect cables and no junction boxes
- **Environmental protection**
Watertight load cells and cables form a network that is 100% submersible
- **Proven accuracy**
Accurate transactions on the truck scale mean less product giveaway


POWERCELL® PDX®

Upgrade and Conversion Kit

All of the benefits of a PDX load cell system at a fraction of the cost of a new scale



- **Improved accuracy**
Improved accuracy will be noticeable immediately for quick ROI
- **Easy installation**
Technicians can usually complete a vehicle scale upgrade in one day
- **Decreased maintenance**
Improved reliability means fewer maintenance and repair bills

Capacity	20 t, 30 t, 50 t, 90 t	20 t, 30 t, 50 t, 90 t
Accuracy	High	High
Communication	CAN	CAN
Network	No junction box	No junction box
Diagnostics	Yes	Yes
Lightning Protection	> 80,000 A	> 80,000 A
Breach Detection	Yes	Yes
Hazardous Area Approvals 	IECEx/ATEX/ NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 and Div. 2)	IECEx/ATEX/ NEC (Zone 1/21 or Zone 2/22), NEC (Div. 1 and Div. 2)
More Information	www.mt.com/powercell	www.mt.com/powercell



Learn More: Upgrading Your Vehicle Scale

Get information about Vehicle Scale upgrades.

► www.mt.com/UpgradeToPDX

POWERCELL® GDD®

Digital accuracy and reliability at an economical price



POWERCELL® GDD® Upgrade and Conversion Kit

Get the advantages of the GDD load cell system: Improved performance and productivity



0782 Analog Load Cells

Trusted technology from the most trusted brand



- **Digital accuracy**

Easily calibrated to a high level of accuracy, built-in compensation

- **Diagnostic capabilities**

Allows you to view individual load-cell outputs on the scale indicator

- **Cost-effective investment**

Provides proven accuracy and reliability at an economical price

- **POWERCELL® hub**

Our sealed POWERCELL® hub acts as a router for the CANBUS digital signal – no metrology adjustments are made inside the hub

- **Simple connectivity**

Cables are securely attached to GDD load cells at the factory for easy installation

- **Superior diagnostics**

Display individual load cell outputs to simplify troubleshooting

- **Versatile**

Can be used in many applications that require reliable weighing at an economical price

- **Time tested**

A trusted load cell for many years

20 t, 30 t, 50 t

High

CAN

POWERCELL® hub

Yes

> 29,000 A

No

n/a

www.mt.com/powercell

20 t, 30 t, 50 t

High

CAN

POWERCELL® hub

Yes

> 29,000 A

No

n/a

www.mt.com/powercell

20 t, 30 t, 50 t, 100 t

Mid

Analog signal

Junction boxes

No

Not rated

No

IECEx/ATEX (Zone 1/21 or Zone 2/22),
NEC (Div. 1 or Div. 2)

www.mt.com/powercell

In-Motion Weighing

Process Vehicles Quickly and Safely

We offer weigh-in-motion (WIM) solutions for trucks and railroad cars. These innovative solutions are designed to collect the vehicle weights and other data that your operation requires. They increase throughput by eliminating the need for vehicles to stop for weighing.

AxlePass WIM Scale



An AxlePass scale can weigh as many vehicles as five static scales in a fraction of the time and at a fraction of the cost. It provides an efficient way for operations that handle large volumes of traffic to verify container weights or ensure that vehicles comply with highway weight limits.

Highway WIM Solutions



Highway WIM systems measure the per-axle and gross weight of vehicles traveling at highway speed. This solutions makes the inspection and enforcement of highway regulations much more efficient.

Applications	<ul style="list-style-type: none">• Low-speed weigh-in-motion	<ul style="list-style-type: none">• Checkweighing• Sorting
Vehicle Speed	Up to 25 km/h (15 mph)	16-64 km/h (10 – 40 mph)
Accuracy	Within $\pm 2\%$ at <10 mph	Within $\pm 6\%$ on gross weighing
Processing	Automated vehicle processing	Automated vehicle processing
Versatility	Dynamic or static weighing	Dynamic weighing
Data Collected	<ul style="list-style-type: none">• Gross weight• Axle weight• Axle-group weight• Speed• Time and date	<ul style="list-style-type: none">• Gross vehicle weight• Wheel load• Axle load• Axle-group load• Equivalent single-axle load• Speed• Axle spacing• Wheelbase• Lane• Direction• Time and date
More Information	www.mt.com/WIM	www.mt.com/WIM



Process 3x Faster, with TruckPass™

TruckPass legal-for-trade WIM is now available to US customers. See how your operation could benefit when drivers do not have to stop on the truck scale!

► www.mt.com/TruckPass

Railroad CIM System



A coupled in-motion (CIM) system weighs entire trains in a fraction of the time required for static weighing. This dynamic weighing solution provides legal-for-trade weights for individual railroad cars quickly and safely. It protects workers by eliminating the need to uncouple and recouple cars.

- Dual-draft weighing
- Pseudo single-draft weighing
- Combination CIM/static weighing

Up to 10 km/h (6 mph)

Legal for trade

Automated vehicle processing

Dynamic or static weighing

- Railroad car weight
- Train weight
- Speed
- Direction
- Railroad car ID
- Material ID
- Time and date

www.mt.com/ind-rail-CIM



Scale-Management Solution Designed to Fit Your Business

Our three software packages make it easy to meet the specific needs of any operation. They enable you to process weighing transactions, capture data, and use the data with other business systems. Upgrade the software to expand its capabilities as your business grows.

► www.mt.com/DataBridge



DataBridge™ SS Software

DataBridge™ SS scale-house software is a PC-based solution for automating your vehicle-weighing operation. It provides complete control of one or two scales from a personal computer. The local database stores a detailed record of each weighing transaction for use with other software systems.



DataBridge™ MS Software

DataBridge™ MS software brings the benefits of scale-house software to larger operations with more complex weighing transactions. Install it on a network, so that multiple workstations can share data. This powerful solution speeds up weighing on multiple scales, manages transaction data, and protects against fraud.



DataBridge™ ES Software

DataBridge™ ES software provides a window into your vehicle-weighing operations. This enterprise solution consolidates data from multiple sites for centralized data management. It fits seamlessly into even the largest business, enabling the company-wide data sharing needed to maximize efficiency and productivity.



Benefits of DataBridge™

- Better organization, simpler processing, fewer errors and faster transaction time.
- Eliminates paperwork by storing a digital record of every weighing transaction in a secure database.
- Easily retrieve records quickly and easily for review, billing, and export.
- Automatically generate and email report to your clients.
- Integrate unattended weighing operations and traffic management.
- Scalable solution that grows with the organization.
- Various pricing options to meet business requirements.
- Advanced anti-cheating features to protect profits.



Watch Our Free On-Demand Webinar:

Thinking beyond the scale

► www.mt.com/veh-beyondthescale

Unattended Weighing

Process Vehicles in a Fraction of the Time

Introduce self-service efficiency to your vehicle-weighing operation. Unattended weighing offers an effective strategy for increasing transaction speed and overall productivity while decreasing operating costs. It enables drivers to process their own weighing transactions without the need for a scale operator.

► www.mt.com/VEH-Indicators



Weigh More Trucks Per Day

An unattended weighing solution speeds up vehicle weighing by allowing drivers to process their own transactions. It enables facilities to improve transaction speed by over 50%. Unattended weighing is especially valuable to facilities that have multiple vehicle scales or operate 24/7.



Reduce Operating Costs

Unattended weighing eliminates the need for a scale house with full-time scale operators on duty. By choosing an unattended driver scale indicator over a scale house, you can reduce construction costs, reduce the weighing operation's footprint, and free workers to handle other tasks.



Improve Safety

Costly accidents, trips and falls are the leading causes of non-fatal injuries to tractor-trailer drivers. Unattended weighing prevents accidents by keeping drivers safely inside their vehicles throughout the weighing process. Everything needed to complete a weighing transaction is right at the driver's fingertips.



IND9US Unattended Scale Indicator

- Standalone system with built-in IND780 scale indicator
- No personal computer required
- Optional accessories: keyboard, card reader, ticket printer, intercom



IND9UT Unattended Scale Indicator

- Touch screen simplifies transactions
- DataBridge™ software manages weighing data
- Controls ticket printing, traffic lights, and gates



DataBridge™ Express

- Drivers process weighing transactions on mobile devices
- Tickets sent by email
- Cost reduction of up to 75% compared to traditional driver scale indicators



Learn More: Streamline Vehicle Transactions

See how you can improve productivity and throughput at the scale

► www.mt.com/VEH-Contactless



Our Solutions For Your Production



Parcel and Pallet Dimensioning, Weighing and Scanning (DWS)

10

Dynamic Parcel Systems

Solutions and Components 256

Dynamic Parcel Weighing

High Speeds, High Throughputs 258

Dynamic Parcel Dimensioning

See More Revenue 260

TLD250 Static Dimensioner

User-Friendly, Adaptable Design 262

CSN810 TableTop™ – Static Parcel Dimensioning

Improve Manual Operations 264

TLD870 – Static Pallet Dimensioning

Simple, Fast, Accurate 266

TLD970 – Dynamic Pallet Dimensioning

Non-Stop, In-Motion Measuring 268



► **Full Range of Floor and Forklift Scales** – For More Information, See Page

160

Dynamic Parcel Systems Solutions and Components

Whether your operation calls for simple weighing or complex data-capture with high-throughput weighing and integrated dimensioning/barcode reading there are solutions for every requirement.

► www.mt.com/dynamic-parcel

	TLX Basic Basic turn-key dimensioning, weighing and scanning 	TLX Advanced Advanced turn-key dimensioning, weighing and scanning 
	• Cost-effective DWS Industry-leading technology in a simple DWS configuration	• Highest read rates Any shape, any surface Multi-sided barcode reading • Advanced operation modes Fully configurable customized interfaces • Powerful data management Communicate with any sorter • Sorting and tracking
Flexible Weighing Point	No	Yes
Dimension and Barcode Merging	Yes	Yes
Advanced Filter Technology	Yes	Yes
Multi-Lingual Scale Indicator	No	Yes
Advanced Operation Modes	No	Yes
Delivered with Dimensioning and Barcode Reading	Yes	Yes
Speed	72 m/m	Up to 120m/min
Throughput	Up to 1,500 pcs/h	Up to 6,000 pcs/h
Accuracy	50 g	20, 50 g
More Information	www.mt.com/TLX-Basic	www.mt.com/TLX-Advanced

* Depends on single or dual scale configuration and weight of load



Transport and Logistics Buyer's Guide For System Integrators

Download your free copy to discover our full range of weighing and dimensioning components for accurate high-throughput parcel measurement.

► www.mt.com/TL-BuyersGuide

TLW250

Cost-effective dynamic weighing with reliable performance



TLW450

High-speed, high accuracy dynamic weighing



XS100 DualScale

High performance, high throughput weighing with exceptional robustness



• Essential performance

Reliable, cost-effective dynamic weighing

• High speed

Speeds up to 180 m/min
Fast data communication

• High accuracy

Accuracy in all conditions

• High speed

Speeds up to 240 m/min
Fast data communication

• High throughput

Two weighing belts that can be combined into a third virtual weighing belt
Flexible weighing point

• Robust design

Sturdy frame and feet
Stiff, lightweight conveyor body

No

Yes

Yes

No

Yes

Yes

No

Yes

Yes

Yes

Yes

Yes

No

No

Yes

No

Optional

Optional

90 m/min

Up to 180 m/min

240 m/min MID, 180 m/min NTEP

Up to 7,200 pcs/h

Up to 11,000 pcs/h

Up to 18,000 pcs/h

5, 10, 20, 50 g

5, 10, 20, 50 g

50 g

www.mt.com/TLW250

www.mt.com/TLW450

www.mt.com/XS-DualScale

Dynamic Parcel Weighing

High Speeds, High Throughputs

METTLER TOLEDO dynamic parcel scales are designed for seamless integration into any sorting system. Choose from a variety of sizes, configurations and accessories to meet your individual operational requirements.

► www.mt.com/dynamic-parcel

A flexible weighing point can increase scale throughput by up to 30%. The weighing time is determined based on parcel length to optimize parcel gapping.




Easy Integration

Dynamic scales, TLW450 and XS100 DualScale offer seamless integration with dimensioners, barcode readers and conveyors. Choose from a selection of standard interfaces or request a customized protocol.



Global Standards

Tailor your system based on a wide range of standard designs and benefit from short lead times, standardized installation procedures and easily available spare parts.

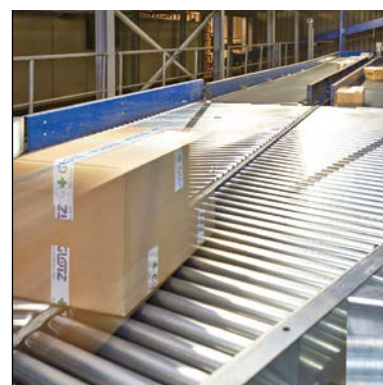

High Throughput

Short measuring times, smart gapping and special system design work together to achieve highest throughputs, keeping sorter efficiency at its peak.



Accuracy in Tough Conditions

METTLER TOLEDO dynamic scales use state-of-the-art load-cell technology to achieve top weighing accuracy at any speed, in all conditions.

Advanced technology filters out environmental disturbances such as vibrations from motorized systems which can negatively impact results.

Combined with a rugged, robust design, this feature works to ensure high precision and reliability in tough conditions including mezzanine installation or installation within a high-speed sorting system.

Dynamic Parcel Dimensioning

See More Revenue

With the ability to accurately obtain dimensions of difficult-to-measure packages of any shape at high speeds, METTLER TOLEDO dimensioners provide read rates and revenue recovery that others cannot match.


► www.mt.com/TLD950

With larger optics that let in more light and a wider dynamic range, METTLER TOLEDO dimensioners provide the best read rates in their class.



Recover More Revenue

Easily and accurately measure all parcels of all shapes, colours and wrappings, for maximum revenue recovery.

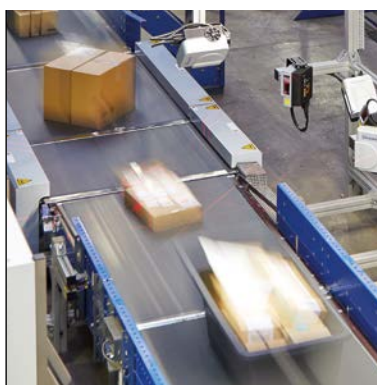

Reduce Miss-Sorts

Reduce the number of rejects for improved sorting efficiency and reduced manual handling costs.



Recover Revenue on Flats

An approved measurement accuracy of 2 mm in height allows for legal-for-trade invoicing of flat parcels down to 20 mm for additional revenue.



Any Speed, Any Shape

TLD950 Dimensioners

Dimensioning Solution	TLD950 SingleHead	TLD950 MultiHead
Singulated Cuboidal Shapes	Yes	Yes
Singulated Irregular Shapes	No	Yes
Touching Regular Shapes	Yes*	Yes*
Max. Size (LxWxH)	4,000 x 900 x 900 mm	4,000 x 1,600 x 1,200 mm
Min. Size (LxWxH)	50 x 50 x 20 mm	50 x 50 x 20 mm
Belt Speed	3.3 m/s	3.3 m/s
Conveyor Type	Flat conveyor belt	Flat conveyor belt and cross-belt
Legal for Trade Accuracy (LxWxH)	5 x 5 x 2 mm	5 x 5 x 2 mm
Legal for Trade Approvals	NTEP, MID	
More Information	www.mt.com/TLD950SH	www.mt.com/TLD950MH

*Certain conditions apply


TLD250 Static Dimensioner

User-Friendly, Adaptable Design

The cost-effective TLD250 static dimensioning system is engineered to automatically dimension parcels and packages in post offices, sorting facilities, distribution centers and warehouses. With only three main components, the TLD250 features an adaptable design and can be placed on a desk or mounted on a wall, enabling convenient ergonomic positioning to maximize productivity.

► www.mt.com/TLD250

Camera-Based Measurement Technology
The TLD250 features a vision-based sensor with intelligent algorithms to capture measurements in less than 2 seconds, even for non-cuboidal objects, and provides photo proof for claims processing.

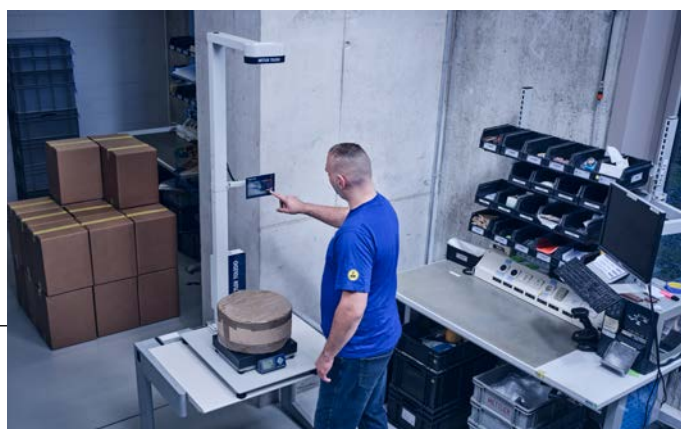

Easy Setup and Operation

The 7" touchscreen display offers a simple setup wizard, live images, alerts and measurement results to streamline operational efficiency.




Flexible Connectivity

Easily integrate with a scale, barcode reader and host systems using RS-232, USB Keyboard Wedge, HIDPOS, Ethernet or Bluetooth.



Rugged and Durable

The rugged mild steel stand and base plate protect your investment from damage even in the most demanding environments.

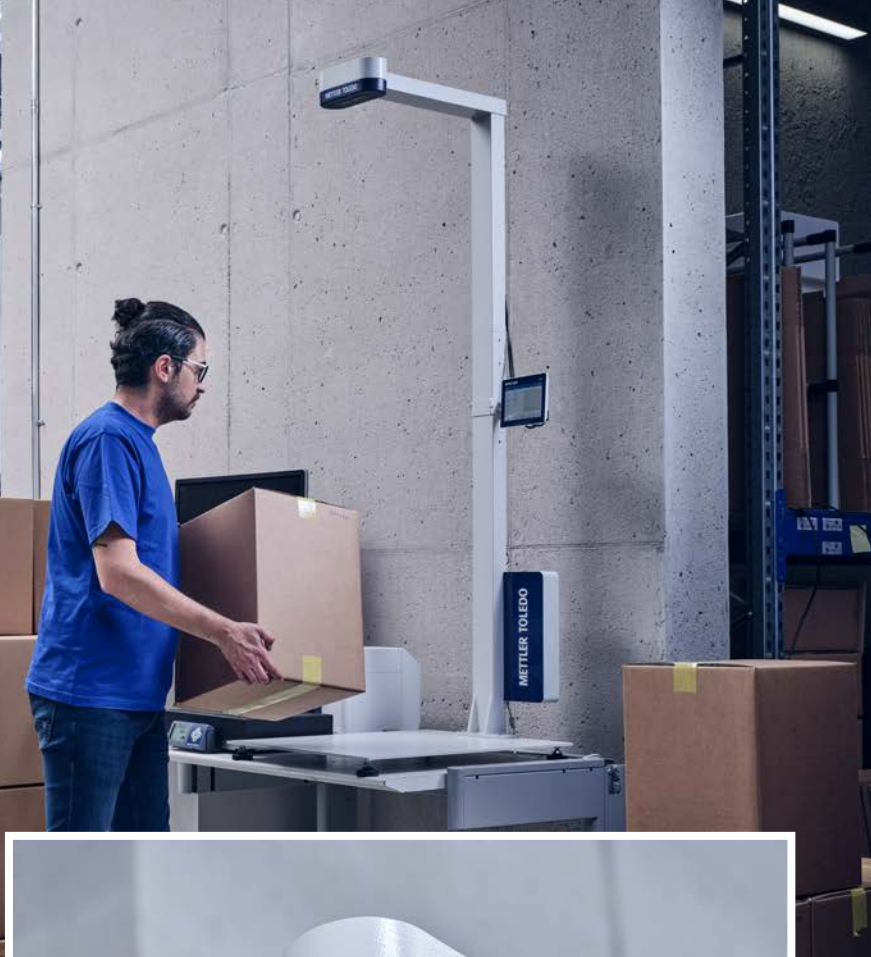

TLD250 Technical Specification*

Combine with a scale and barcode reader to achieve a complete dimensioning, weighing and ID solution suited for retail, warehouse and distribution centers. TLD250 is also adaptable to different height arrangements to meet your operational conditions.

Dimensioning Accuracy	Cuboidal: +/- 5 mm (0.2 in) Non-cuboidal: 10 mm (0.5 in)
Dimensioning Range (LxWxH)	Min: 60 x 60 x 60 mm (2.4 x 2.4 x 2.4 in) Max: 1000 x 600 x 600 mm (39 x 24 x 24 in)
Measurement Time	1 - 2 seconds
Object Shape	Cuboidal and non-cuboidal objects (cylinder, polygon)
Object Surface Characteristics	Opaque. Note: highly reflective surfaces may cause performance deviations.
Scale Interface	USB (HIDPOS)
Host Interface	Standard: 1 x RS232, 1 x USB, 1 x Ethernet Optional: Bluetooth

*Product ready in Q4 2022



MID FCC


CSN810 TableTop™

Improve Manual Operations

The CSN810 TableTop™ can be easily set up in any type of parcel handling operation. The compact workstation captures parcel dimensions, weight and ID in low-to-medium throughput operations or the hospitable area of an automatic sorting system.

► www.mt.com/CSN810

When built into the hospitable area of an automatic sorting system, the CSN810 TableTop offers the ideal solution for capturing data on rejected parcels.

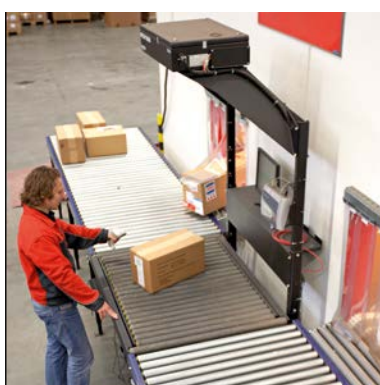

Fast, Paper-Free Measuring

Improve productivity by automating the measuring process. Simply scan the barcode and capture dimensions and weight automatically.



Simple Integration

Simple set-up and seamless communication to IT systems means the CSN810 is easily incorporated into existing processes.



Easy to Use

A user-friendly graphical interface and ergonomic system design requires little operator training. Accurate, reliable results are guaranteed.



Static Dimensioning, Weighing and Scanning

CSN810 TableTop™

The CSN810 TableTop is supplied with either a flat or roller table. It also comes in an extra-large version where the flexibility to measure larger goods is required. Specifications vary depending on the model selected.

Dimensioner Accuracy	± 5 mm
Dimensioning Range (LxWxH)	Min. object size: 50 x 50 x 50 mm Max. object size: 1,200 x 900 x 900 mm
Weighing Range	0.4 kg – 150 kg
Scale Resolution	± 20 g
Object Throughput	Approx. 400 per hour
Measurement Time	3 seconds
Object Shape	Rectangulars
Legal for Trade Approvals	NTEP, MID and MC
More Information	www.mt.com/CSN810


TLD870 – Static Pallet Dimensioning

Simple, Fast, Accurate

Freight companies need to measure pallets quickly for revenue recovery, costing, invoicing and load planning. The TLD870 speeds up the measuring process and keeps operations running smoothly.

► www.mt.com/TLD870

OCTO ImageCapture™ takes a picture of each shipment for proof of condition, content and measurement using a legal-for-trade system.

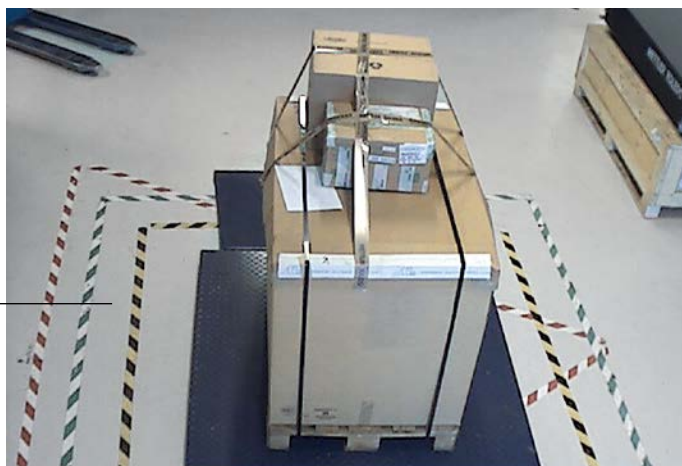

Fastest Measurement

Quick measuring time allows you to measure more pallets more efficiently. Recover revenue on up to 240 pallets an hour without impeding operations or missing cut-off times.



Easily Measure Any Pallet

Some pallet wrappings cause problems for dimensioners. The TLD870 gives an accurate reading on 99 percent of surface types for easy, efficient revenue recovery.



High Uptime, Low-Cost Service

For revenue recovery you can rely on, choose a pallet dimensioner that is designed for tough, industrial environments with no need for regular replacement of wear parts.



Fast, Efficient and Hassle Free

TLD870 Pallet Dimensioner

The TLD870 captures dimensions of any pallet in a matter of seconds. Combine it with floor or forklift scales to form a complete pallet dimensioning, weighing and scanning solution.


Dimensioner Accuracy (LxWxH)	± 10 x 10 x 10 mm
Dimensioning Range (LxWxH)	Min. object size: 200 x 200 x 100 mm Max. object size: 2,500 x 2,500 x 2,600 mm
Object Throughput	Approx. 240 per hour
Measurement Time	2 seconds
Object Shape	Any shape
Surface Characteristics	Most surfaces
Orientation	Most stable side down
Legal for Trade Approvals	NTEP, MID and MC
More Information	www.mt.com/TLD870

TLD970 – Dynamic Pallet Dimensioning Non-Stop, In-Motion Measuring

To keep efficiency at its peak, you need a pallet dimensioner that doesn't put restrictions on your operation. The TLD970 measures trucks traveling at speed, requiring no slow-down or careful positioning of the truck. This solution integrates so seamlessly into operations you won't even know it's there.


► www.mt.com/TLD970

The smart, patented design of the TLD970 takes full advantage of METTLER TOLEDO's best-in-class dimensioning technology to record all data needed for in-motion pallet measurement.

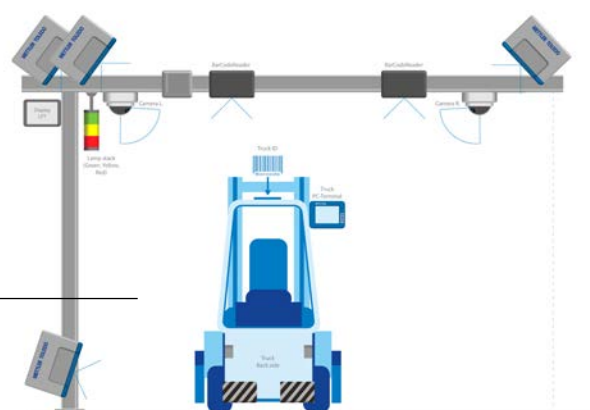


Improve Efficiency By up to 70%

Measure up to 720 pallets an hour in a fully automatic, non-stop process.

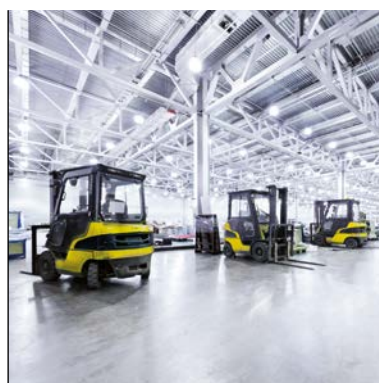


No Slow Down, No Measuring Restrictions

Simply drive through and measure without thinking about forklift speed or position.

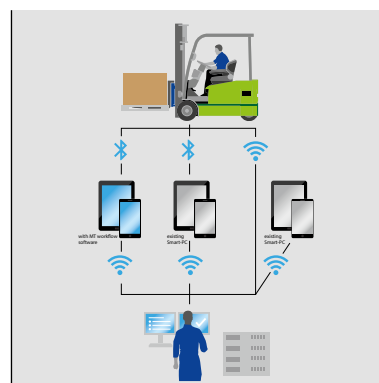

One Efficient Process

Combine dimensions, weight, pallet ID and image for a complete data profile on every piece of freight you handle.

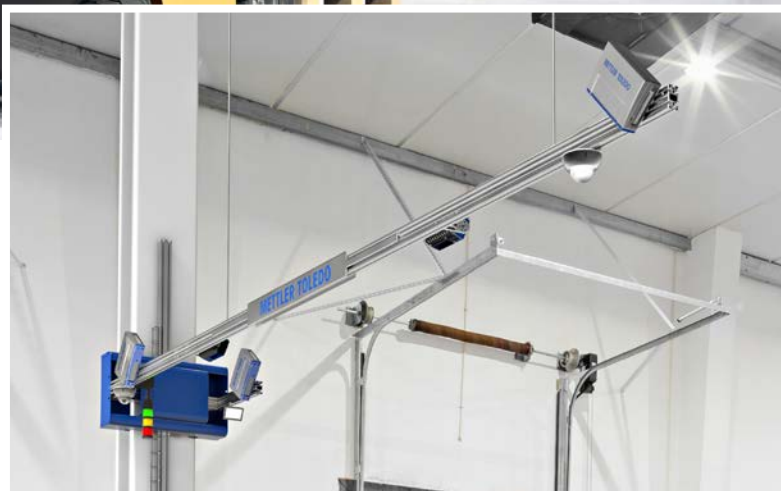

Automatically Measure Any Pallet

No Restrictions


Achieve high accuracy on almost any pallet passed through with a forklift truck.

Dimensioner Accuracy (LxWxH)	± 20 x 20 x 10 mm (NTEP and MID Approved)
Dimensioning Range	Min. object size: ± 200 x 200 x 100 mm Max. object size: 168 x 96 x 102 in (NTEP) Max. object size: 2500 x 2500 x 2600 mm (MID)
Pallet Throughput	720 pallets an hour
Measurement Time	Under 1 second
Speed	Legal for trade measurements of pallets on forklift trucks traveling up to 10 MPH (NTEP) or 15 KM/H (MID)
Object Shape	Any shape
Surface Characteristics	Most surfaces
Orientation	Multi-directional scans with pallet positioned on forklift truck
More Information	www.mt.com/TLD970

Note: The TLD970 is currently only available in select markets. Inquire with your local representative about availability in your area.



Providing Service Solutions Across Your Value Chain

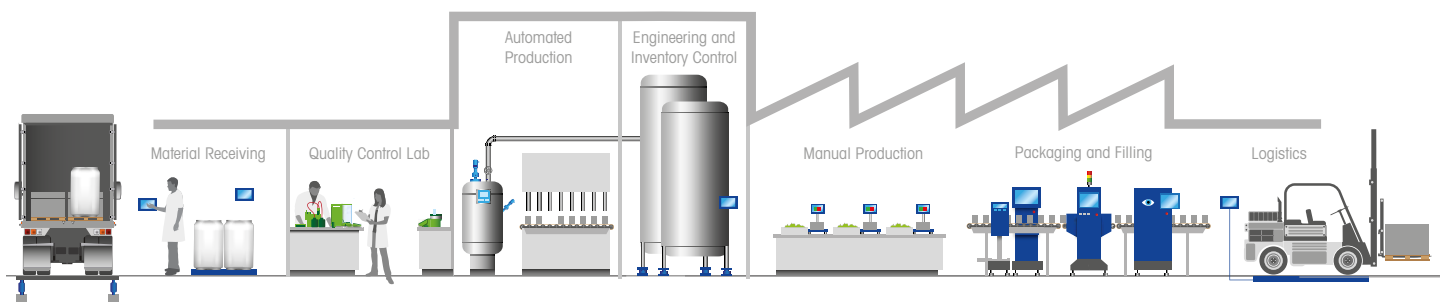

Providing Service Solutions

Across Your Value Chain

272

A Complete Service Offering

For the Entire Product Life Cycle

274

Installation and Extended Care

Ensure a Perfect Start

276

Equipment Qualification

Peace of Mind on Test Results

278

Preventive Maintenance

For Proven Precision and Reliability

280

Compliant Under any Circumstances

With Calibration and Verification Services

282

RapidCal™ Tank Scale Calibration

High-Capacity Tank Scale Calibration

284

User Training and Application Support

Confidence and Know-How

286

Good Weighing Practice™

Tune Your Weighing Process

287

Uptime – Repair and Support

Rely on the Manufacturer's Competence


288



Providing Service Solutions Across Your Value Chain

Whatever the application, we provide you with a tailor-made service solution independent of industry, environment or regulation based on our four values: uptime, performance, compliance and expertise. We support you in mastering your daily challenges. This helps you guarantee product quality, on-time deliveries, regulatory compliance and appropriate user competences.

► www.mt.com/service

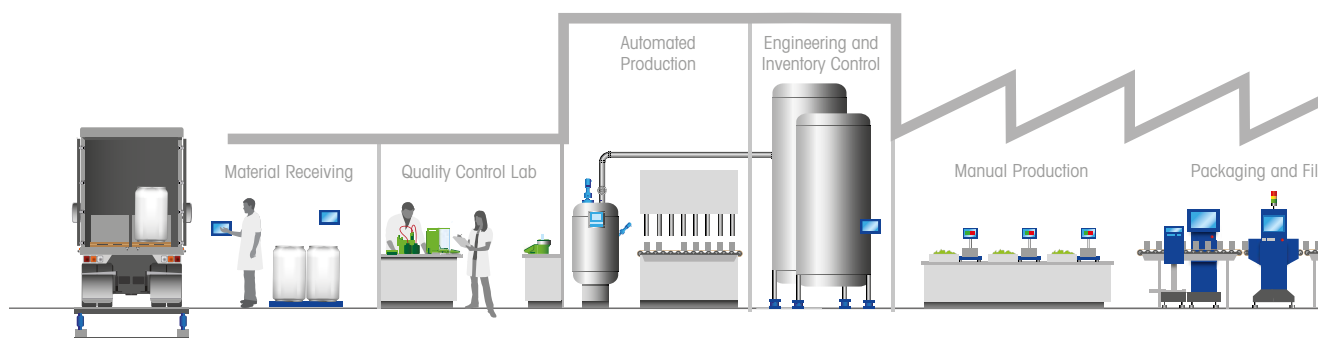

Our instruments meet the highest technical standards.

Are you aware of your most important performance-assurance needs?

Are fast intervention and turn-around times crucial to meet your shipment and delivery dates?



Uptime

You require every minute of uptime. This means guarding against equipment breakdown, parts failure and "wear and tear" issues.

Are your measurement results meeting productivity, quality and regulatory requirements?



Performance


With periodic preventive maintenance, you achieve consistently accurate results, avoiding unexpected downtime and saving money.

Does the accuracy of your measurement equipment meet your quality requirements?



Compliance

Whether you operate under ISO 9001 or strict pharmaceutical regulations, you require documented testing procedures and an accepted calibration certificate.

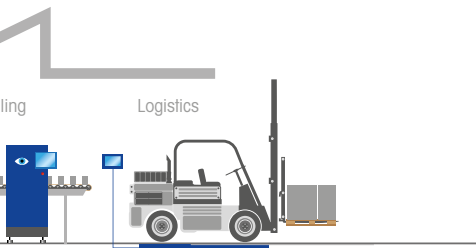

Do you know how to apply metrological concepts, safety procedures and food and pharma standards to optimize your process?



Expertise

Ensure you receive training and consultation on measurement technology, regulations and applications.

Over 5,000 Factory-Trained Service Specialists Worldwide

Global Presence

We serve our customers worldwide with one of the largest sales and service networks in the industry to assist you in increasing the efficiency, cost-effectiveness, safety and reliability of your operational processes. Our geographically-focused market organizations ensure close relationships with users. These organizations have the flexibility to adapt support and service offerings to different user requirements.

Our factory-trained and authorized service technicians help guarantee:

- Continuous operational manufacturing quality and maximized uptime.
- Comprehensive, audit-proof and fully traceable electronic certificates.
- Consistency in procedures and certified, traceable tools.
- Highest operational performance for your compliance needs with combined equipment installation and qualification.

A Complete Service Offering For the Entire Product Lifecycle

We support and service your equipment throughout its entire lifecycle, from installation, preventive maintenance and calibration to equipment repair. Our experience across these areas ensures you receive high-quality service. Through efficient practices, we minimize costs throughout the service call – an important feature that distinguishes us from our competitors.

► www.mt.com/service

Lifetime Peak Performance

With METTLER TOLEDO, you selected the most precise and reliable equipment possible and we want to ensure your absolute satisfaction over the lifetime of your equipment. Discover more about our service expertise and the benefits we can provide to you through all stages of the product's life cycle.




Good Weighing Practice™

GWP® is a METTLER TOLEDO program for accurate weighing. From selection of suitable equipment to proper installation, calibration and routine testing, GWP® ensures your scale is performing accurately and is fit-for-purpose.



Installation and Qualification

StarterPac guarantees professional installation, configuration and user familiarization for the full performance right from the start. IPac adds qualification services to comply with external regulations.

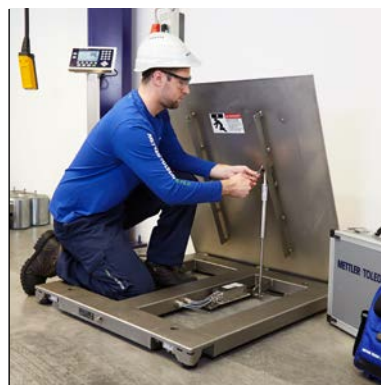

Maintenance and Repair

Care contracts ensure continuous performance and maximum availability of equipment and software solutions. Keep maintenance budgets under control and get back up and running quickly in the unlikely event of a breakdown.



Calibration and Verification


To ensure accuracy over time, assess the performance of your device with the Accuracy Calibration Certificate (ACC).

- Proves that the device is fit-for-purpose with tolerance testing
- Specifies a risk-based routine testing and calibration plan with GWP® Verification



Training

Solid skills for equipment operations, quality assurance and maintenance are key to achieving maximum performance. Our comprehensive training courses provide you with these skills so you can use your equipment effectively on a day-to-day basis.

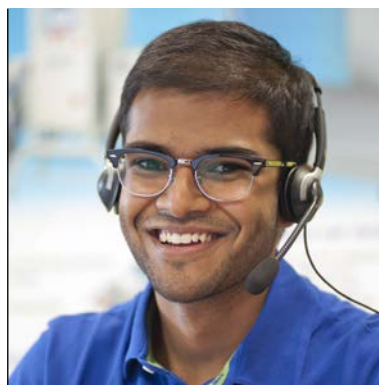

Remote Services

Trained and certified METTLER TOLEDO specialists ensure complete on- and off-site support over the entire product lifecycle. Remote services empower you to manage equipment performance more efficiently and economically.

Installation and Extended Care

Ensure a Perfect Start


You expect your new equipment to fulfill all requirements right from the start. Our factory-trained service engineers install your instrument according to the manufacturer's requirements and carry out practical operator training. Safe, routine operation is ensured so you can meet quality and regulatory standards from the beginning.

► www.mt.com/service




StarterPac

The StarterPac is designed for professional product installations and solid user familiarization in low-regulation or unregulated industries.

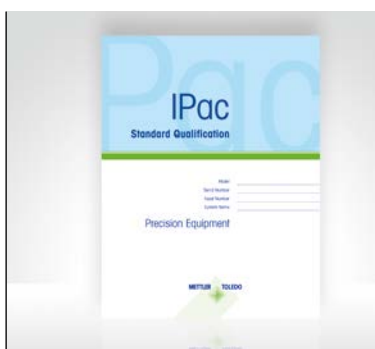

IPac

The IPac is designed for regulated industries with the need for ensuring that products are safe and of a consistently high quality.

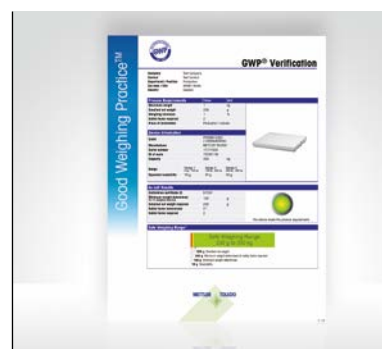

AccuracyPac

The AccuracyPac is designed to assure compliance and optimal performance with a risk-based routine test plan.

Extended Care – Reliable Results, Secured Uptime and Full Cost Control

The first year of equipment operation is essential to ensure ongoing performance. The Extended Care Program protects your investment beyond the limited scope of the legal warranty with regular testing and maintenance, priority on-site service and technical hotline assistance.

Coverage	Regular Warranty	ExtendedCare
Preventive Maintenance	12 months	24 months
Annual inspection and cleaning, annual performance tests to manufacturer standards, adjustments if necessary, replacement of worn-out parts		●
Coverage in Case of Technical Problems	12 months	24 months
First year of warranty, labor cost included		●
Intervention on-site	●	●
Additional year of warranty, priority for intervention, travel cost included, hotline technical assistance	Only for some equipment, mail-in otherwise	●
More Information	www.mt.com/service	



"The correct equipment setup and user training improve your productivity."

Save time and be safe right from the start!
METTLER TOLEDO installation ensures:

- ✓ Measurement accuracy thanks to expert installation and initial qualification
- ✓ Proof of optimum equipment performance
- ✓ Avoidance of out-of-specification measurements
- ✓ Assurance of conformity by documented test results
- ✓ Improved productivity through professional user training

Equipment Qualification

Peace of Mind on Test Results

Our qualification services can help you go the extra mile to ensure your equipment is running optimally and in a safe and compliant manner. We also ensure your environment is suitable for the equipment's intended purpose and that operators are trained on equipment functions, cleaning procedures and basic diagnostics.

► www.mt.com/service

Professional Equipment Qualification Offers You:

- Documented performance through application of standardized calibration and performance verification procedures
- Cost savings in testing thanks to optimized qualification protocols
- Expert support for test development providing confidence that the equipment consistently performs according to process requirements
- Routine operational support protecting your investment and ensuring long-term data safety and full budget control

METTLER TOLEDO Installation Pacs

	StarterPac	IPac	AccuracyPac
Scale Selection			
GWP® Recommendation	●	●	●
Installation			
Installation and Setup Onsite	●	●	●
User Familiarization	●	●	●
Installation Qualification (IQ)	●	●	●
Operational Qualification (OQ)		●	●
Performance Qualification (PQ)		●	●
Maintenance Qualification (MQ)		●	●
Calibration and Routine Testing			
Accuracy Calibration Certificate (ACC) ¹	recommended	recommended	●
Process Tolerance Assessment: GWP® Certificate			●
Risk-based testing and calibration plan: GWP® Verification			●

¹ Available with accredited certificate ISO 17025



Benefit from Qualification Services

Thanks to METTLER TOLEDO's equipment qualification services, you can be sure that your equipment consistently returns accurate and precise results in its dedicated working area.




Software Validation

Software validation service conducted by factory-trained service technicians provides evidence that all software requirements have been implemented correctly and completely, delivering traceable results according to your system's requirements.



Calibration and Performance

We carry out initial calibration and performance verification to confirm optimal equipment setup and fulfillment of your process requirements, standards and regulations.

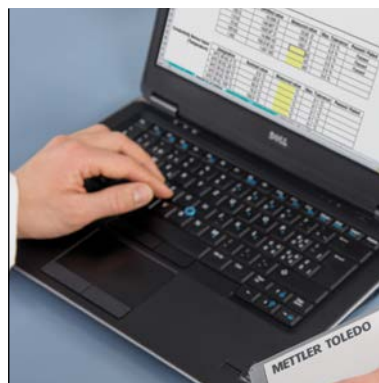

Globally Accepted Protocol

Our Installation Packs provide documentation of the original state of the equipment as well as on-going calibration and maintenance activities. This provides a complete historical data set on your equipment performance throughout the life cycle.

Preventive Maintenance

For Proven Precision and Reliability

You need to rely on your equipment; it has to be fully operational and provide correct results at all times. Your processes, equipment and documentation also have to comply with regulations. METTLER TOLEDO offers various maintenance packages to fit your specific requirements, helping you reduce costs and offering peace of mind regarding measurement quality.

► www.mt.com/service

Protect Your Equipment Against Downtime

Performance Issues and Unexpected Material Costs

Our ComprehensiveCare Package ensures maximum uptime and optimum performance at a fixed price. It gives you privileged access to our extensive expertise by offering a single solution for maintenance, consulting and reliability with full budget control. The package offers:

- Equipment inspection to help avoid unexpected downtime
- Equipment testing that confirms accuracy to ensure optimum performance
- Preferred service intervention to eliminate wait time for repairs
- Labor and spare parts coverage to ensure full cost control

METTLER TOLEDO Maintenance Packages

Coverage	BasicCare	StandardCare	ComprehensiveCare
Preventive Maintenance <ul style="list-style-type: none"> • Inspection and cleaning of all mechanical components • Inspection and testing of electronic components • Inspection for wear and damage 	●	●	●
Equipment Operational Testing	●	●	●
Preferred Service Intervention	●	●	●
Discounted Repair Labor	●	●	●
Technical Hotline Access		●	●
Repair Labor Coverage in Case of Equipment Breakdown		●	●
Spare Parts Coverage			●
Calibration and Verification	Added according to your requirements and regulations		
More Information	www.mt.com/service		



Increase accuracy, reliability and process efficiency with regular maintenance from METTLER TOLEDO Service:


- ✓ Optimum equipment performance
- ✓ Reliable operating procedures
- ✓ Traceable measurement accuracy
- ✓ Proactive protection against equipment failure
- ✓ Higher testing throughput

“Planned maintenance helps to guarantee accurate measurements and optimal equipment performance.”

Compliant Under Any Circumstances With Calibration and Verification Services

METTLER TOLEDO Service knows what it takes to stay accurate and compliant. MiraCal+, the proprietary calibration and certification system of METTLER TOLEDO, provides total consistency by guiding our service technicians through globally applicable standard operating procedures. We offer a variety of calibrations, specialized calibration tools, and professional certificates to help you get accurate results and pass audits at all times.

► www.mt.com/service

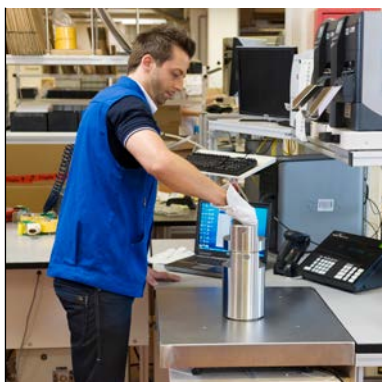

Accuracy Calibration Certificate

ACC documents scale performance by assessing the uncertainty of measurement-in-use with "As Found" and "As Left" statements. The certificate is globally standardized and fulfills EURAMET guidelines.



Accreditation and Verification

The accredited ACC 17025 gives a clear statement on the accuracy of your scale and maintains compliance through consistent procedures. To maintain accuracy over time, GWP® Verification assesses your process and defines routine check and calibration requirements.



Test for Tolerances

Assure the scale is fit-for-purpose with tolerance testing.

- **GWP® Certificate**
Use the full accuracy potential to reduce waste and improve quality and productivity
- **OIML / HB 44 Annex**
Comply with legal-for-trade requirements
- **Custom Tolerances**
Test against your own process tolerances



“With calibration and routine testing you assure process tolerances that maximize your quality, productivity, and compliance.”

Be accurate and compliant with METTLER TOLEDO's calibration and certificate service:

- ✓ Regulatory compliance by using certified and accredited calibration procedures
- ✓ Professional, easy-to-read certificates
- ✓ Audit-proof documentation
- ✓ Reliable measurement results thanks to regular instrument calibration
- ✓ Avoidance of inaccurate measurements and their cost potential

RapidCal™ Tank Scale Calibration


Maintain Accuracy for High-Capacity Scales

The new and innovative RapidCal™ calibration method from METTLER TOLEDO uses hydraulic equipment to apply downward force to the tank scale. It offers an economical and fast calibration that is accurate, traceable, and free of the need for test weights or purified liquids. This means less downtime when calibrating high-capacity tanks with no risk of scale contamination.

► www.mt.com/ind-RapidCal

RapidCal Provides the Following Benefits Over Traditional Calibration Methods:

- Up to 3x faster than flowmeter or substitution calibration
- 0.1% reference system accuracy for tank scales with capacities between 1 t – 32 t
- No risk of tank contamination
- Assured traceability with documented calibration certificate

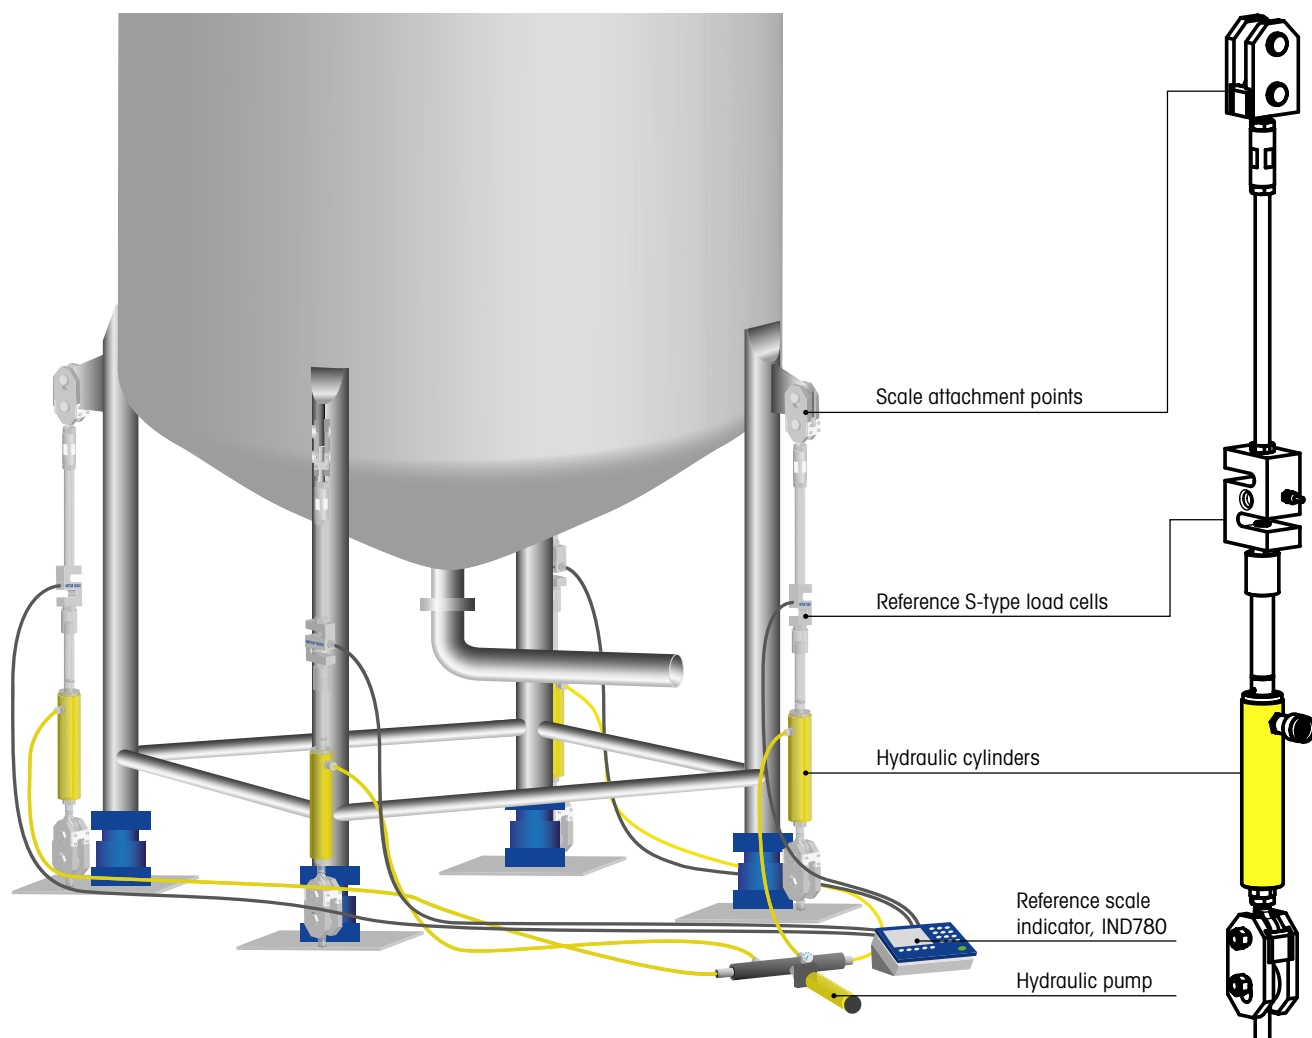




Faster Calibration Process

RapidCal Tank Scale Calibration is up to three times faster than flowmeter or substitution methods, requiring less downtime for the overall calibration process. RapidCal allows you to get back to production quicker.



High Accuracy for High Capacity

Designed for tanks between one ton and 32 tons, RapidCal provides an accurate solution to calibrate your high-capacity tanks through their full range. With an accuracy of 0.1 percent, RapidCal is more accurate than other methods.

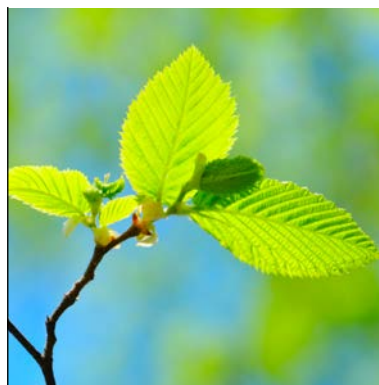

Reduced Environmental Footprint

RapidCal requires no external material for calibration. This means that no water or material is introduced into your tank, removing the need for waste disposal and reducing overall water consumption.

User Training and Application Support

Confidence and Know-How

Get the most out of your equipment. Our comprehensive training courses provide you with all the skills you need to use your equipment effectively on a day-to-day basis. Profitability, compliance, and equipment longevity are fundamental to a company's success. At METTLER TOLEDO, we believe that training plays an integral part in sustaining this process and maximizing efficiency.

► www.mt.com/service

Training Tailored to Your Needs

Our experts have developed a range of different training modules for specific equipment types and audiences to help participants gain a comprehensive understanding of their instrument and keep their processes running at maximum performance.

Training Module Contents:

- General introduction and technical basics
- Functional hands-on training in operational area
- Practical tests on respective systems and processes

Operation Training Module


Operate your equipment as efficiently as possible and provide your users with expert knowledge.

Quality Assurance Training Module

Support your quality assurance scheme and to identify and avoid possible risks.

Maintenance Training Module

Prevent unplanned downtime and carry out equipment maintenance easily.

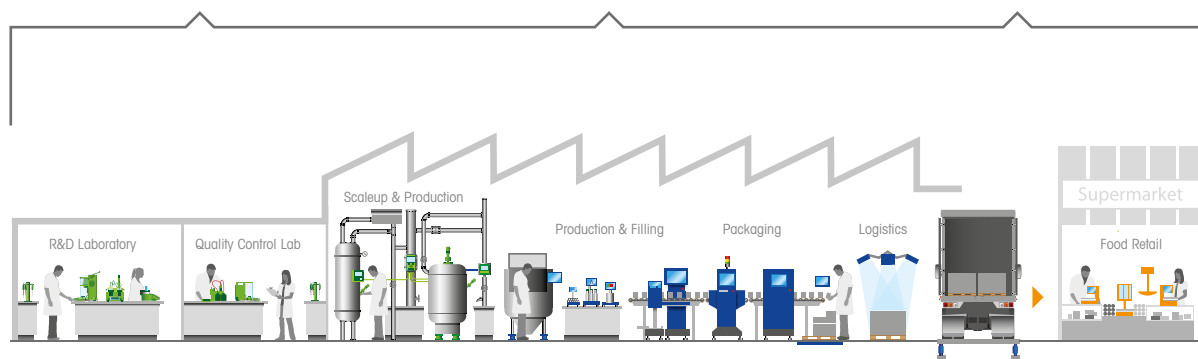


Good Weighing Practice™

Tune Your Weighing Process

**Are you sure your scale is weighing accurately? Can you verify that it is fit-for-purpose?
Do you know the simple way to achieve consistent quality, save costs and ensure compliance?**

To help you answer "Yes" to all the questions above and support you in managing your entire weighing program, METTLER TOLEDO developed the globally recognized standard Good Weighing Practice™. Here is how it works in three simple steps:

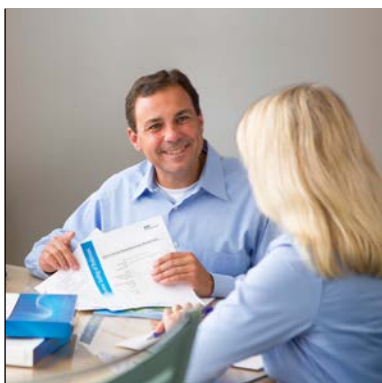

GWP® Recommendation – The Right Equipment in Place

- Make use of our weighing competence to select the right scale for your specific application. Selection is the first step to meet accuracy and process requirements.
- Gain the security you need before making a purchasing decision.
- The service is free-of-charge and easy-to-apply.



Installation Packages – Full Performance from the Start

- Ensure your new scale is running optimally in a safe and compliant manner from day one.
- Gain guidance to control environmental influences that affect the accuracy of your weighing results for enhanced accuracy.
- Make sure you have the required skills to operate and maintain scale performance in regulated environments.



ACC and GWP® Verification – Ensure Accuracy Over Time

- Assess the performance of the device by documenting the measurement uncertainty in use with the ACC Calibration Certificate.
- Prove that the device is fit-for-purpose – with the GWP® Certificate.
- Specify a risk-based routine testing and calibration plan with GWP® Verification.

With GWP® You Profit from:

- Increased yield through tighter process tolerances and optimized routine testing
- Optimal use of your weighing instrument from the smallest net weight to its maximum capacity
- Constant and consistent quality by weighing in the safe weighing range
- Audit-readiness with a full set of audit-proof documentation

Uptime – Repair and Support


Rely on the Manufacturer's Competence

Your instruments are often subject to tough environments and high utilization in critical processes. Equipment uptime is crucial to productivity. When equipment fails, immediate action is required – either onsite or at our repair center.

► www.mt.com/service

METTLER TOLEDO Service provides fast intervention to minimize downtime using proprietary tools and safe and standardized work procedures. Our repair services help you restore your equipment and gain the uptime that is critical for your productivity.

- **Onsite repair** – Fast response times from a factory-trained and certified field force using proprietary tools and original spare parts.
- **Service center repair** – Fast turnaround times for cost-effective diagnostics and repair returning equipment to factory-specifications.

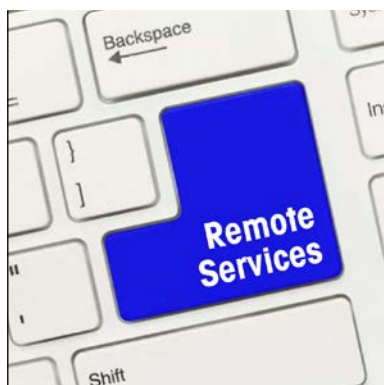

Remote Services

Remote services empower you to manage equipment performance more efficiently and economically. You gain:

- Quicker response to technical issues
- Increased equipment availability
- Remote diagnosis and repairs
- Product alert and alarm monitoring
- Predictive/proactive maintenance



Spare Parts and Kits

Our original spare parts and kits fulfill your highest expectations for quality. You can rely on our extensive inventory to meet your needs. You gain:

- Parts factory-tested to our specifications
- Most reliable parts available
- Continuous trouble-free operation
- Ensured ongoing compliance



Manufacturer's Competence

Certified METTLER TOLEDO service technicians perform fast, reliable repair services using advanced skills, tools and original spare parts. This ensures:


- Diagnostics isolate the root error cause
- Problems fixed correctly the first time
- Productivity is restored




Maximize the uptime of your equipment.
METTLER TOLEDO offers you:

- ✓ The largest service force in the industry
- ✓ Fast response times
- ✓ Factory trained and certified engineers
- ✓ Proprietary tools and spare parts
- ✓ Testing to factory specifications

"Fast reaction times,
reliable service and highly
competent technicians
helped us reduce our
costs significantly."

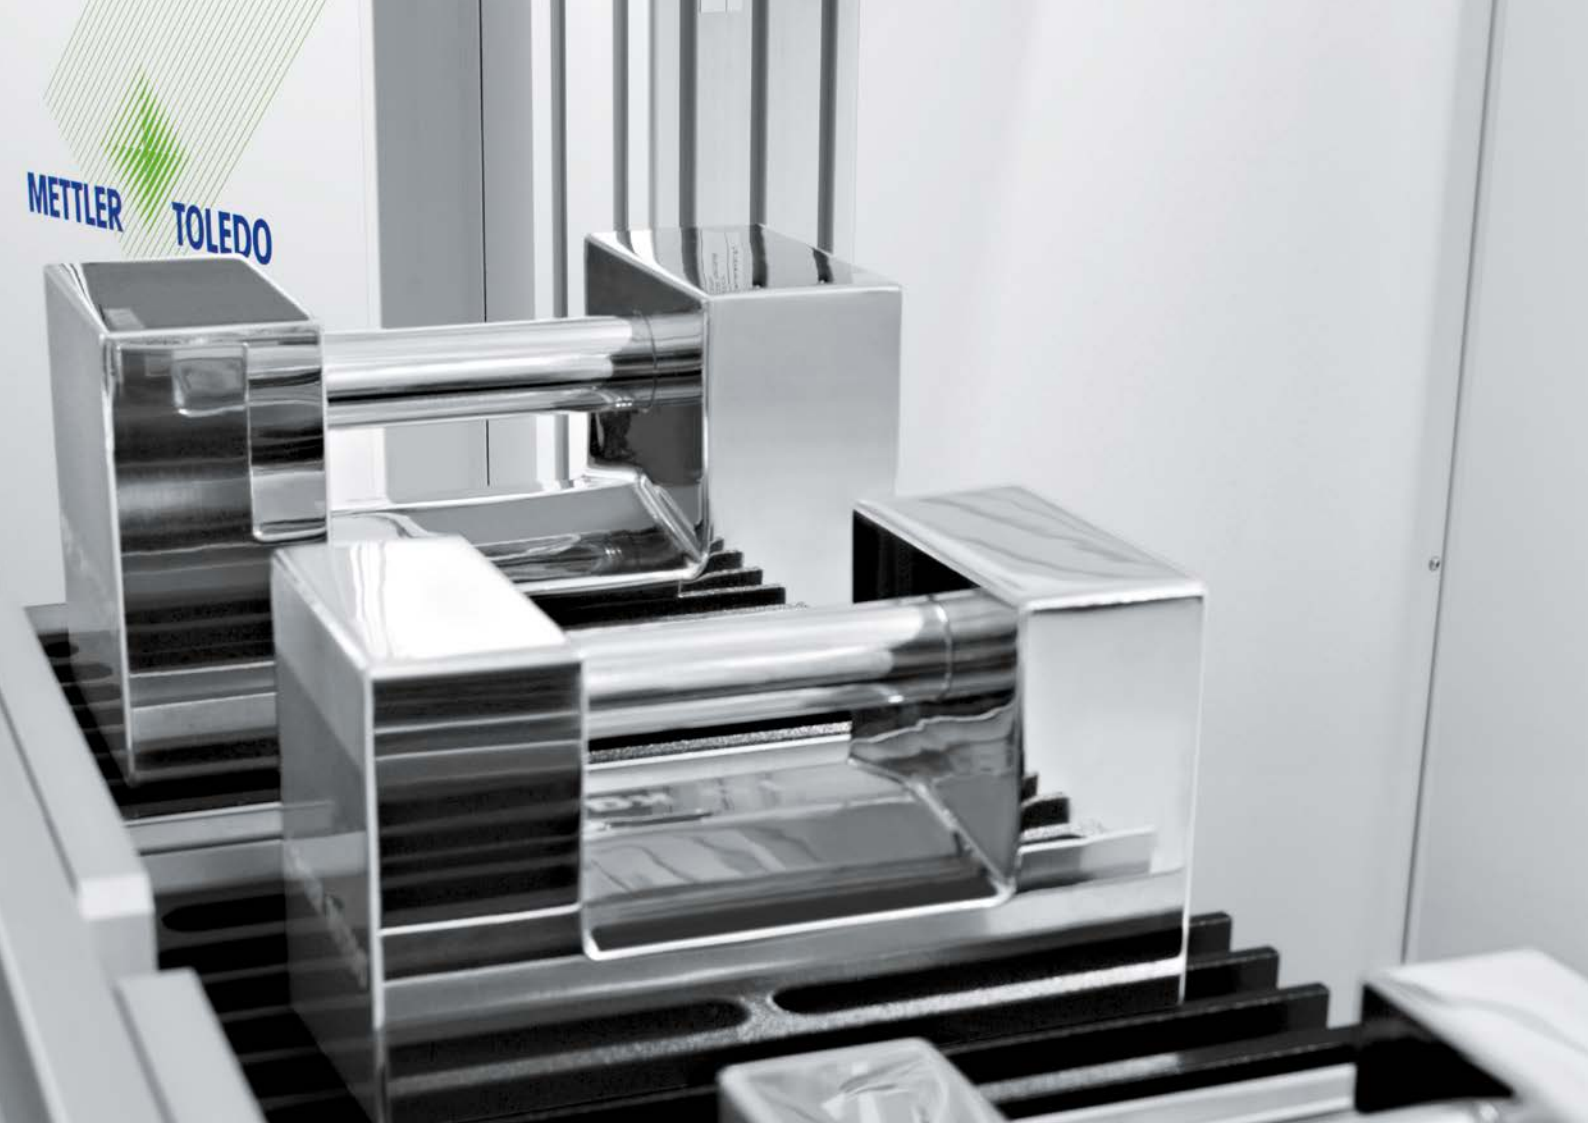

Our Solutions For Your Production

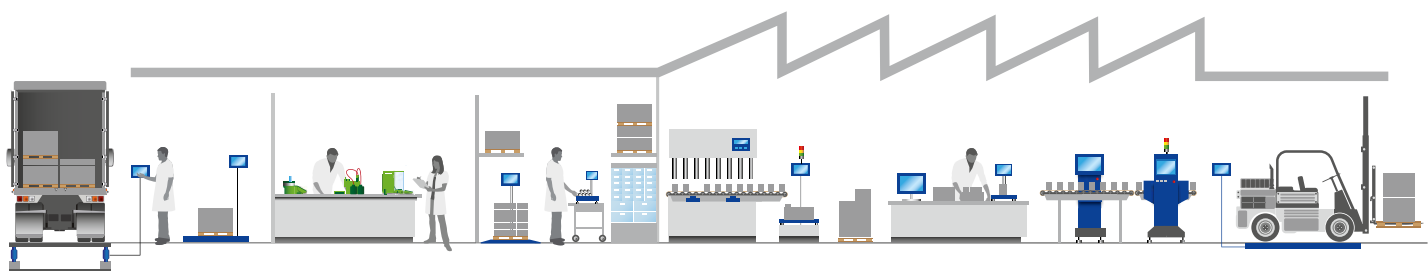

Unrivalled Expertise

To Meet Tough Requirements

292

Grip-Handle Test Weights from 1 kg to 50 kg

For Safe and Convenient Scale Testing

294

Cast Iron Weights from 50 kg to 5 t

Top Performance through Genius Design

296

Heavy-Duty Stainless Steel Weights from 100 kg to 2 t

Meet Strict Industry Requirements

298

Unrivalled Expertise To Meet Tough Requirements

METTLER TOLEDO is the world's leading precision instrument manufacturer. We supply innovative weight products and balance testing methods that move beyond current technology boundaries. Thanks to an established global network of accredited calibration laboratories, we also offer short turnaround for related calibration services. Our extensive portfolio covers weights from 0.05 mg to 5 tons in all accuracy classes and includes a variety of shapes for nearly any testing application.

► www.mt.com/weights

From Micrograms to Tons



- Calibration and Testing**
- Calibration and testing support from the world's leading precision instrument manufacturer
 - Innovative weight products and balance-testing methods
 - Established network of accredited calibration laboratories



- CarePacs®**
- Manufacturer recommended weight sets with two selected weights for testing balance weighing ranges up to 8 kg
 - Easy and quick to use testing approach supported by manufacturer SOPs
 - Test against process tolerances as low as 0.03%



- Industrial Weights**
- 1 kg – 5 tons, OIML Classes F1 – M3
 - Stackable heavy capacity cast iron weights for safe stacking and handling
 - Stainless steel grip handle weights are available for the highest quality requirements in regulated industries



Grip-Handle and Heavy Capacity Weights

For Safe and Efficient Scale Testing

As with laboratory balances, industrial scales and weighing platforms are also subject to regulations that ensure measurements are reliable and meet legal requirements. Regular testing with adequate test weights is essential. METTLER TOLEDO's grip-handle and heavy capacity weights are suitable for any application in all types of industrial environments. Choose the weight that best suits your needs out of our wide range of stainless steel and coated cast iron weights from a nominal value of 1 kg up to 5,000 kg. To gain traceability, documented weight calibration results are delivered in calibration certificates with details of conventional mass correction, uncertainty and traceability according to ISO/IEC 17025.




Grip-Handle Test Weights

For Safe and Convenient Scale Testing

While traditional knob weights do not allow safe stacking, cylindrical and rectangular weights assure better safety – an important aspect when testing higher-capacity balances. Grip-handle weights are available for multiple applications and environments. Choose between polished, glass bead blasted or painted weights for applications in wet, dusty, harsh or clean-room areas.

► www.mt.com/industrial-weights

	OIML F1 Stainless Steel		OIML F2, M1 Stainless Steel	
	Perfect to satisfy the highest requirements in regulated industries		Special design ensures safe stacking and flexible loading	
				
Suitable For	Official bodies, regulated and hygienically sensitive areas (e.g. GFSI, BRC, or FDA compliant)		Frequent and/or heavy duty use, all industrial areas (e.g. GFSI, BRC, or FDA compliant)	
Long-Term Stability	★★★★★	High gloss polishing Forged stainless steel	★★★★☆	Fine-turned surface
Handling Safety	★★★★☆	Sturdy aluminum carrying box included	★★★★★	Centering rim on top prevents weights from falling off the stack
Target Load Flexibility	★★★☆☆	Rectangular design Flat top and bottom surface	★★★★★	Dedicated carrier for safe accumulation up to 200 kg
Nominal Value (kg)	1, 2, 5, 10 and 20		5, 10, 20 and 50	
Tolerance MPE	OIML class F ₁		OIML class F ₂ , M ₁	
Calibration Certificate	Yes		Yes	
Material, Grade	Stainless steel, SS 304		Stainless steel, SS 303	
Density ρ	7,900 kg/m ³ ± 140 kg/m ³		7,900 kg/m ³ ± 140 kg/m ³	
Susceptibility χ	< 0.2		< 0.8	
Surface	High-gloss finish		Precision-turned finish	
Adjusting Cavity	According OIML, Type 1 (Screwed sealing plug; Stainless steel)		According OIML, Type 1 (Sealing plug; tin)	
Accessories	Included: • Lockable aluminum box and nylon gloves		On request: • Plastic box • Weight carrier - Nominal value 40 kg - Stacking up to 200 kg (8 x 20 kg)	

Requirement fulfillment scoring: ★★★★★ very good ★★★★☆ good ★★★☆☆ fair ★★☆☆☆ limited ★☆☆☆☆ none



Select the Right Weights

Do you know which test weights match your measuring, compliance and quality requirements? If not, request a free GWP® Recommendation and Sample Verification which will give you the right weight class, calibration and routine testing frequencies with test SOPs that allow you to pass any audit.

► www.mt.com/GWP-recommendation

OIML M1 Stainless Steel

Designed for heavy-duty operation in harsh conditions



OIML M1–M3 Cast Iron

An economic approach for general industrial applications



Frequent and/or heavy duty use, all industrial areas (e.g. GFSI, BRC, or FDA compliant)

Use in non-regulated and/or harsh environmental areas



Glass bead blasted and passivated surface



Two-component coating



Rectangular design
Flat top and bottom surface



Milled flat top surface for easy and secure stacking



Dedicated carrier for safe accumulation up to 500 kg



Dedicated carrier for safe accumulation up to 500 kg

1, 2, 5, 10 and 20

5, 10, 20 and 50

OIML class M₁

OIML class M₁, M₂, M₃

Yes

Yes

Stainless steel, SS 304

Cast iron, EN-GJL-HB200

7,900 kg/m³ ± 140 kg/m³

7,200 kg/m³ ± 600 kg/m³

< 0.8

–

Glass-bead blasted, passivated

Painted (two-component coating)
M₁: Pantone 648 C, M₂: Pantone 647 C,
M₃: Pantone 646 C

According OIML, Type 1
(Sealing plug; aluminum)

According OIML, Type 2
(Sealing plug; aluminum)

On request:

- Aluminum box
- Weight carrier
 - Nominal value 40 kg
 - Stacking up to 500 kg (23 x 20 kg)

On request:

- Aluminum box
- Weight carrier
 - Nominal value 40 kg
 - Stacking up to 500 kg (23 x 20 kg)


Cast Iron Weights

Top Performance through Genius Design

From many years of experience, METTLER TOLEDO knows that handling heavy capacity weights to test scales always poses certain risks. To minimize manual handling, METTLER TOLEDO has designed weights that enable safe lifting, including four-side and top access by fork lifts, cranes and hoists. This helps with safe operation and limits unnecessary costs. Your personal safety is our priority.

► www.mt.com/industrial-weights

Swiss-engineered evaporative-pattern casting technology leads to smoother surfaces than ever before. A two-component coating rejects dust and dirt and protects the weight from corrosion and scratches.

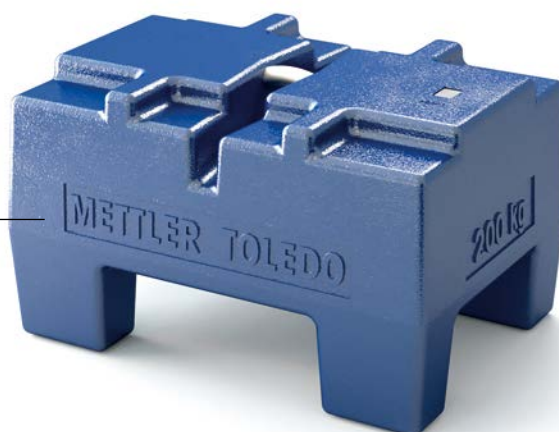


Safe Stacking

Our innovative design approach allows combining and stacking weights of different sizes. For crane lifting, straps are looped through handles-making it a "fail-safe" system.



Safe Moving and Handling

Weight dimensions fit all common pallet jacks and fork lifts and allow access from all sides. Heavy-duty, stainless steel handles facilitate the lifting of single weights or stacks by hoists and cranes.

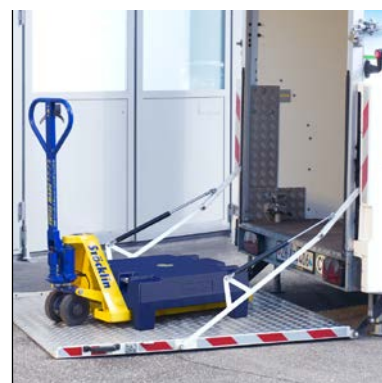

A Cost-Cutting Approach

Weights are designed to fit on standard pick-up trucks or trailers. Lower maintenance and gas costs compared to a full-size commercial truck result in economic benefits.



Technical Specifications

Nominal Value (kg)	50, 100, 200, 500, 1,000, 2,000, 5,000
Tolerance	OIML class M1 (acc. to OIML R111-1:2004)
Calibration Certificate	Yes (COFRAC)
Material Weight	Cast iron: EN-GJL-HB200, reg. DIN EN 1561
Material Handle	Stainless steel
Density Weight	7,200 kg/m ³ ± 600 kg/m ³
Polarization µM	< 250 µT
Surface	Painted (Pantone 648 C) Two-component coating
Accessories	PVC cover included, lifting straps on request



Heavy-Duty Stainless Steel Weights

Meet Strict Industry Requirements

If greater measurement accuracy or environmental compatibility are requested, as is often the case in regulated industries or testing labs, stainless steel weights are preferred. METTLER TOLEDO's heavy-capacity stainless steel weights satisfy the maximum permissible error standards for OIML classes F1 and F2 and are available in rectangular or cylindrical shapes from 100 kg up to 2,000 kg.

► www.mt.com/industrial-weights



Top Quality

METTLER TOLEDO puts the highest demands on the quality of its products. Each step in production is strictly controlled, from the original steel billet to the finished weight.



Impeccable Finish

A mirror-polished surface makes the weights easy to clean and provides the best possible corrosion resistance. This ensures near-perfect stability over the weight's life span.



Laser Markings

The high-specification polished stainless steel surface is marked in accordance with OIML guidelines using the latest laser technology. Customer-defined marking is also available.



Technical Specifications

	100 kg	200 kg	500 kg	1,000 kg	2,000 kg
Shape (cylindrical)	C	C	C	C	C
Tolerance	OIML cl. F ₁ , F ₂ (acc. To OIML R111-1:2004)				
Calibration Certificate	Yes (COFRAC)				
Material	Stainless steel				
Density ρ	7,900 kg/m ³ \pm 140 kg/m ³				
Susceptibility χ	< 0.2				
Polarization μOM	< 25 μT				
Surface	High-gloss finish				
Adjusting Cavity	Yes				
Accessories	Cylindrical: Aluminum box included				



Expertise Library

Tools for Effective Solutions

Whether you are new to your industry or role, or the most senior person at your operation, there is always an opportunity to learn. Our expertise library provides know-how specific to your industry or application, including:

- Guides
- Videos
- Product Brochures
- Webinars
- Case Study's
- Free Posters
- Infographics
- Technical Specifications
- And more!

Visit your knowledge center today!

► www.mt.com/ind-library



www.mt.com/industrial

Visit for more information

METTLER TOLEDO Group
Industrial Division
Local contact: www.mt.com/contacts

Subject to technical changes
©09/2022 METTLER TOLEDO. All rights reserved
Document No. 44099957 F
MarCom Industrial