



Datasheet

RS PRO Hermetically Sealed Enclosures

Stock number: 1920724







Product Details

Hermetic enclosure ideal for applications requiring protection against water ingress. Supplied with silicon gascet that provides IP65 rating. Lid manufactured with recess for mambrane keypads and overlays. Threaded brass inserts ensures reliable assembly of the enclosure.

Features and Benefits

- Made of ABS
- Available in light gray color
- Protection against liquids and solid objects: IP65 rating
- Shock protection level: IK08
- Supplied with silicon gasket and four screws
- Lid with recess for keypads and overlays
- Threaded brass inserts for reliable assembly.





Enclosures For Wall Mounting
Full with lug (U)
ABS
Hermetic with brass bushing (H TM)
40.0 mm
70.0 mm
105.0 mm
Lightgray (J)
IP65
IK08
RoHS Compliant
Screw 3/20: 4.0 pcs
CE/032/18, Z/12/029118














Max PCB size

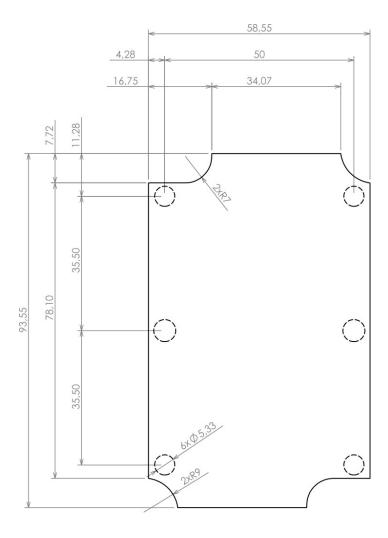

Dashed line shows outline of the mounting boss under PCB board Recommended mounting holes diameter ø4mm All dimensions are given within +/-0,5mm tolerance



