
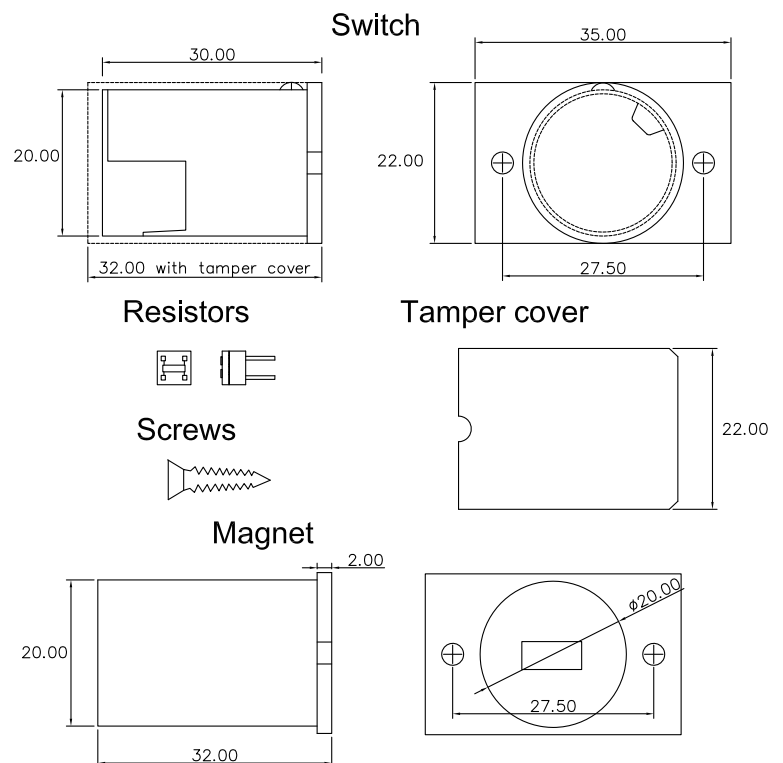


Datasheet

Stock No: 9184706

## RS Pro Grade 3 Flush alarm contact

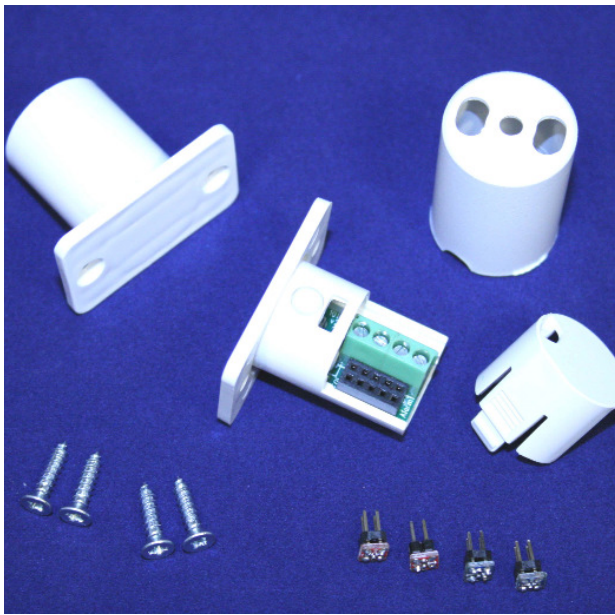

### Specifications

- Normally open contacts
- Reed based magnetic interference detection
- Maximum switching voltage 30 V DC
- Maximum switching current 0.5 Amps
- supervised end of line zone protection
- Tamper protection
- 14mm operating distance
- Adjustable contact resistance with supplied resistors
- Operating temperature -40° to +50° Celsius
- High impact Polystyrene housing material