


För icke direkt toleranssatta mått gäller toleransklass  
 General tolerances if not otherwise stated

NOM DIM MM		TOL CLASS		
From	To	A	B	C
(1)	6	±0.05	±0.1	±0.2
(6)	30	±0.1	±0.2	±0.5
(30)	100	±0.15	±0.3	±0.8
(100)	300	±0.2	±0.5	±1.2
(300)	1000	±0.3	±0.8	±2

Hål / Holes H13



Skarpa kanter brutna där ej annat anges.  
 No sharp edges unless otherwise specified.

LASERMÄRKNING/LASER MARKING:  
 TEXTFONT: GEN-ISO  
 Datumkod / Date code "YYYYYY"  
 Serienummer / Serial number "XXXXXXX"

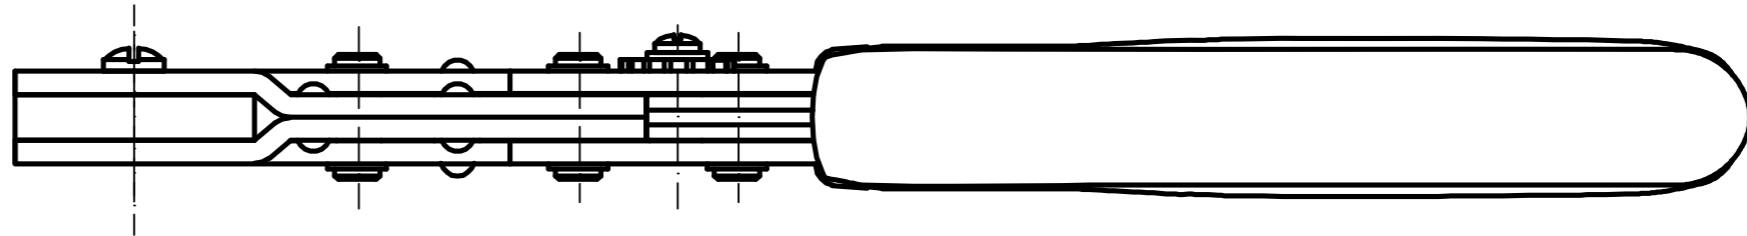

Övriga generella toleranser enligt ritning 4100-4644.  
 Additional general tolerances in accordance with drawing 4100-4644.

A - A

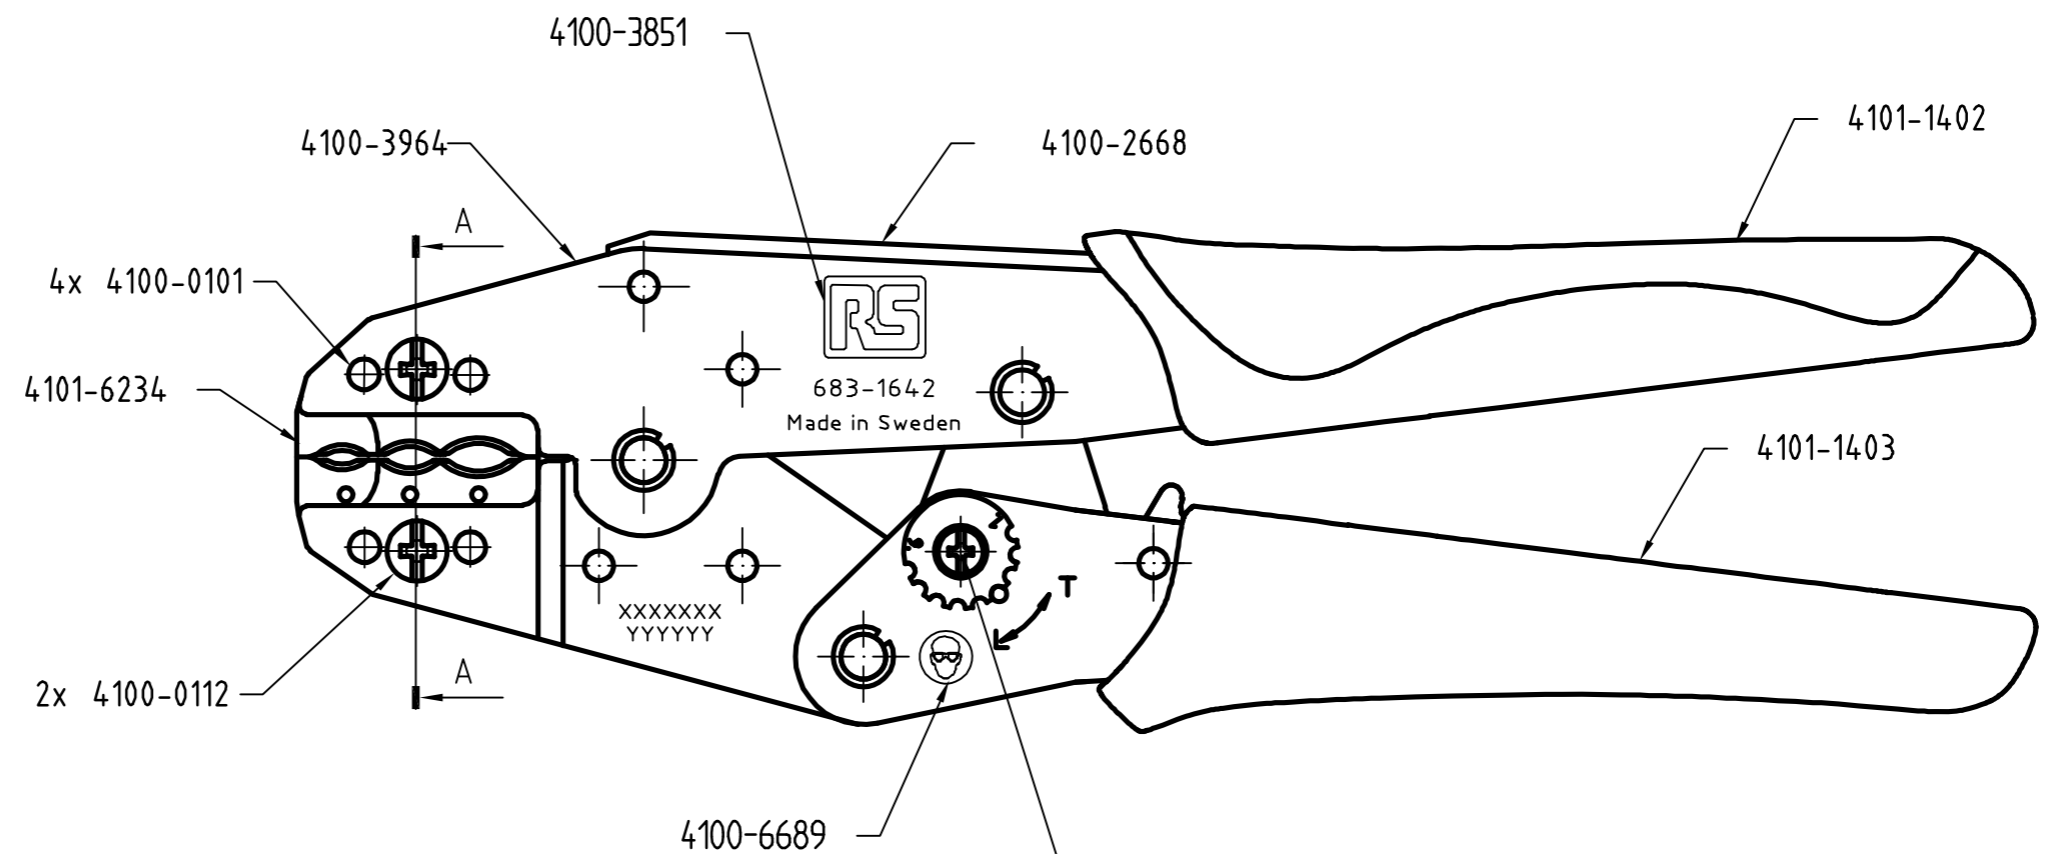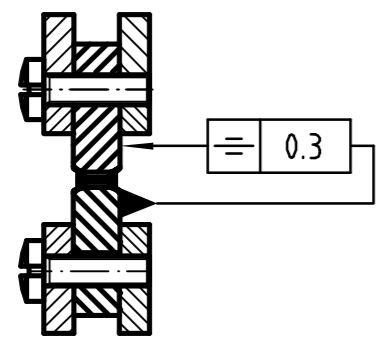

FÖRSPÄNNING / PRELOAD: 200 ± 40 N

Tolkmått / Gauge dimensions (mm)		
URTAG	Gåtolk	Stopptolk
NEST	GO	NO GO
RÖD / RED	∅1.90	∅2.00
BLÅ / BLUE	∅2.80	∅2.90
GUL / YELLOW	∅3.75	∅3.85

Packas enligt förpackningsritning 4101-2725  
 Packed according to drawing 4101-2725

Denna ritning är Pressmaster AB:s egendom. Skyddad av gällande lag.  
 This drawing is the property of Pressmaster AB. Protected in accordance with prevailing law.

Material		Behandling/Treatment		Status	
Konstr./Design SE		Ritad/Drawn SE		Work.etc.	
Datum/Date 2009-05-18		Skala/Scale 1:1		Ämne/Blank	
pressmaster®		Benämning/Denomination		Vikt/Weight, gram 0.639 g	
ISO 9001 REG NR FM1367		KRIMPVERKTYG 683-1642		Art grp 012	
		CRIMPING TOOL		Ritn nr/Drawing no 43003713	
				REV 000	