


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	11.10.03'
②	BACKGROUND FORMAT UPDATED	10.04.08'
③	DEL INTERFACE	02.23.10'
④	ADD VSWR	11.09.12'
⑤	WORKING VOLTAGE → VOLTAGE RATING DEL PROOF VOLTAGE	08.13.14'

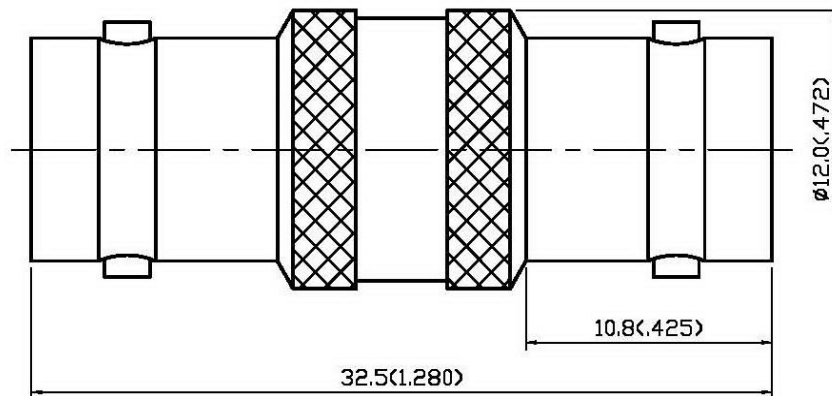

#### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚠
- 1.4 VSWR: 1.3 MAX. ⚠

#### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

#### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

#### 4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
4	WASHER	BRASS	1	SILVER 70μ" MIN.
3	INSULATION	TEFLON	2	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	SILVER 70μ" MIN.
1	BODY	BRASS	1	SILVER 70μ" MIN.



APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		STRAIGHT BNC JACK-JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	13-32-1 T.S.S	日期	DATE	版次	REV.	
	<i>Kristina</i>								
檢圖	CHECK	.XX ±0.1	單位	UNIT	DWG.NO.	13-0215	SCALE		
	<i>Arc</i>								
認定	APPROVAL	.XXX ±0.05	比例	SCALE					
	<i>Jenny</i>								