# **PHILIPS** Lighting



# **MASTER PL-C 2 Pin**

# MASTER PL-C 10W/865/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

#### Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- $\cdot$  Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**


| eneral Information         |                     | Luminous Flux (Rated) (Nom)        | 600 lm        |
|----------------------------|---------------------|------------------------------------|---------------|
| Cap-Base                   | G24D-1 [ G24d-1]    | Color Designation                  | Cool Daylight |
| Life To 10% Failures (Nom) | 6500 h              | Correlated Color Temperature (Nom) | 6500 K        |
| Life to 50% Failures (Nom) | 10000 h             | Luminous Efficacy (rated) (Nom)    | 56 lm/W       |
| LSF 2000 h Rated           | 99 %                | Color Rendering Index (Nom)        | 82            |
| LSF 4000 h Rated           | 98 %                | LLMF 2000 h Rated                  | 90 %          |
| LSF 6000 h Rated           | 92 %                | LLMF 4000 h Rated                  | 85 %          |
| LSF 8000 h Rated           | 78 %                | LLMF 6000 h Rated                  | 81 %          |
|                            |                     | LLMF 8000 h Rated                  | 77 %          |
| Light Technical            |                     |                                    |               |
| Color Code                 | 865 [ CCT of 6500K] | Operating and Electrical           |               |
| Luminous Flux (Nom)        | 600 lm              | Power (Nom)                        | 10.0 W        |

# **MASTER PL-C 2 Pin**

| Lamp Current (Nom)            | 0.190 A |
|-------------------------------|---------|
|                               |         |
| Temperature                   |         |
| Design Temperature (Nom)      | 28 °C   |
|                               |         |
| Controls and Dimming          |         |
| Dimmable                      | No      |
|                               |         |
| Mechanical and Housing        |         |
| Cap-Base Information          | 2 Pins  |
|                               |         |
| Approval and Application      |         |
| Mercury (Hg) Content (Nom)    | 1.4 mg  |
| Energy Consumption kWh/1000 h | 13 kWh  |
|                               |         |

| Product Data                    |                                    |  |  |
|---------------------------------|------------------------------------|--|--|
| Full product code               | 871150026461900                    |  |  |
| Order product name              | MASTER PL-C 10W/865/2P 1CT/5X10BOX |  |  |
| EAN/UPC - Product               | 8711500264619                      |  |  |
| Order code                      | 927903886502                       |  |  |
| Numerator - Quantity Per Pack   | 1                                  |  |  |
| Numerator - Packs per outer box | 50                                 |  |  |
| Material Nr. (12NC)             | 927903886502                       |  |  |
| Net Weight (Piece)              | 45.000 g                           |  |  |
| ILCOS Code                      | FSQ-10/65/1B-I-G24d=1              |  |  |
|                                 |                                    |  |  |


#### Dimensional drawing




Product D (max) D1 (max) A (max) B (max) C (max) MASTER PL-C 10W/865/2P 27.1 mm 27.1 mm 75.5 mm 95.0 mm 117.4 mm 1CT/5X10BOX


#### PL-C 10W/865/2P

### Photometric data

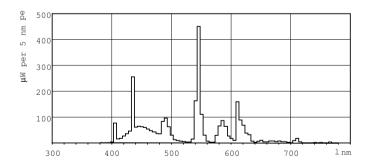


LDPB\_PLC2P\_865-Spectral power distribution B/W

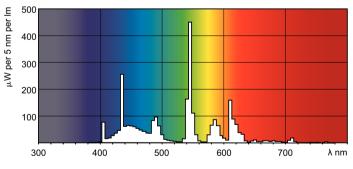




## **MASTER PL-C 2 Pin**


Lifetime

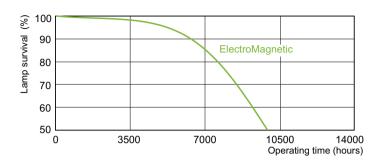



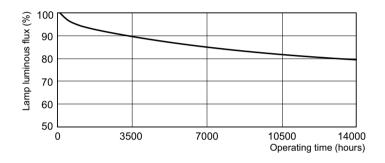

LDLM\_PLC2P\_0001-Lumen maintenance diagram



LDLE\_PLC2P\_0002-Life expectancy diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.