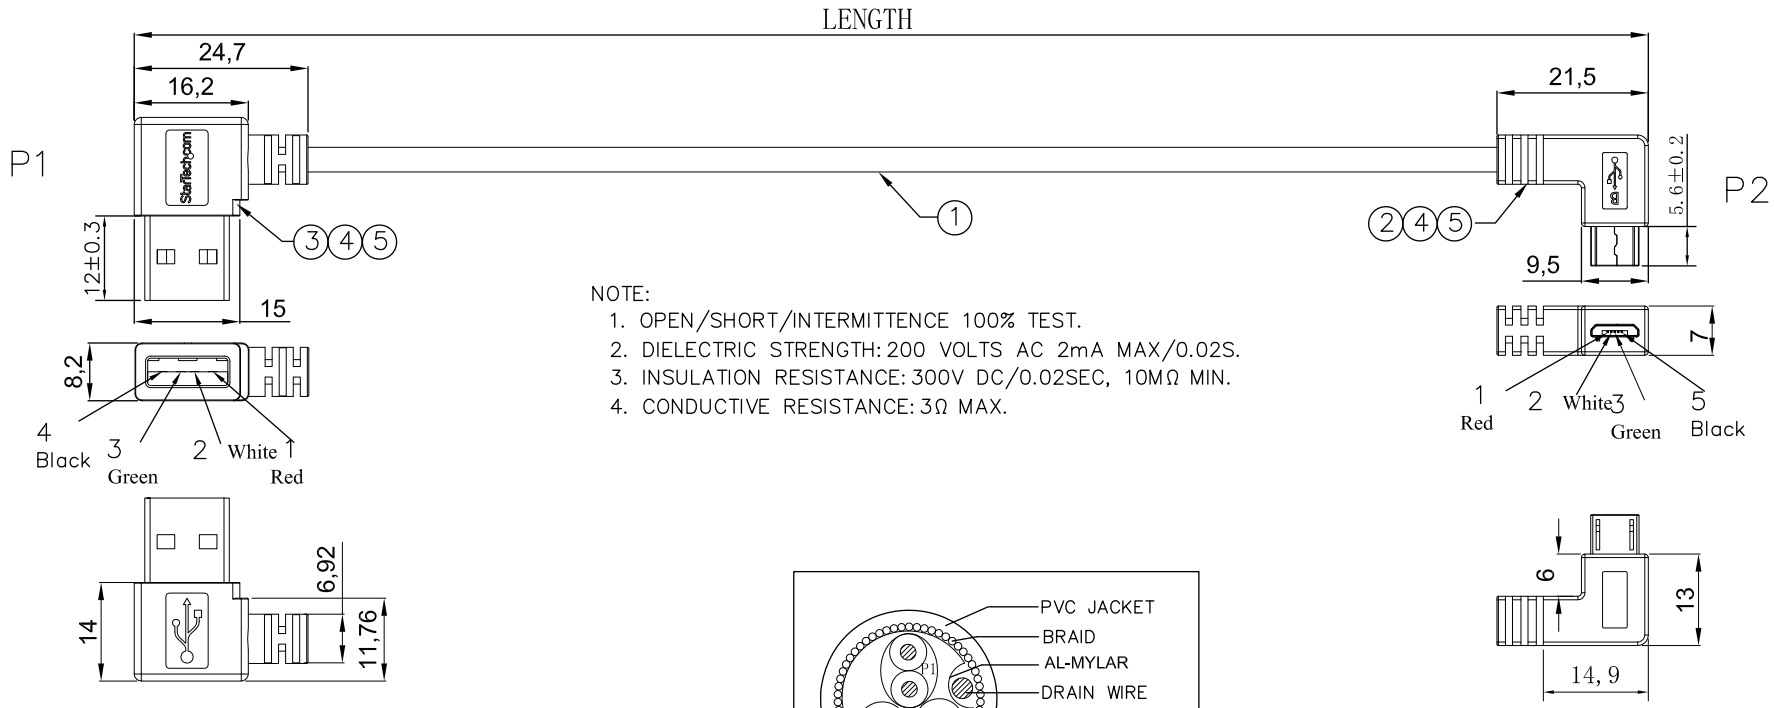

NOTE:
1. OPEN/SHORT/INTERMITTENCE 100% TEST.
2. DIELECTRIC STRENGTH: 200 VOLTS AC 2mA MAX/0.02S.
3. INSULATION RESISTANCE: 300V DC/0.02SEC, 10MΩ MIN.
4. CONDUCTIVE RESISTANCE: 3Ω MAX.

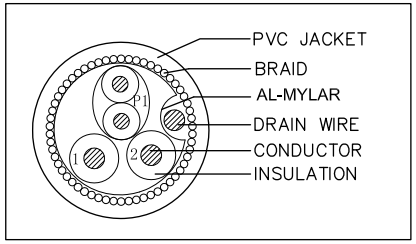

PIN ASSIGNMENT

P1	WIRE TYPE	P2	COLOR
1		1	RED
2		2	White
3		3	Green
4		5	BLACK
SHELL		SHELL	DRAIN

SKU	LENGTH
USB2AUB2RA1M	1000±30MM
USB2AUB2RA2M	2000±35MM

NO.	NAME	MATERIAL DESCRIPTION	Q'TY	UNITS
5	INNERMOLD	LD-PE	A/R	KG
4	OVER MOLD	PVC , COLOR: BLACK	A/R	KG
3	CONNECTOR	USB A/M?SOLDER TYPE) PIN: G/F,NICKEL PLATED FOR SHELL,WHITE INSULATION.	1	PCS
2	CONNECTOR	MICRO USB 5P/BM?SOLDER TYPE) PIN: G/F, NICKEL PLATED FOR SHELL,BLACK INSULATION.	1	PCS
1	CABLE	UL2725 30AWG*1P+24AWG*2C+AL/MY+D+B(16/3/0.12 AL-M)OD: 3.5MM COLOR: BLACK PVC JACKET	A/R	M

THIRD ANGLE PROJECTION

GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE

THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	USB2AUB2RAxM
DESCRIPTION	Micro-USB Cable with Right-Angled Connectors - M/M

DO NOT SCALE | SHEET: 1 OF: 1 | UPLOAD DATE: 4/18/2022