



# Datasheet


## Stock No. 190-2813, 190-2814, 190-2815, 190-2816 RS PRO STADY LIGHT/MULTI-FUNCTION CONNECTION BASE



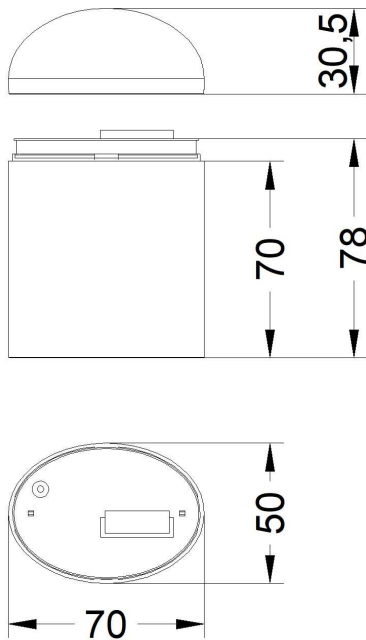
ENGLISH



Wiring base

<b>DOME</b>	PC
<b>GASKET</b>	O-Ring Silicone
<b>AVAILABLE COLOURS</b>	
<b>VOLTAGE</b>	12 Vdc/Vac - 24 Vdc/Vac - 120/240 Vac
<b>OPERATION</b>	∞
<b>LIGHT EFFECT</b>	Steady/Flashing
<b>FLASHES PER MINUTE</b> (MULTI-FUNCTION CONNECTIO BASE)	1F X 75, 2F X 90, 3F X 72, 5F X 70
<b>IP RATING</b>	IP66
<b>OPERATING TEMPERATURE</b>	-30°C+50°C

These data are disclosed only for information purposes. RS Components reserves the right to modify them at any time without prior notice.

<b>VIBRATIONS</b>	INDUSTRIAL CEI 60068-2-6 SINE
<b>CERTIFICATIONS, APPROVALS</b>	CE
<b>MOUNTING</b>	Stackable
<b>TECHNICAL DRAWING</b>	

**Article Number**
**Specifications**

1902813	Steady light connection base 24VAC/DC
1902814	Steady light connection base 120/240VAC
1902815	Multi-function connection base 24VAC/DC
1902816	Multi-function connection base 120/240VAC