


Datasheet

ENGLISH

RS ITEM NO 205-397

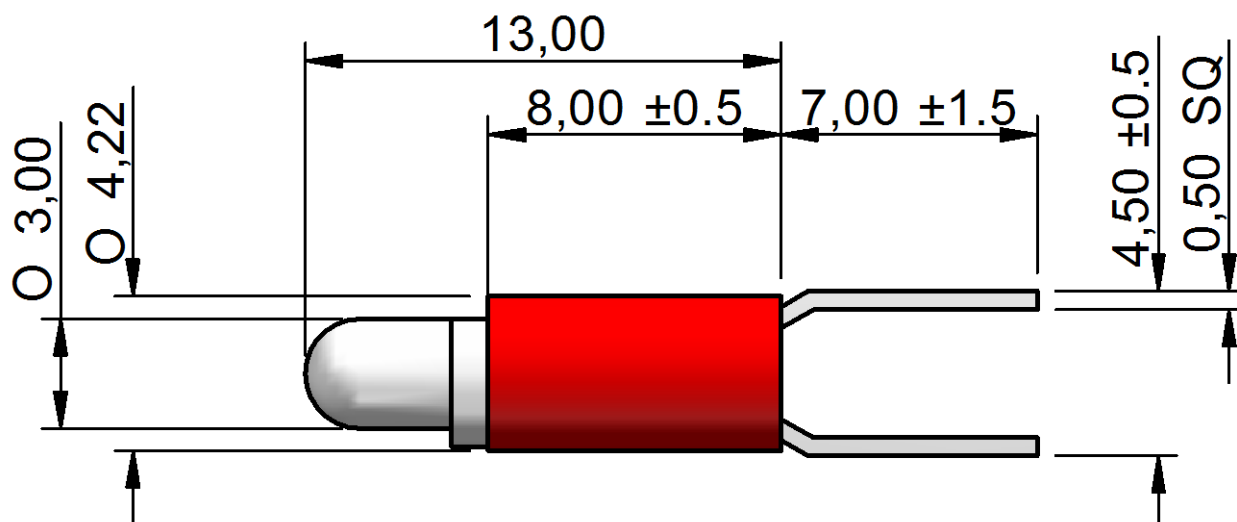

LED/Multiled	LED	Optimum voltage (V)	28Vac/dc	Intensity	3500mcd Typ
Mounting Size	Bi-Pin	Rectifier	-	Reverse Voltage	5Vdc
Mounting Finish	-	AC current	5mA		
Protection	-	DC current	10mA		
Mount Holder	-	Voltage Tolerance(%)	10%		
Chip Qty	-	Optimum temperature (°C)	-25°C...+60°C		
Indicator colour	Red	Storage temperature (°C)	-25°C...+60°C		
Wavelength (nm)	630nm	Contact Tab	Bi-Pin		



Dimension in mm (typical), not to scale.

We reserve the right to make changes without further notice to this product to improve reliability, function or design.