




ENGLISH


Product Datasheet

KY 30-04 WIRE 250V,24AWG 7/0.20mm TC

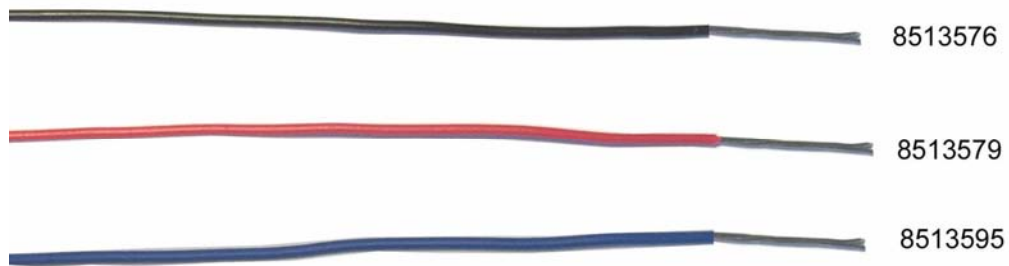

RoHS✓

Cross Section:



Characteristics:

Relevant Standards: NFC 93521 & NFC 32070/C1

Operating Voltage: 250 V

Operating Temperature (°C): -40 to 105 °C

Applications: These wires are mainly designed for internal wiring in electronic equipment.

Construction:

Inner Conductor: Tinned plated copper

Insulation: PVC

Marking: No

Specification:

Conductor				Overall Diameter (mm)		Conductor resistance (Ω/Km, at 20°C)	Mass
Size AWG	Area (mm ²)	O/D (mm)	Stranding (mm)	Min.	Max.	Max.	Average (Kg/Km)
24	0.22	0.60	7/ 0.20	1.00	1.20	94.2	2.8

Product Range:

RS Code

8513576

8513579

8513595

Description

KY30-04 BLACK,250M/PAPER REEL

KY30-04 RED,250M/PAPER REEL

KY30-04 BLUE,250M/PAPER REEL