


## Datasheet

Stock No: 136-7928

# RS Pro Surface Mount Buzzer, $\geq 85\text{dB}$

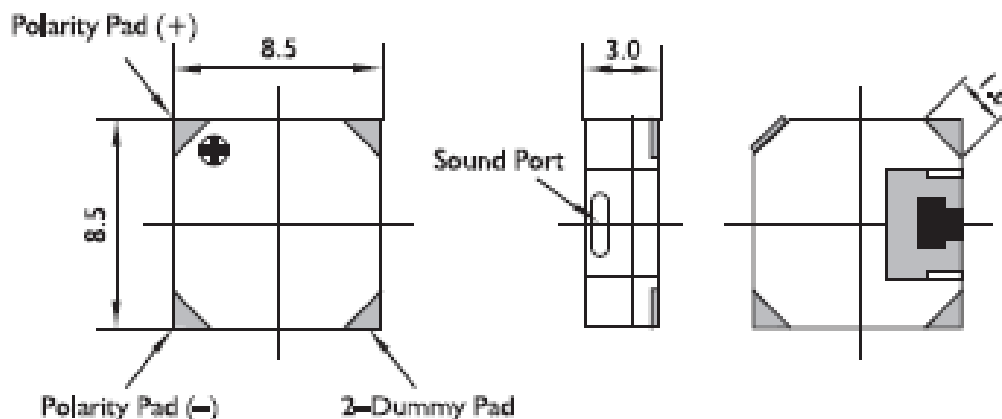

### Specifications:

Operating voltage: 2.5-4.5Vp-p

Rated voltage: 3.6Vp-p

Rated current:  $\leq 90\text{mA}$

Sound output at 10cm rated voltage: 85dBA

Resonant frequency: 2730Hz

Coil Resistance:  $16\pm 3\Omega$

Operating temperature:  $-30\sim +80^{\circ}\text{C}$

Storage temperature:  $-40\sim +85^{\circ}\text{C}$

Weight: 0.5g

- Housing material: LCP
- Requires additional electronic circuitry to operate as a sounder
- Black in colour
- RoHS compliant
- Very small and low profile.
- Electro Mechanical SMT buzzer

Reflow solder profile

