

Datasheet

RS PRO VINYL-INSULATED (EASY ENTRY) RING TERMINALS

Stock number: 178-8675

MAXIMUM ELECTRIC CURRENT:


| | | | | |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP. | 9 | 12 | 17 | 18 |

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL (PVC)

TERMINAL MATERIAL: COPPER

INSULATION COLOR: RED

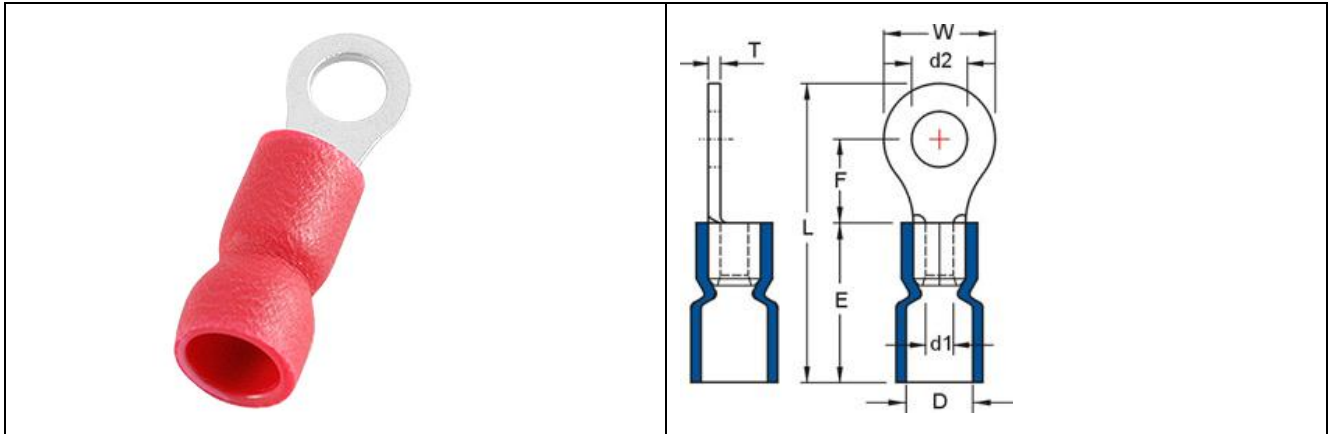

| WIRE RANGE A.W.G. mm ² | ITEM NO. BUTTED SEAM | STUD SIZE d2 | DIMENSION inch(mm) | | | | | | | |
|---|-------------------------|-----------------|--------------------|------------|------------|-------------|---------------|----------------|--------------|---------------|
| | | | W | F | L | E | D | d1 | T | |
| 22-16 A.W.G. 0.5-1.5 mm ² | 178-8675 | #8 | 0.169 4.3 | 0.315 8 | 0.276 7 | 0.866 22 | 0.441 11.2 | 0.157 4.000 | 0.067 1.7 | 0.031 0.75 |