



# Datasheet

## RS PRO 1.8M USB TO SERIAL ADAPTER – FTDI CHIPSET


Stock number: 2369134

EN

The RS PRO USB to serial adapter has an ABS shell on the DB 9-way male connection and a 45cm cable flex made from PVC to the USB A male connector.

It uses the popular FTDI chipset which windows will install the first time it is connected to a PC and has a transfer rate of up to 2400-115200bps.

Serial to USB adapters are used to connect serial devices to PC's which only have a USB port.

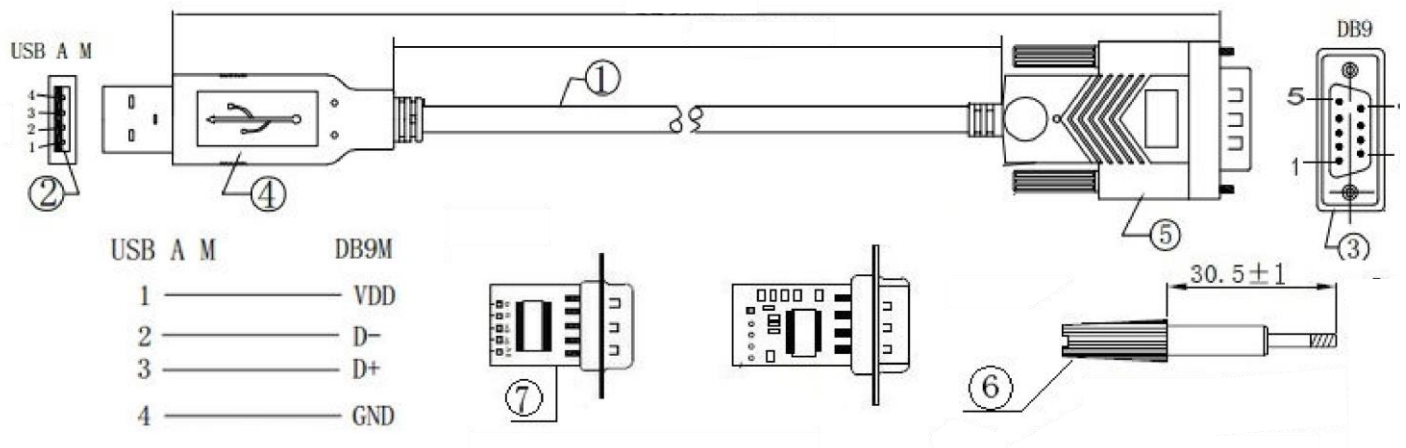

RoHS / REACH / CE / UKCA

[rspro.com](http://rspro.com)