

New!!

AIR-OPERATED GREASE LUBRICATOR

Model No. 687061

Model SKR-66C

The new YAMADA operated grease lubricator "SKR-66C" has been put on market with new design and more features.



Model No. 687061

Model SKR-66C

Specification

Model	SKR-66C
Model No.	687061
Pump Ratio	50×1
Material connection	G 1/4 (F)
Air Connection	G 1/4 (F)
Operation air pressure range	0.2 - 0.8 MPa
Noise	90 dB
Operating temperature range	-20 - 50 °C
Pump stroke length	35 mm
Discharge Volume	0.85 L / min
Maximum discharge pressure	40 MPa
Weight	20 kg
Applicable Grease	NLGI No.0 ~ 2 *
Standard Accessories	<ul style="list-style-type: none">• Air Coupler• Grease Hose• High- pressure Grease gun

* NLGI is only standard measure.

Applicability still depends on the property or condition of grease.



- **High performance grease pump**

50:1 ratio grease pump is designed to work in tough conditions and ideal for transfer in high volume.

- **High pressure grease gun**

New style of high pressure grease gun is more convenient.

It is easy to change the nozzle to micro hose.

- **Air Regulator and Air Coupler are equipped as standard**


- **High pressure grease hose**

1/4" X 4m high pressure grease hose is equipped.

Pail storable bucket



Follower plate fits to pail is equipped as standard

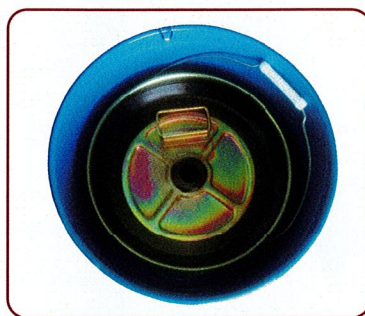

Support spring

