


# NSYPLM32G

Wall mounted ABS + PC enclosure, Thalassa PLM, plain door, 310x215x160mm, IP66, IK10, RAL 7035

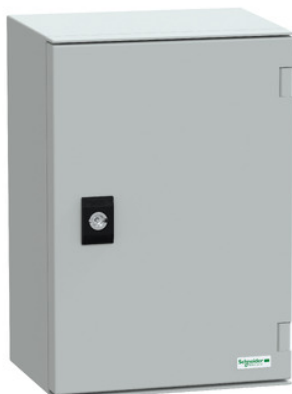

## Main

Range	Thalassa
Product name	Thalassa PLM
Device short name	PLM
Enclosure type	Multi-purpose
Category	Compact enclosure
Nominal height	310 mm
Nominal width	215 mm
Nominal depth	160 mm
Enclosure mounting	Wall mounted
Device composition	1 body 1 door 1 lock
Door type	Plain
Lock type	3 mm double-bar lock

## Complementary

Number of locks	1
Mounting plate description	Without mounting plate
Accessibility for operation	Front
Removable parts	Door by hinges
Material	ABS + PC
Colour	Grey (RAL 7035)
Standards	NEMA classification 4X IEC 62208 NEMA classification 13
Electrical insulation class	Class II

## Environment

IP degree of protection	IP66 conforming to IEC 60529
IK degree of protection	IK10 conforming to IEC 62262
Fire resistance	960 °C conforming to IEC 62208
Ambient air temperature for operation	-40...80 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	22 cm
Package 1 Width	18.01 cm
Package 1 Length	32 cm
Package 1 Weight	1.45 kg
Unit Type of Package 2	P12
Number of Units in Package 2	70
Package 2 Height	129 cm
Package 2 Width	80 cm

Package 2 Length	120 cm
Package 2 Weight	111 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations