

FEATURES

- Low gas emissions
99% plus recombination
- Excellent recovery from deep discharge
- Leak proof – Sealed batteries
- ABS resin case to UL94-HB conform
- Road transport to UN2800 (Batteries, Wet, Non-Spillable)
- Air Transport to Special Provision 'A67' 'IATA' & 'ICAO'. (Batteries, Wet, Non-Spillable)

RS PRO Lead Acid Battery 12V, 4Ah

RS Stock No.: 698-8091



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Lead acid batteries are suitable for use across a number of industries as well as for general purpose. They are sealed and have many uses, and are ideal for standby & float applications. These batteries are long life rechargeable batteries.

General Specifications

Technology	AGM
Designed for Cyclic Application	No
Eurobat Classification	3 to 5 Years,
Container Material	A.B.S. (UL94-HB) conform
Application	Standby & Float applications

Electrical Specifications

Capacity	4Ah
Nominal Voltage	12V
Terminal Type	T1
Cells Per Unit	6V
Voltage Per Unit	12V
Max. Discharge Current	60A (5 sec)
Max. Charging Current Limit	1.20A
Float charging Voltage	13.5VDC to 13.8VDC/unit Average at 25°C
Internal Resistance	40mOhm
Equalization and Cycle Service	14.4VDC to 15.0VDC/unit Average at 25°C

Self-Discharge	The batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
-----------------------	--

Mechanical Specifications

Dimensions	90mm x 70mm x 101mm
Height	90mm
Length	70mm
Width	101mm
Weight	1.5kg

Operation Environment Specifications

Operating Temperature Range	Discharge : -15°C to 50°C Charge : 0°C to 40°C Storage : -15°C to 40°C
Nominal Operating Temperature Range	25 ±3°C (77 ±5°F)

Approvals

Compliance/Certifications	UL94-HB
----------------------------------	---------





Available Capacity Subject to Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%

Constant Current Discharge Characteristics : A (25°C) Amps

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	7.68	5.35	4.42	3.83	3.07	2.36	1.93	1.18	0.899	0.739	0.627	0.543	0.432	0.359	0.198
1.80V/cell	9.44	6.39	5.12	4.33	3.40	2.58	2.08	1.25	0.945	0.777	0.654	0.567	0.448	0.372	0.200
1.75V/cell	11.2	7.22	5.65	4.72	3.63	2.74	2.19	1.31	0.979	0.801	0.672	0.581	0.460	0.379	0.202
1.70V/cell	12.7	7.97	6.11	5.06	3.82	2.84	2.28	1.36	1.01	0.821	0.689	0.595	0.467	0.386	0.206
1.65V/cell	14.0	8.57	6.46	5.32	3.98	2.95	2.38	1.40	1.04	0.838	0.704	0.607	0.475	0.391	0.208
1.60V/cell	14.7	8.93	6.74	5.48	4.09	3.02	2.43	1.45	1.06	0.859	0.718	0.619	0.485	0.398	0.210

Constant Power Discharge Characteristics : W (25°C) Watts

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	14.5	10.2	8.49	7.42	5.99	4.63	3.81	2.34	1.79	1.47	1.26	1.09	0.869	0.724	0.400
1.80V/cell	17.6	12.0	9.76	8.33	6.59	5.02	4.07	2.47	1.87	1.54	1.30	1.13	0.896	0.745	0.402
1.75V/cell	20.6	13.5	10.7	9.00	6.99	5.30	4.26	2.56	1.92	1.58	1.33	1.15	0.914	0.755	0.403
1.70V/cell	23.1	14.7	11.4	9.59	7.29	5.47	4.42	2.65	1.97	1.61	1.35	1.17	0.922	0.763	0.408
1.65V/cell	25.1	15.6	12.0	9.96	7.53	5.65	4.57	2.71	2.01	1.63	1.38	1.19	0.933	0.770	0.412
1.60V/cell	26.0	16.1	12.3	10.2	7.67	5.72	4.64	2.78	2.05	1.66	1.40	1.21	0.947	0.779	0.412

Discharge Current VS. Discharge Voltage


Final Discharge Voltage V/cell	1.80V	1.75V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.


Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h,Max. Current 0.3CA
Constant Current	0.1C until the voltage reaching 14.4V,then 0.1Cx4h

Effect of Temperature on Long Term Float Life

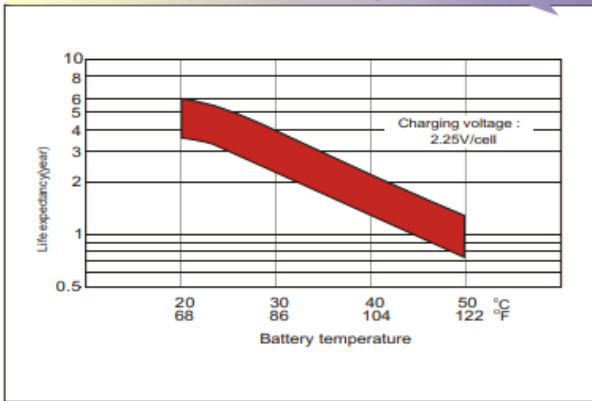


Self Discharge Characteristics

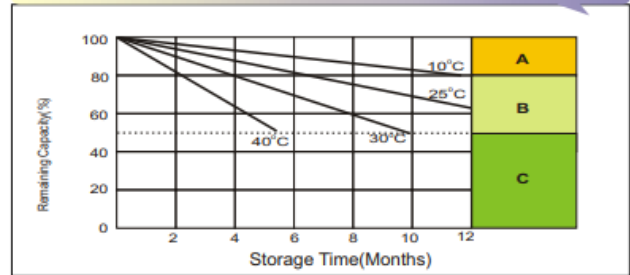


- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8-10 hours at limited current 0.05CA.
- C** Avoid this storage period unless regular Top charge. Supplementary charge may often fail to recover the full capacity

Float Charging Characteristics

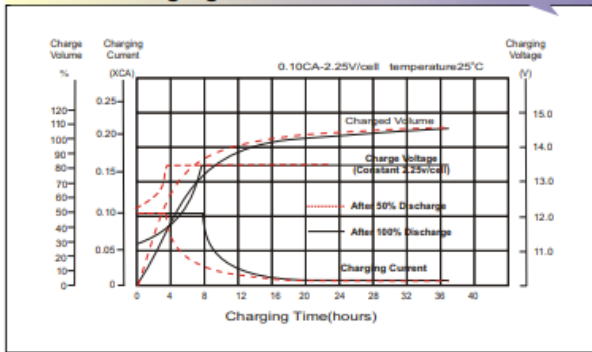

Discharge Characteristics

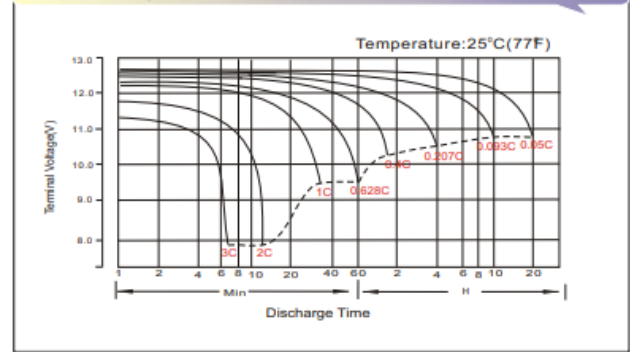

Dimensions

