


## Datasheet

# RS PRO TWIN MEDIUM LAPPED SCREEN CABLE 25M

Stock No: 2075339

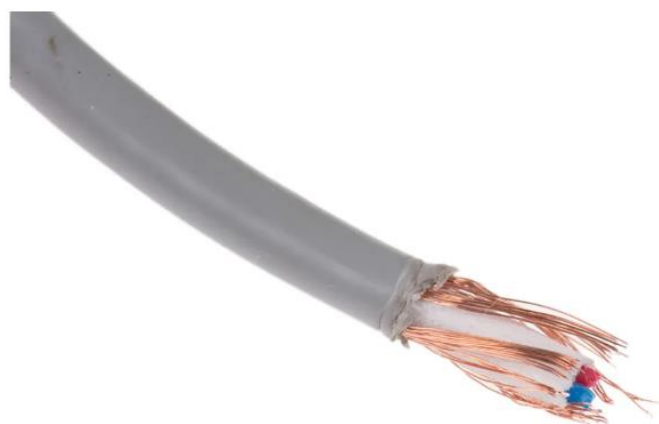


## Technical Specifications:

Conductor	Bare Copper	Cotton Paper	Yes
Cores Number	2C	Spiral	Bare Copper
Size(mm <sup>2</sup> )	0.14	Construction(±0.008mm)	66/0.10BC
Construction(±0.008mm)	18/0.10	Coverage	≥91%
Stranded Dia.(mm)	0.49	Jacket Color	Grey (RAL7001)
Insulation 1 Material	PE	Ave Thickness(mm)	0.65
Insulation 1 Color	Red, Blue	Min Thickness(mm)	0.48
Ave Thickness(mm)	0.30	Outer Dia(±0.15mm)	3.70
Min Thickness(mm)	0.24		
Insulation 1 Dia.(±0.10mm)	1.10		
Filler	Cotton Yarn		
Cabling	Yes		

## Features & Benefits:

- **Operating temperature: -20~+60 °C**
- **Conductor resistance(20°C Ω/km): 132 max.**
- **Insulation DC Resistance(20°C MΩ\*Km): 500 min.**
- **Operating voltage: 30 V**

## Cross Section drawings



**Cable Marking:** RS PRO 2 Core×0.14mm<sup>2</sup>  
Screened Cable 30V

## Applications:

This multicore microphone cable can be soldered to standard jack and XLR connectors to make custom audio cables that can connect microphones and instruments to mixers or amplifiers. This high-quality audio cable is suitable for;

- Live stages and theatres
- Professional studio setups
- Hobbyist and custom audio setups